



CENTRIQ FAMILY

CENTRIQ FAMILY CATALOGUE | AUGUST 2023
ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated. All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at

PROLICHT MAKES A DIFFERENCE

If you promise your demanding clients bespoke, high-tech, quality products, you can't have them made just anywhere. We manufacture our products where the best trained technicians, engineers and designers find themselves at home: right in the middle of the Tyrolean Alps.


At the end of the day, it is their skill that makes a difference. And it is their expertise that has made PROLICHT one of the world's most successful premium manufacturers of architectural lighting concepts. Sustainably produced and custom made in Europe.





YOUR PROJECT
MAKES YOUR PRODUCT

INSPIRATION | MOZING STUDIO

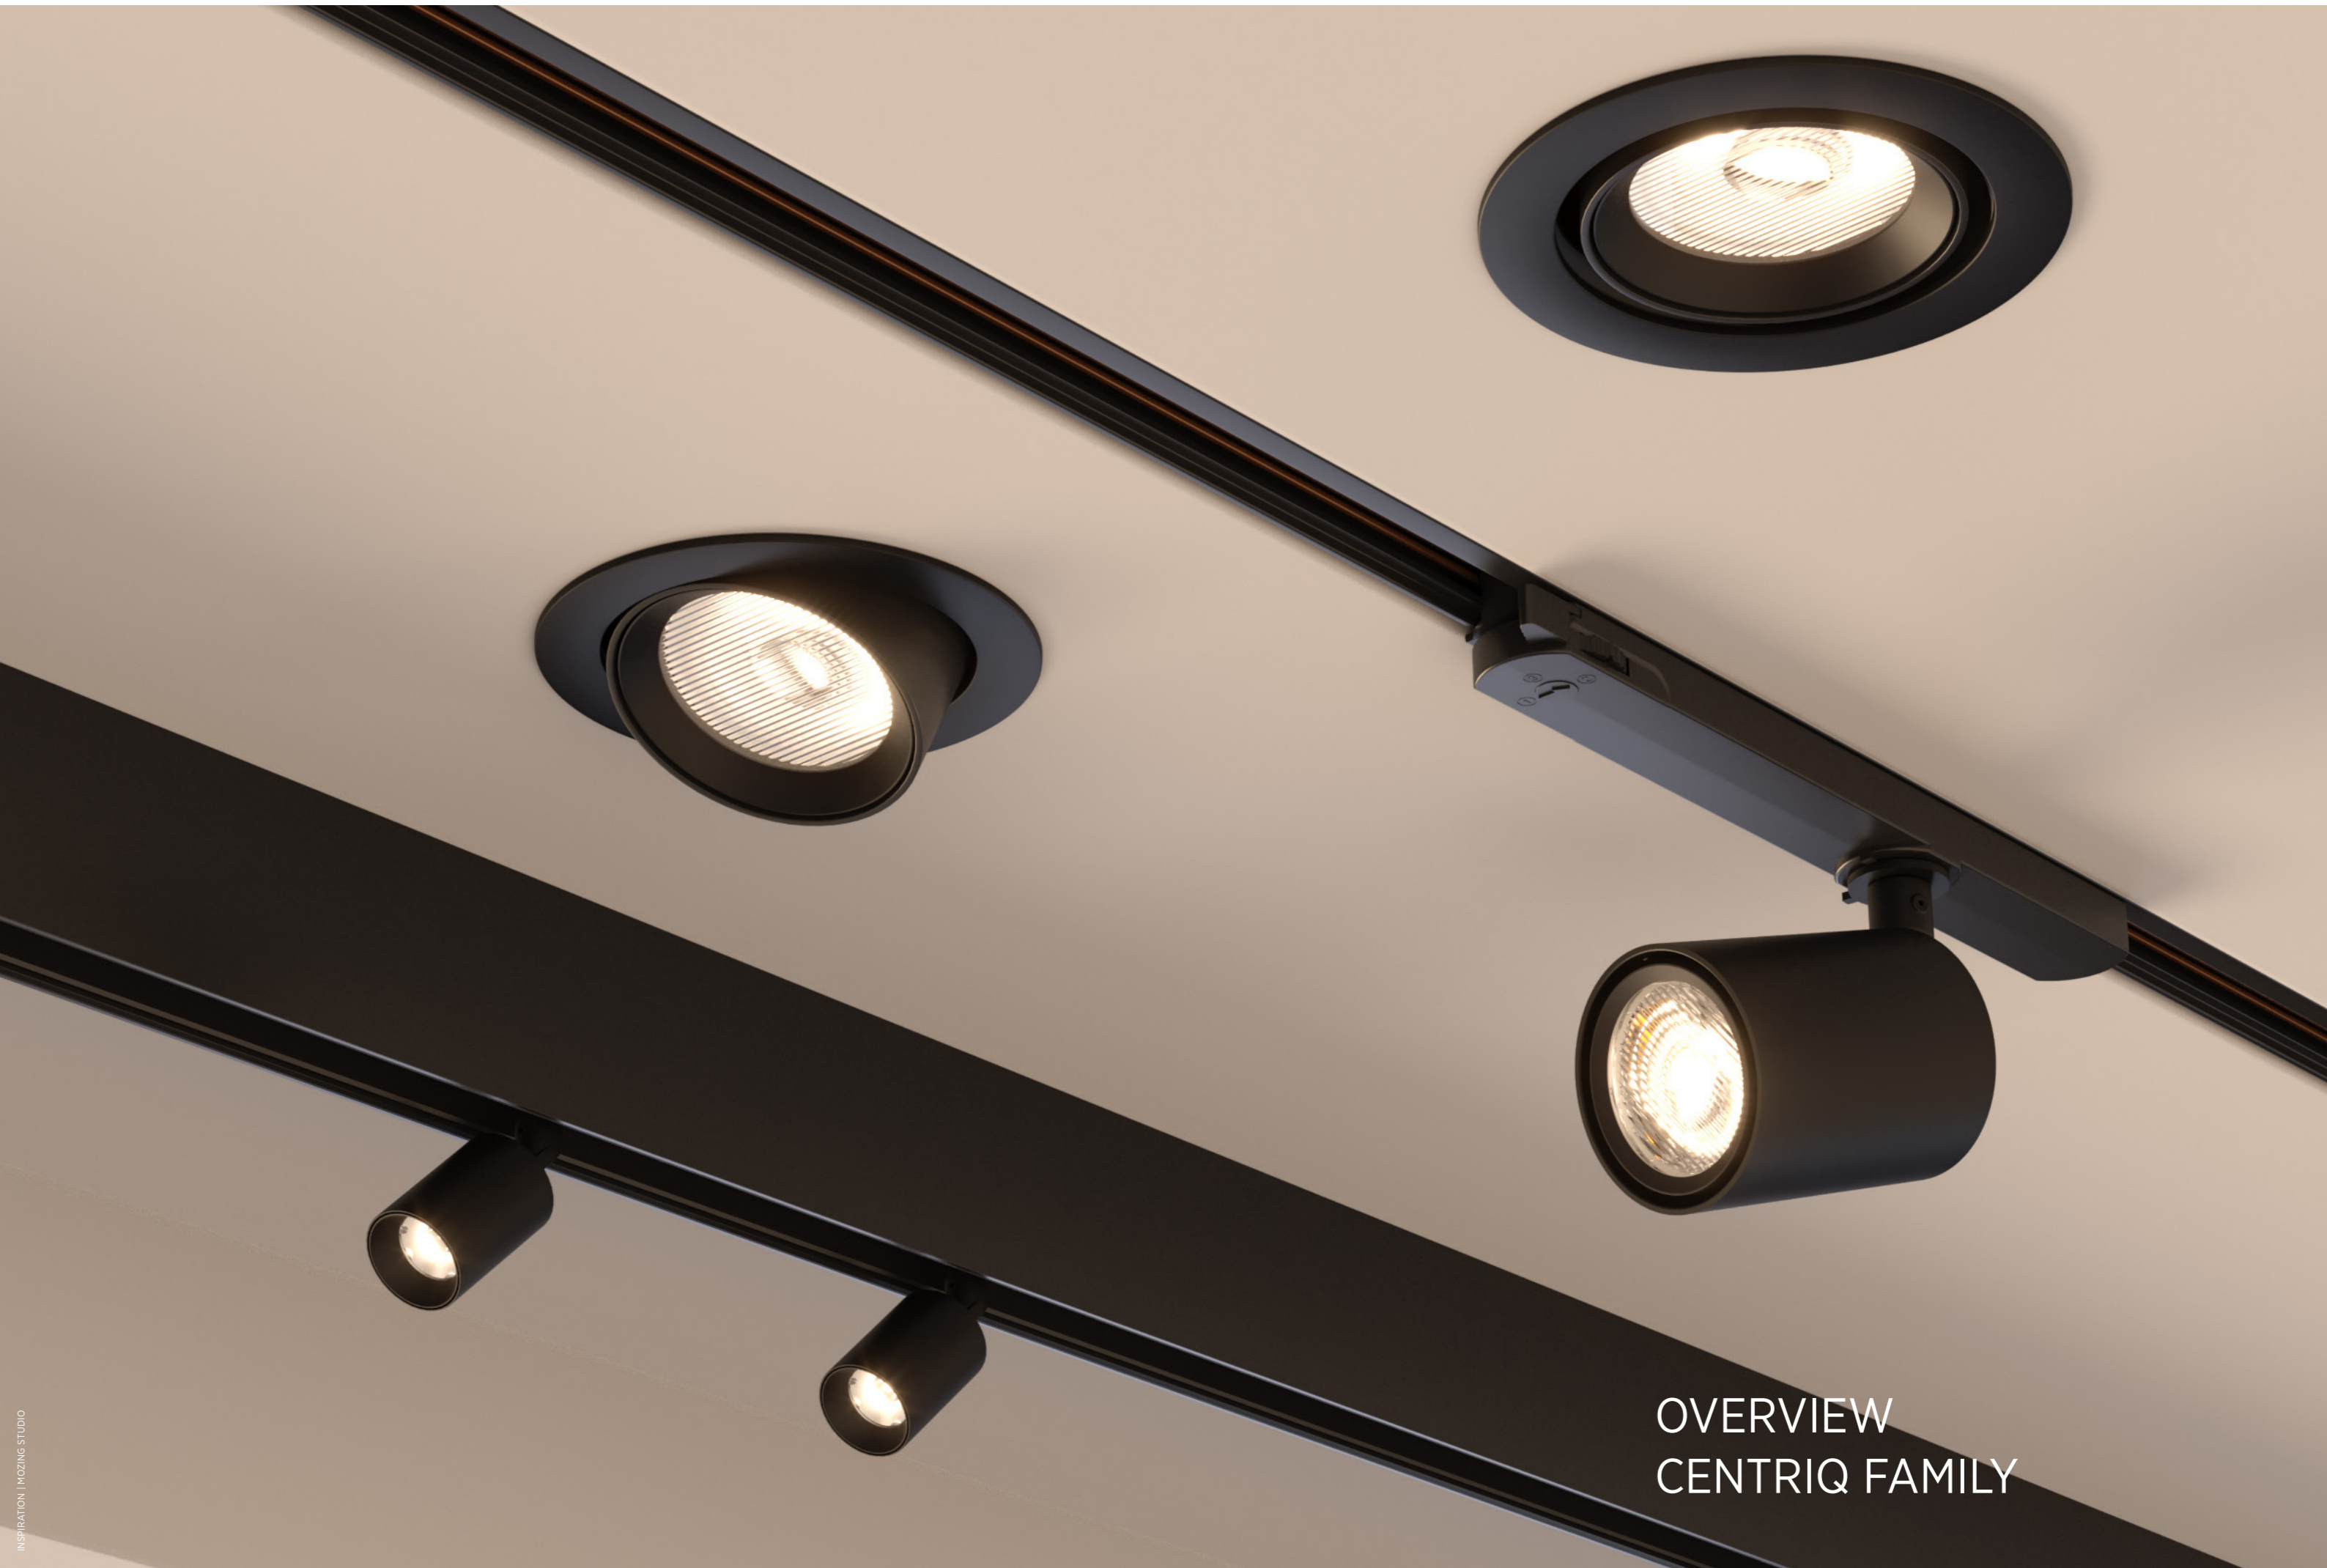

OVERVIEW
CENTRIQ FAMILY

CENTRIQ OVERVIEW

2 SHAPES



ROUND

SQUARE

LIGHT TECHNICAL OPTIONS



FIXED LENS

FLEX

2 MOUNTING OPTIONS



RECESSED

TRACKLIGHT

5 OPTICS



WALLWASH

SUPERSPOT 10° & SPOT 15°

MEDIUM 32°

FLOOD 36°

WIDE FLOOD 54°

FLEX up to SPOT 14° - WIDEFLOOD 46°

LENS PACK



SPREAD LENS

SPREAD LENS LINEAR

HONEY COMB

PERFORMANCE CENTRIQ IN



STANDARD
Ø 83
output max. 3450 lm

HIGH OUTPUT
Ø 83
output max. 4312 lm

CEILING



PLASTERBOARD


WOOD

CONCRETE

EXPOSED CONCRETE

METAL

PROFIL SYSTEM

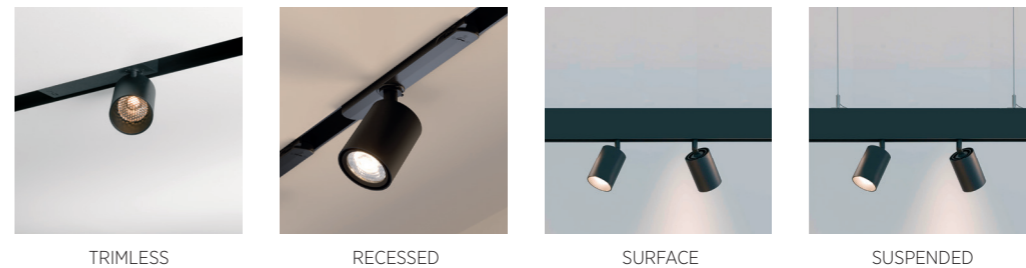

TRIMLESS

RECESSED


SURFACE

SUSPENDED

IP INTERNAL PROTECTION

IP20

COLOR TEMPERATURE CCT

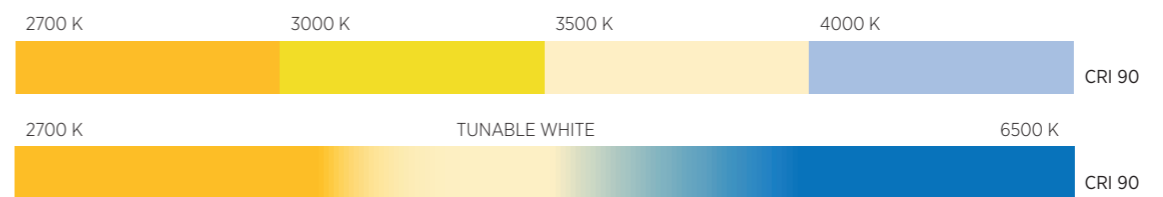

COLOR ADAPTER



RAL Classic or any other special color on request



MARCCAIN INNSBRUCK PHOTO: ARMIN KUPRIAN



CENTRIQ SQUARE | COLOR 03 CRYSTAL WHITE



PHOTO: ARMIN KUPRIAN


CENTRIQ ROUND & SQUARE

Our proven CENTRIQ spotlight is now also available as a recessed version. This adds another mounting type to the family portfolio and gives you even more options to realize a consistent luminaire concept.

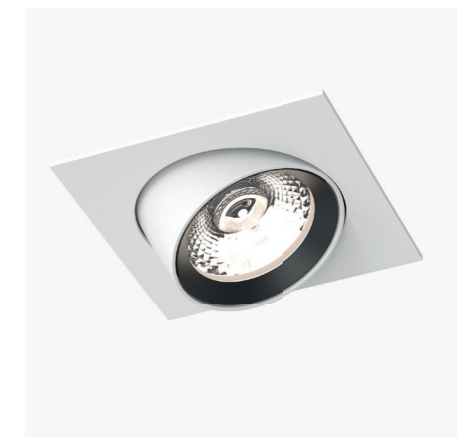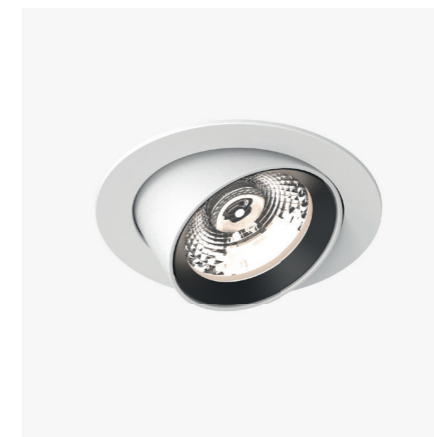



CENTRIQ SQUARE

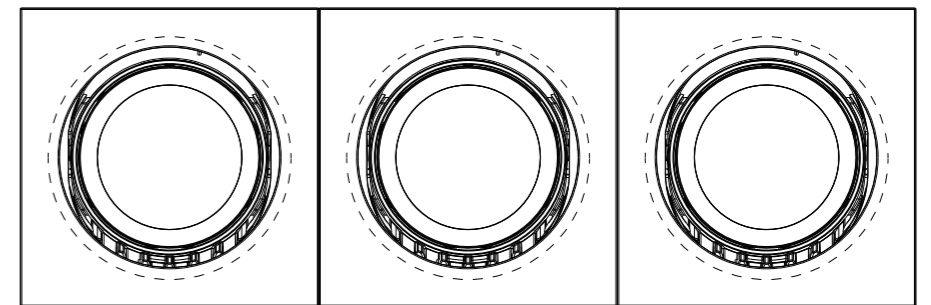

CENTRIQ WITH CONCRETE RING ROUND | SQUARE


CENTRIQ offers numerous benefits that support you in fulfilling your lighting vision. For concrete installations, a special version for CENTRIQ SQUARE was created to complete the universal application.



CONCRETE RING ROUND: 800 - 1452



CONCRETE RING SQUARE: 800 - 1453


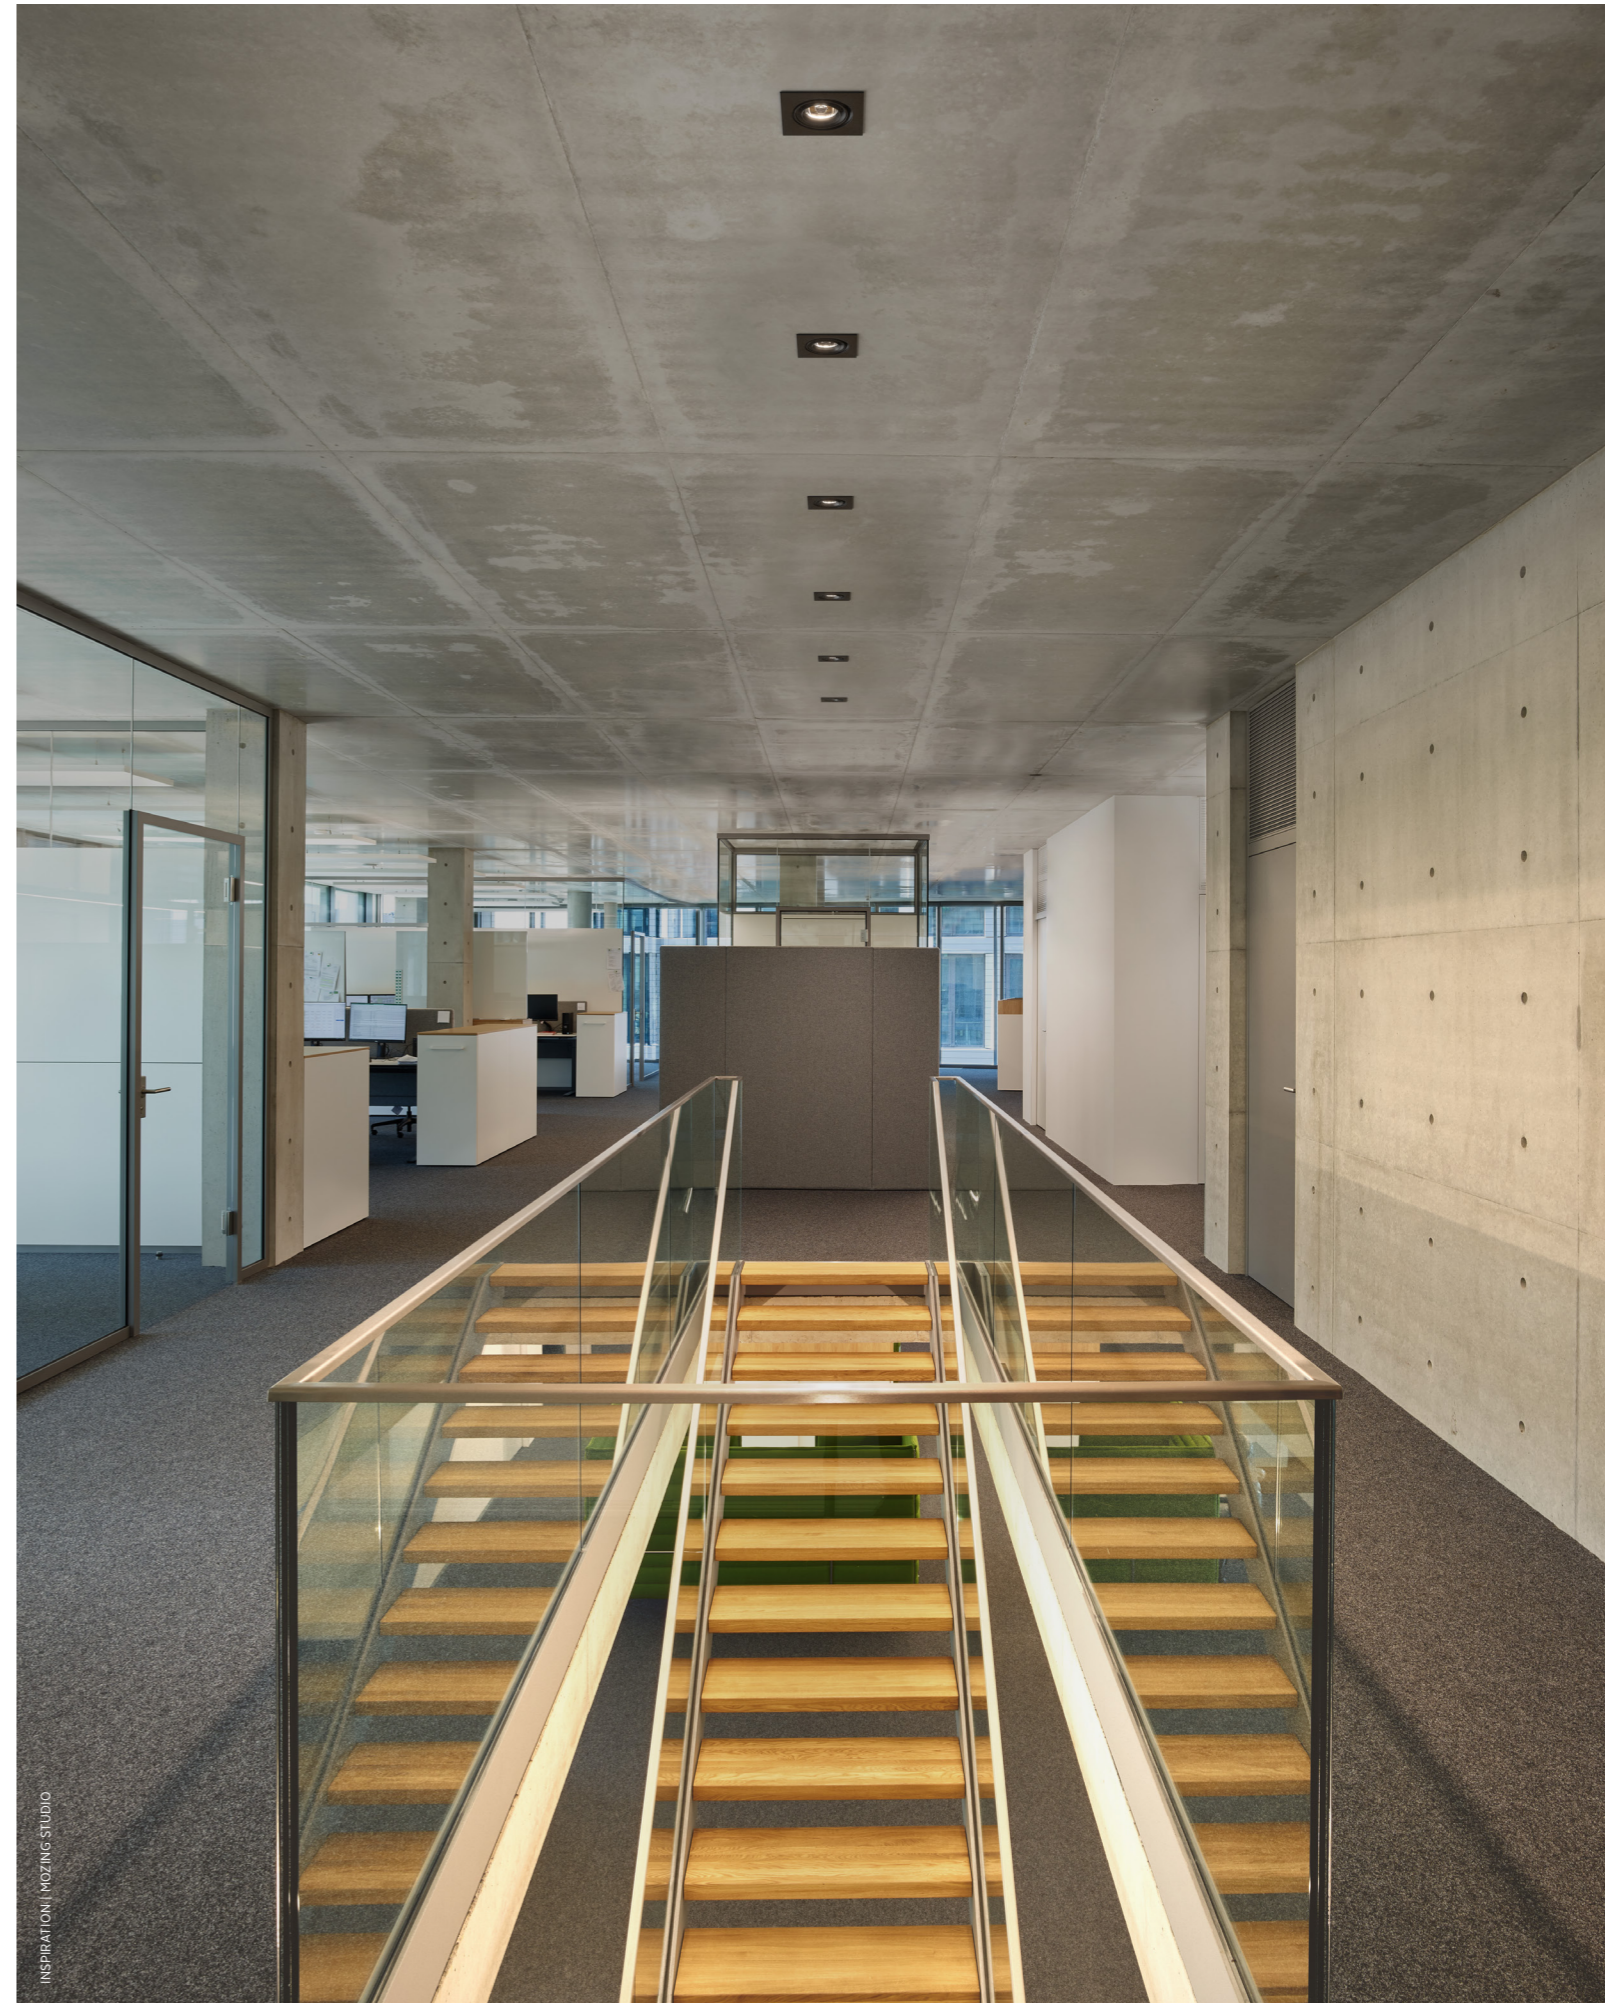


INSPIRATION | MOZING STUDIO

CENTRIQ SQUARE WITH CONCRETE RING | COLOR 25 GUN METAL

CENTRIQ FLEX ROUND & SQUARE

The CENTRIQ portfolio is perfectly tuned: you can choose between four fixed beam angles or a FLEX version. In addition, the family offers four standard light colors to enable the fastest possible configuration, or a TUNABLE WHITE version to cover the entire RETAIL lighting range in one luminaire. As simple or as complex as possible - CENTRIQ leaves the choice up to you. Individual wishes for light color and color rendering can be realized in the easiest manner!

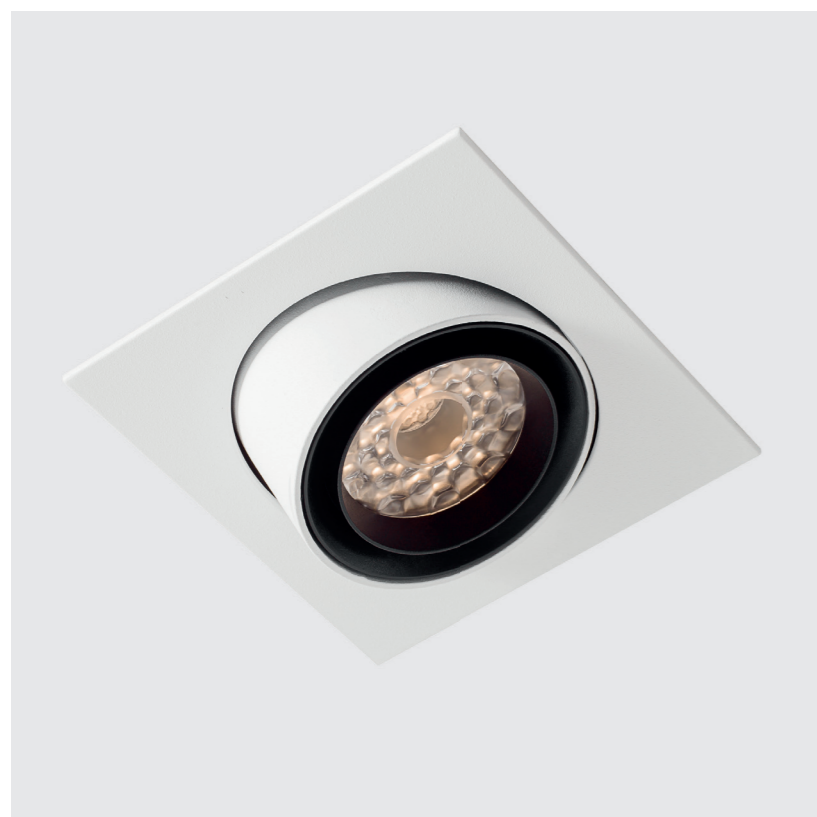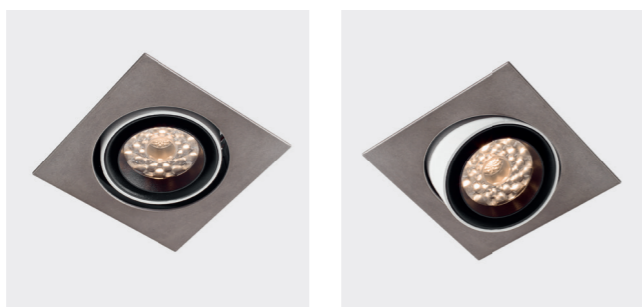

MARC CAIN INNSBRUCK | PHOTO: ARMIN KUPRIAN

CENTRIQ IN

Our CENTRIQ IN inserts are changing the RETAIL lighting market substantially. Available in a wide variety of designs, the spotlights can now also be used with the 2LOOK4 50 track and enable flexible state-of-the-art lighting design at a fair price. The CENTRIQ IN 3-phase spotlight is now complemented by a new HIGH OUTPUT version to provide additional lumens for demanding projects.



BRÜNDL SPORTS KAPRUN | PHOTO: JOACHIM GROTHUS

CENTRIQ IN | HYPRO 40: COLOR 02 BLACK VELVET



BRÜNDL SPORTS KAPRUN | PHOTO: JOACHIM GROTHUS



BRÜNDL SPORTS KAPRUNI PHOTO: JOACHIM GRÖTHJUS



TUNABLE WHITE

TUNABLE WHITE is the perfect choice for an installation capable of adapting to the needs of human beings, mimicking the evolution of natural light during the day, or defining with specific settings the most comfortable scenario that each user can define.



TUNABLE WHITE allows infinitely variable adjustment of the color temperature between 2700 K and 6500 K. All variants of the CENTRIQ family can be equipped with this technology to guarantee maximum flexibility.



CENTRIQ IN SUPERSPOT

CENTRIQ super spots with very small beam angles make it possible to create lighting scenarios with unique accentuation and dramatic contrasts. CENTRIQ spotlights can be perfectly adapted to any lighting situation.

For total control and maximum personalization of the optics, each module can be equipped with elliptical lenses, spread lenses or with a honeycomb filter.



SPREAD LENS



SPREAD LENS LINEAR



HONEY COMB

BLACK OR WHITE

To support a consistent and harmonious interior concept, various components of the luminaire can be individually configured in our 25 PROLICHT colors. In addition to the consistent design in black, a newly available adapter allows a complete configuration in white for a discreet design that directs the attention to the light.



CENTRIQ IN | HOUSING: COLOR 02 BLACK VELVET, ADAPTER: WHITE



CENTRIQ IN | HOUSING: COLOR 03 CRYSTAL WHITE, ADAPTER: WHITE


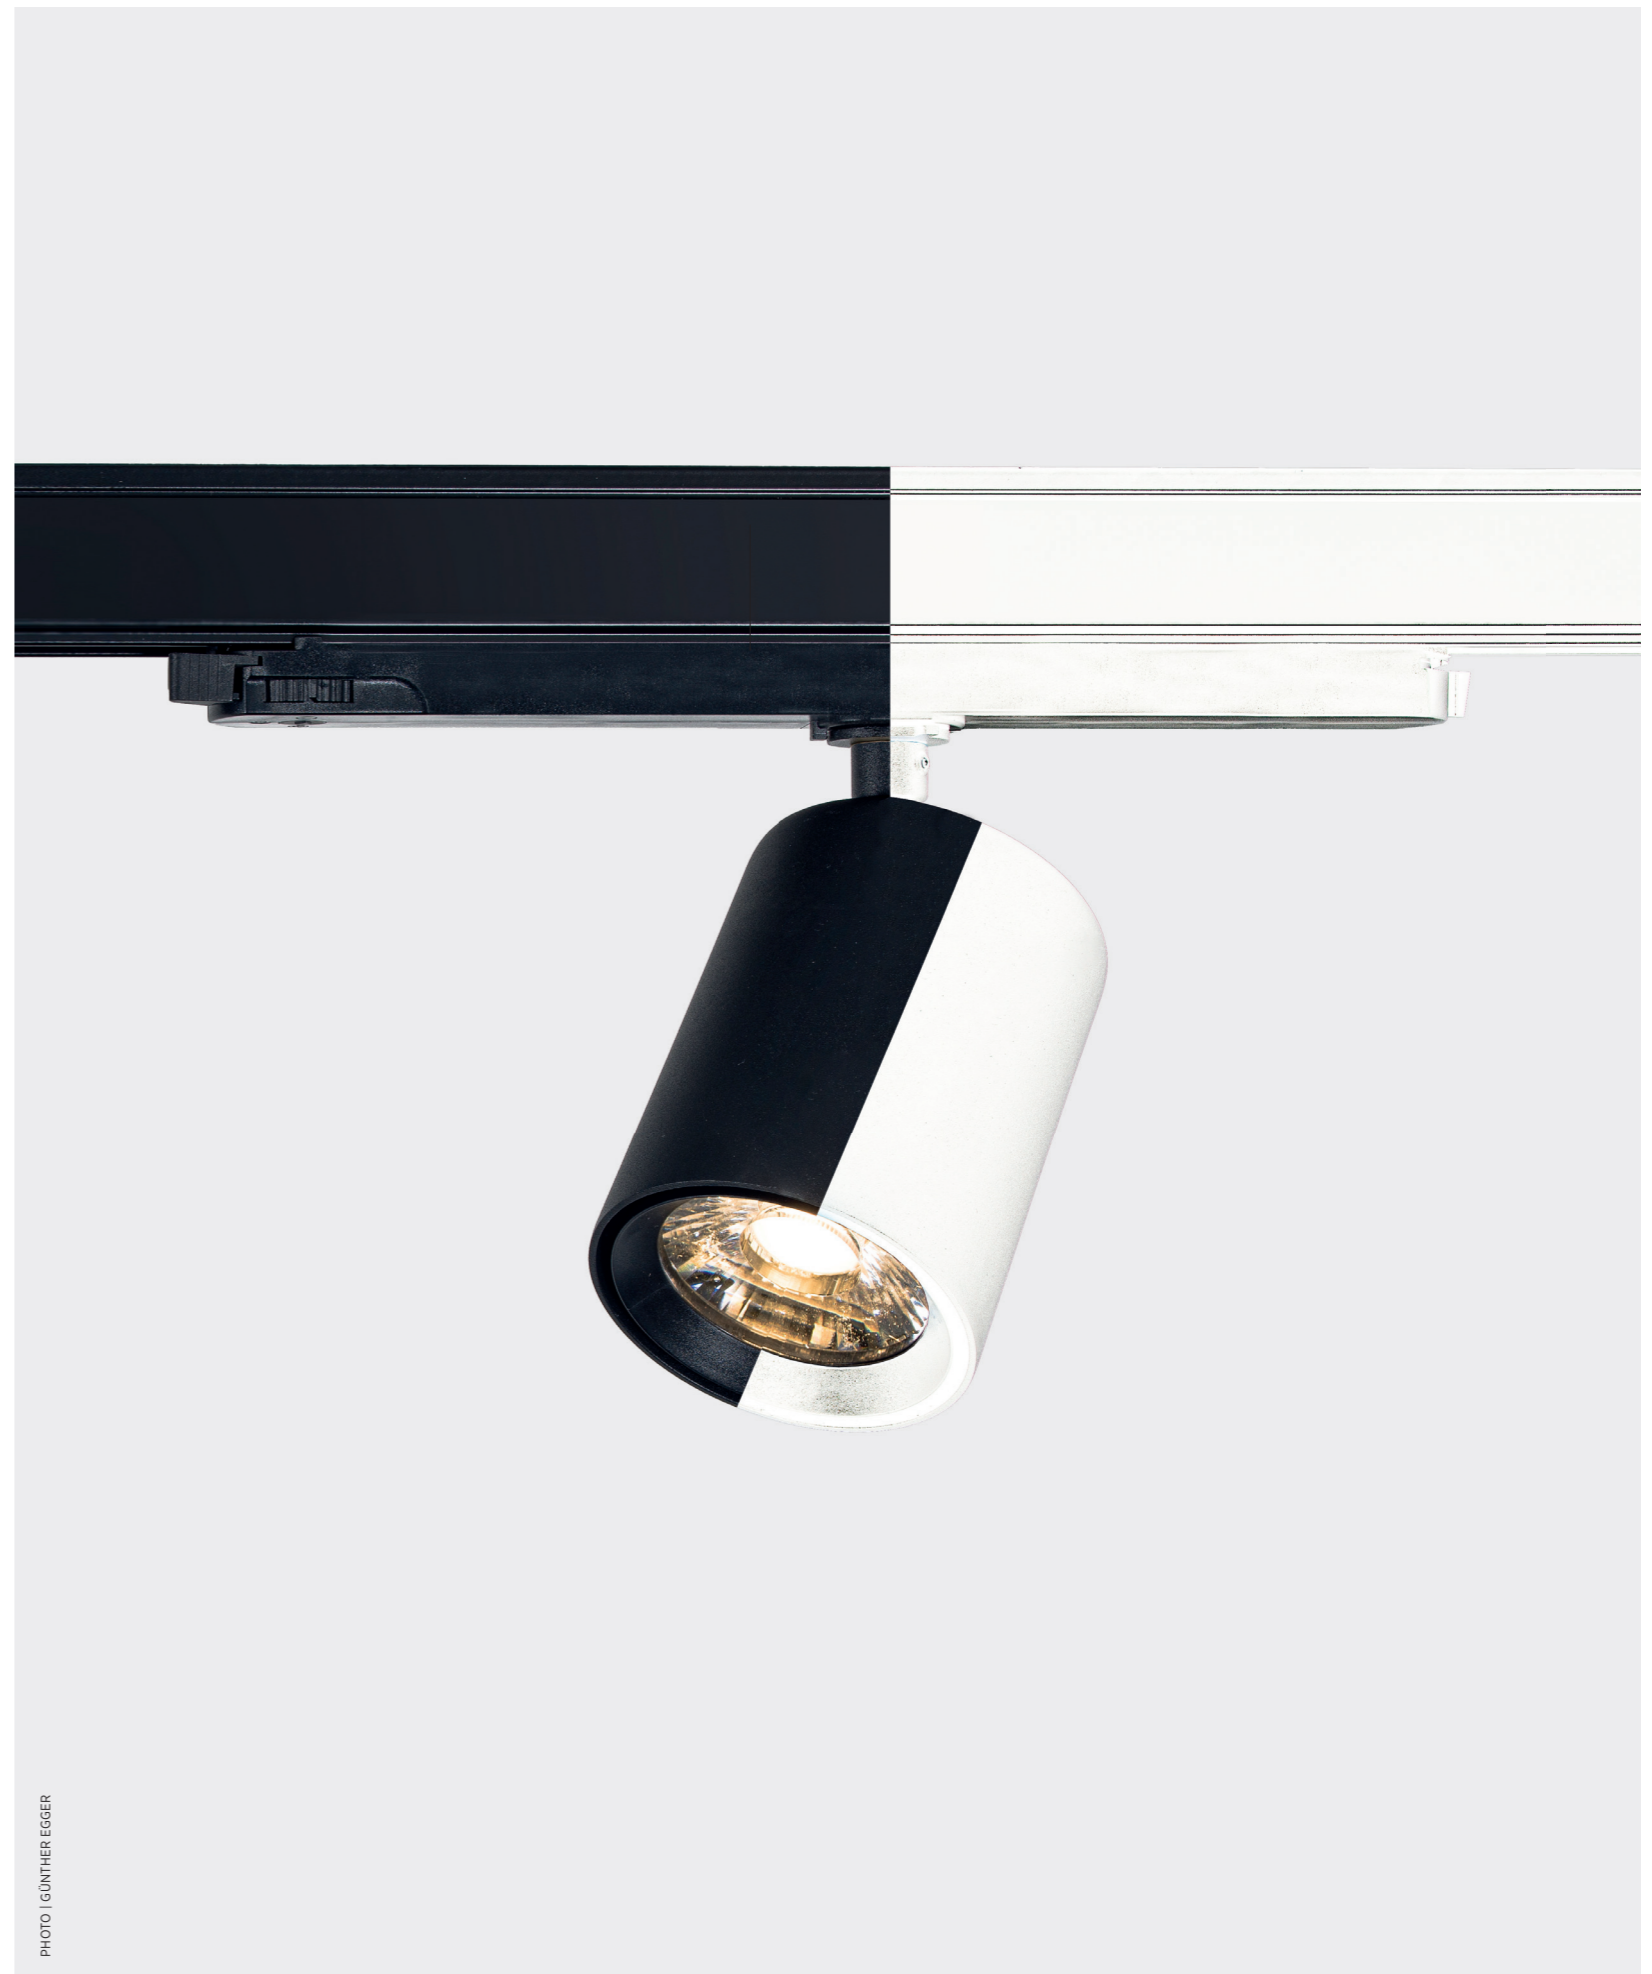


PHOTO | GÜNTHER EGGER

WWW.PROLICHT.AT


CONFIGURATION MAKES A DIFFERENCE

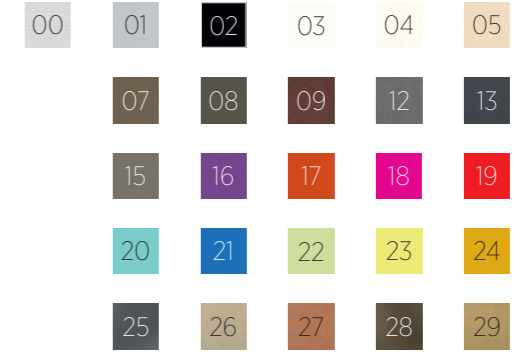

RAL Classic or any other special color on request


Luminaires play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.

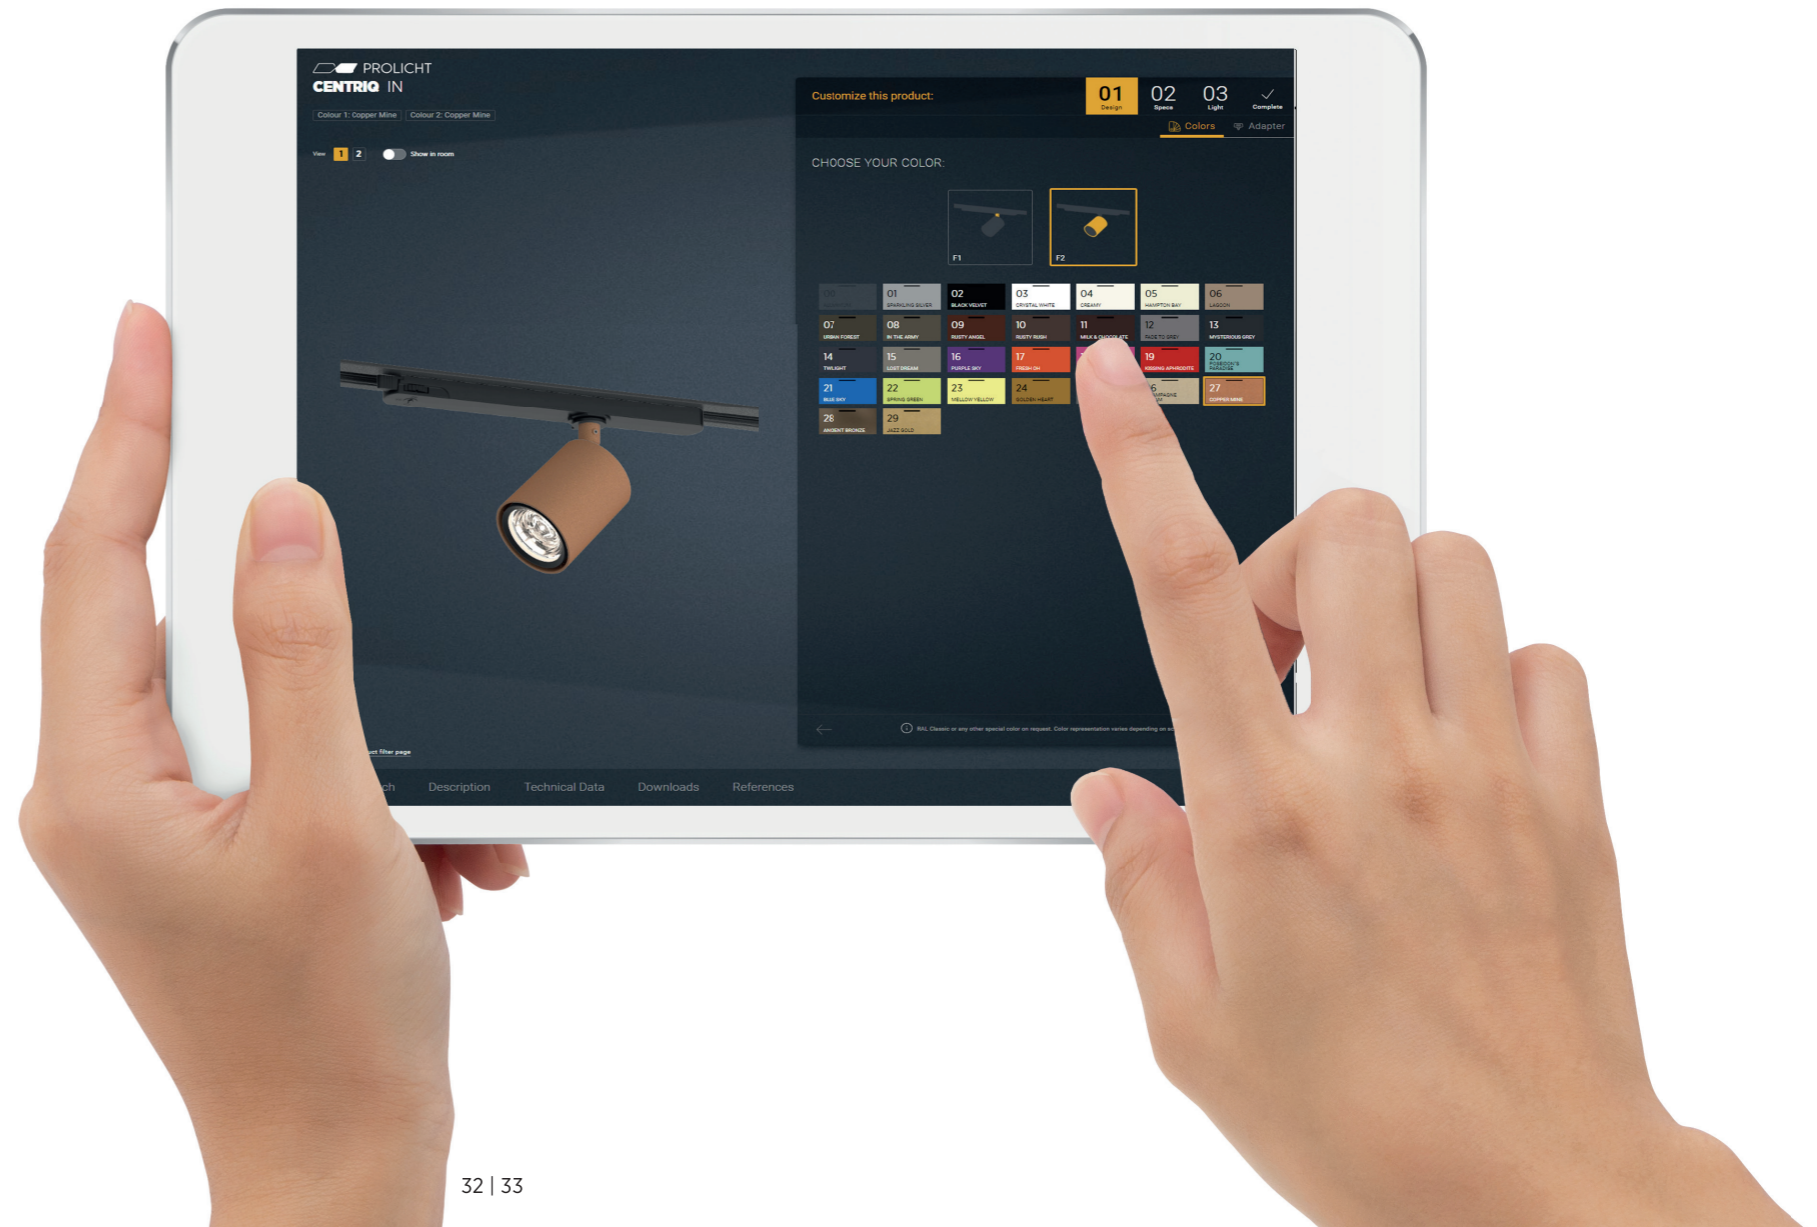

MAKE IT YOURS!

CONFIGURE ONLINE:
WWW.PROLICHT.AT/CENTRIQ

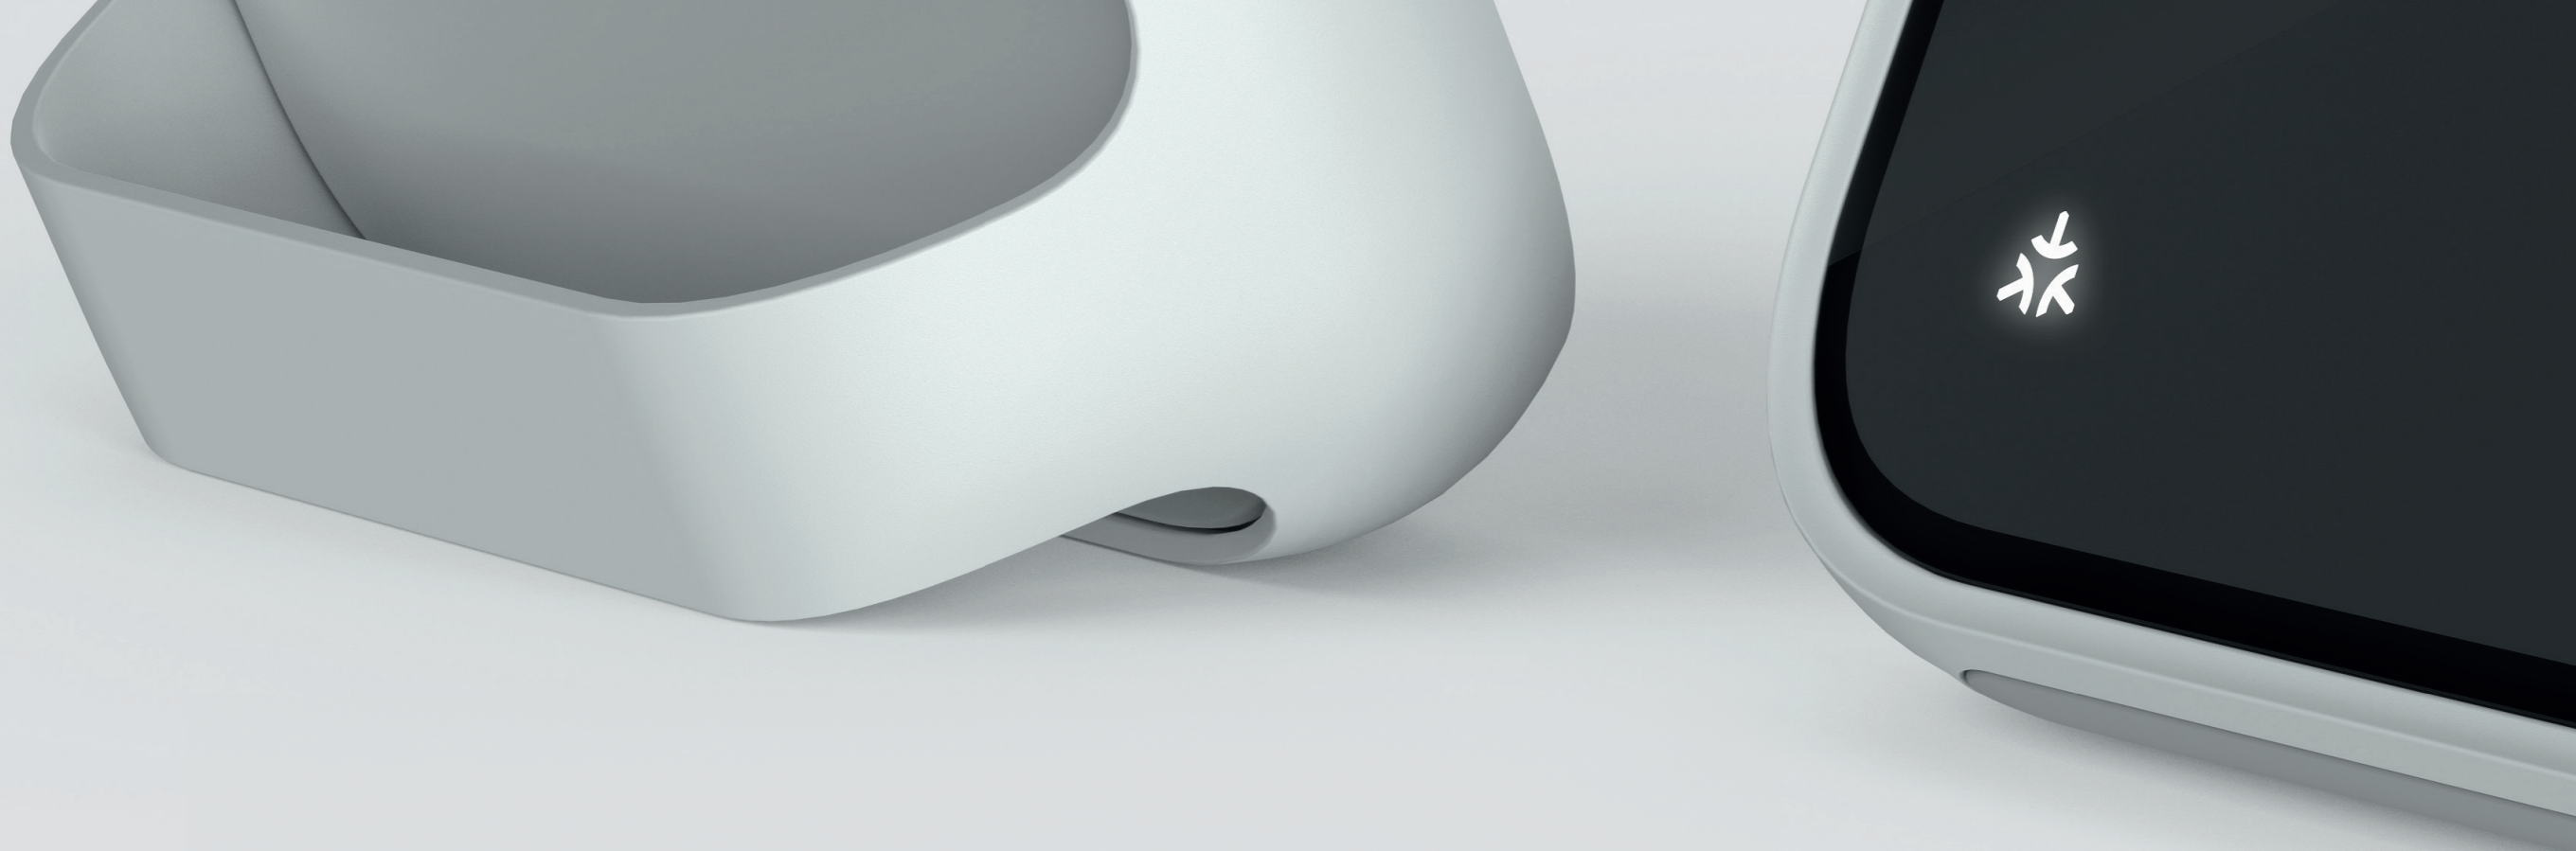

THE NEW SYMBOL OF CONNECTIVITY!

Imagine a world where all your devices seamlessly work together.
The idea is simple. The impact is powerful.

OUR PRODUCTS ARE READY!

Configure now your MATTER enabled lighting solution.
PROLICHT is offering as one of the first companies in the lighting industry, the standard matter for more than 1.000 light fittings in over 50.000 possible configurations. From now on our downlights, tracks and luminaires can be controlled together with your other devices in your smart home via just one interface.

THE FIRST SMART LIGHTING SHOWROOM IN THE WORLD




Learn about all the ways you can integrate the new standard into your project and make your lighting smart.
You want to visit us? We are looking forward to welcome you in the heart of the Alps!

All PROLICHT Matter light fittings work natively with Apple Home, Google Home, Amazon Alexa and Samsung SmartThings, and with many other home automation control systems.

THE FUTURE IS NOW!

PROLICHT WORKS WITH MATTER



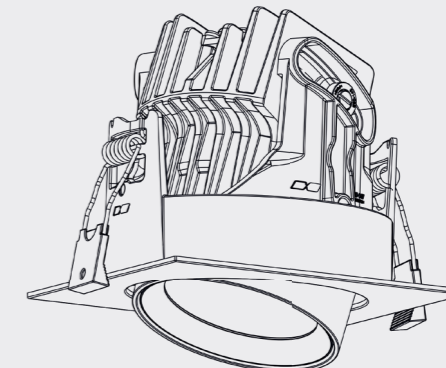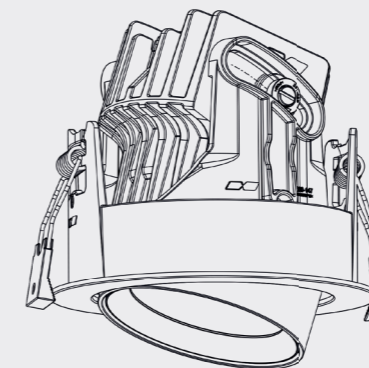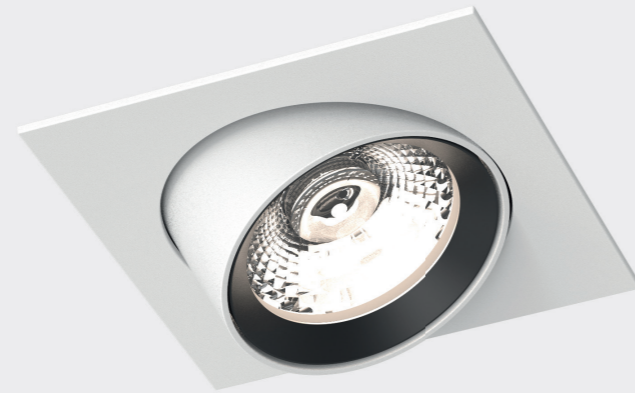

CENTRIQ ROUND

Ø 120 mm | 112 mm

CENTRIQ SQUARE

■ 120 mm | 112 mm


POWER

9 - 28 WATT

IP INTERNATIONAL PROTECTION


IP20

INSTALLATION



RECESSED

COLOR TEMPERATURE CCT

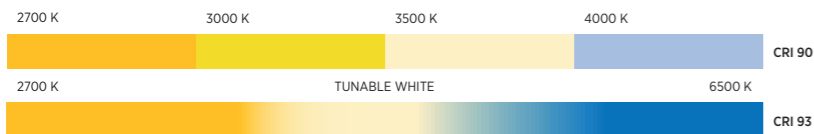

BEAMWIDTH



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

CENTRIQ ROUND

| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | INSTALLATION DEPTH MIN. mm * | ART.-N° |
|-----------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|-----|------------------------------|----------|
| | 2700 | 3000 | 3500 | 4000 | 2768 | 28 | 90 | IP20 | SPOT 20° | MEDIUM 32° | WIDE FLOOD 54° | 120 | 220-1160 | |
| SUPERSPOT | 2700 | 3000 | 3500 | 4000 | 1636 | 21 | 90 | IP20 | SUPERSPOT 10° | | | | 120 | 220-1162 |
| FLEX | 2700 | 3000 | 3500 | 4000 | 1447 | 21 | 90 | IP20 | SPOT 18° - WIDE FLOOD 46° | | | | 120 | 220-1161 |
| | TUNABLE WHITE 2700 - 6500 | | | | 2414 | 28 | 92 | IP20 | SPOT 20° | MEDIUM 32° | WIDE FLOOD 54° | 120 | 220-1165 | |
| SUPERSPOT | TUNABLE WHITE 2700 - 6500 | | | | 569 | 9 | 92 | IP20 | SUPERSPOT 10° | | | | 120 | 220-1167 |
| FLEX | TUNABLE WHITE 2700 - 6500 | | | | 479 | 9 | 93 | IP20 | SPOT 14° - WIDE FLOOD 46° | | | | 120 | 220-1166 |

CONCRETE FRAME ROUND

800-1452

CONCRETE FRAME SQUARE

800-1453

* The installation depth may vary due to the selection of the driver

CENTRIQ SQUARE


| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | INSTALLATION DEPTH MIN. mm * | ART.-N° |
|-----------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|-----|------------------------------|----------|
| | 2700 | 3000 | 3500 | 4000 | 2768 | 28 | 90 | IP20 | SPOT 20° | MEDIUM 32° | WIDE FLOOD 54° | 120 | 220-1170 | |
| SUPERSPOT | 2700 | 3000 | 3500 | 4000 | 1636 | 21 | 90 | IP20 | SUPERSPOT 10° | | | | 120 | 220-1172 |
| FLEX | 2700 | 3000 | 3500 | 4000 | 1447 | 21 | 90 | IP20 | SPOT 18° - WIDE FLOOD 46° | | | | 120 | 220-1171 |
| | TUNABLE WHITE 2700 - 6500 | | | | 2414 | 28 | 92 | IP20 | SPOT 20° | MEDIUM 32° | WIDE FLOOD 54° | 120 | 220-1175 | |
| SUPERSPOT | TUNABLE WHITE 2700 - 6500 | | | | 569 | 9 | 92 | IP20 | SUPERSPOT 10° | | | | 120 | 220-1177 |
| FLEX | TUNABLE WHITE 2700 - 6500 | | | | 479 | 9 | 93 | IP20 | SPOT 14° - WIDE FLOOD 46° | | | | 120 | 220-1176 |

* The installation depth may vary due to the selection of the driver


POSSIBLE CONTROLS

ON/OFF CASAMBI PUSH DIM 1-10V






CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX


Ø 65 x 80 mm



CENTRIQ IN 83



CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX

Ø 83 x 105 mm


POWER

9 - 37 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

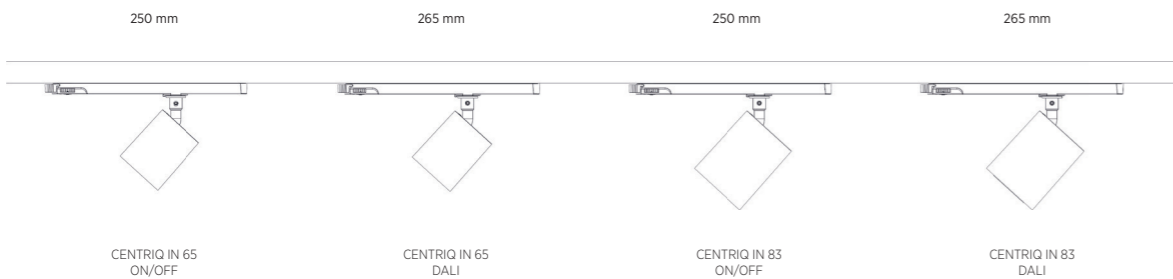

COLOR TEMPERATURE CCT

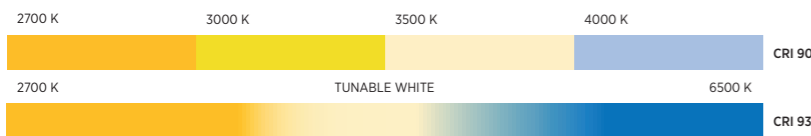

BEAMWIDTH



COLOR ADAPTER



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

CENTRIQ IN 65 | 3 PHASE TRACK

| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | ART.-N° ON/OFF | ART.-N° DALI |
|--------------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|---|----------------|--------------|
| | 2700 | 3000 | 3500 | 4000 | 2291 | 23 | 90 | IP20 | SPOT 24° | FLOOD 36° | WIDE FLOOD 52° | | 330-1380 | 330-1382 |
| SUPERSPOT | 2700 | 3000 | 3500 | 4000 | 1554 | 21 | 90 | IP20 | SUPERSPOT 12° | | | | 330-1400 | 330-1402 |
| FLEX | 2700 | 3000 | 3500 | 4000 | 1421 | 21 | 90 | IP20 | SPOT 14° - WIDE FLOOD 44° | | | | 330-1390 | 330-1392 |
| | TUNABLE WHITE 2700 - 6500 | | | | 1269 | 15 | 92 | IP20 | SPOT 18° | MEDIUM 34° | WIDE FLOOD 54° | • | 330-1522 | |
| SUPERSPOT TW | TUNABLE WHITE 2700 - 6500 | | | | 564w | 9 | 92 | IP20 | SUPERSPOT 12° | | | | • | 330-1512 |

CENTRIQ IN 85 | 3 PHASE TRACK

| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | ART.-N° ON/OFF | ART.-N° DALI |
|--------------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|---|----------------|--------------|
| | 2700 | 3000 | 3500 | 4000 | 3450 | 37 | 90 | IP20 | SPOT 20° | MEDIUM 32° | WIDE FLOOD 54° | | 330-1450 | 330-1452 |
| SUPERSPOT | 2700 | 3000 | 3500 | 4000 | 1839 | 27 | 90 | IP20 | SUPERSPOT 12° | | | | 330-1470 | 330-1472 |
| FELX | 2700 | 3000 | 3500 | 4000 | 1421 | 21 | 90 | IP20 | SPOT 14° - WIDE FLOOD 44° | | | | 330-1460 | 330-1462 |
| | TUNABLE WHITE 2700 - 6500 | | | | 2907 | 36 | 93 | IP20 | SPOT 24° | MEDIUM 34° | WIDE FLOOD 54° | • | 330-1152 | |
| SUPERSPOT TW | TUNABLE WHITE 2700 - 6500 | | | | 569 | 9 | 92 | IP20 | SUPERSPOT 10° | | | | • | 330-1542 |
| FLEX TW | TUNABLE WHITE 2700 - 6500 | | | | 479 | 9 | 92 | IP20 | SPOT 14° - WIDE FLOOD 46° | | | | • | 330-1532 |
| HIGH OUTPUT | 2700 | 3000 | 3500 | 4000 | 4312 | 41 | 90 | IP20 | SPOT 24° | FLOOD 36° | WIDE FLOOD 54° | | 330-1610 | 330-1612 |


POSSIBLE CONTROLS






0-350°


0-90°



CENTRIQ IN 65




CENTRIQ IN 65 | SUPERSPOT




CENTRIQ IN 65 | FLEX


Ø 65 x 80 mm



CENTRIQ IN 83



CENTRIQ IN 83 | SUPERSPOT



CENTRIQ IN 83 | FLEX

Ø 83 x 105 mm



POWER

9 - 37 WATT


IP INTERNATIONAL PROTECTION

IP20

INSTALLATION

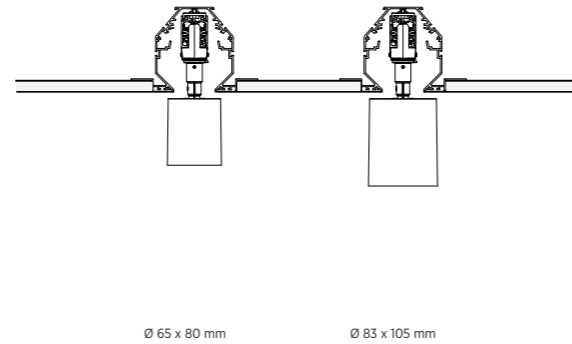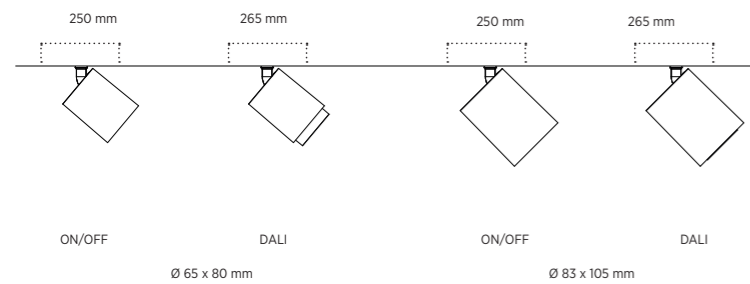

COLOR TEMPERATURE CCT

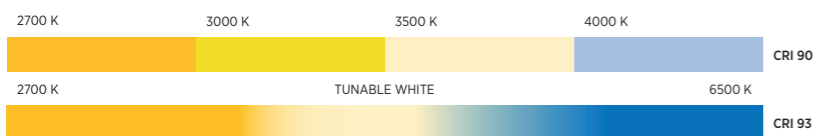

BEAMWIDTH



COLOR ADAPTER



LENS PACK



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

CENTRIQ IN 65 | 2LOOK4 50

| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | ART.-N° ON/OFF | ART.-N° DALI |
|--------------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|---|----------------|--------------|
| | 2700 | 3000 | 3500 | 4000 | 2291 | 23 | 90 | IP20 | SPOT 24° | FLOOD 36° | WIDE FLOOD 52° | | 7-02388-00 | 7-02389-02 |
| SUPERSPOT | 2700 | 3000 | 3500 | 4000 | 1554 | 21 | 90 | IP20 | SUPERSPOT 12° | | | | 7-02392-00 | 7-02393-02 |
| FLEX | 2700 | 3000 | 3500 | 4000 | 1421 | 21 | 90 | IP20 | SPOT 14° - WIDE FLOOD 44° | | | | 7-02390-00 | 7-02391-02 |
| | TUNABLE WHITE 2700 - 6500 | | | | 1269 | 15 | 92 | IP20 | SPOT 18° | MEDIUM 34° | WIDE FLOOD 54° | • | 7-02750-02 | |
| SUPERSPOT TW | TUNABLE WHITE 2700 - 6500 | | | | 564 | 9 | 92 | IP20 | SUPERSPOT 12° | | | | • | 7-02751-02 |

CENTRIQ IN 85 | 2LOOK4 50

| VERSION | CCT / K | | | | LUMEN MAX. | WATT | CRI | IP | BEAM ANGLE | | | | ART.-N° ON/OFF | ART.-N° DALI |
|-------------|---------------------------|------|------|------|------------|------|-----|------|---------------------------|------------|----------------|---|----------------|--------------|
| FLEX | 2700 | 3000 | 3500 | 4000 | 1421 | 21 | 90 | IP20 | SPOT 14° - WIDE FLOOD 44° | | | | 7-02396-00 | 7-02397-02 |
| | TUNABLE WHITE 2700 - 6500 | | | | 2907 | 36 | 93 | IP20 | SPOT 24° | MEDIUM 34° | WIDE FLOOD 54° | • | 7-02752-02 | |
| SUPERSPOT | TUNABLE WHITE 2700 - 6500 | | | | 569 | 9 | 92 | IP20 | SUPERSPOT 10° | | | | • | 7-02754-02 |
| FLEX | TUNABLE WHITE 2700 - 6500 | | | | 479 | 9 | 92 | IP20 | SPOT 14° - WIDE FLOOD 46° | | | | • | 7-02753-02 |
| HIGH OUTPUT | 2700 | 3000 | 3500 | 4000 | 4312 | 41 | 90 | IP20 | SPOT 24° | FLOOD 36° | WIDE FLOOD 54° | | 7-02765-00 | 7-02765-02 |

POSSIBLE CONTROLS



DISCOVER MORE ON
WWW.PROLICHT.AT/CENTRIQ





EDITOR Filippo Bettinzoli, PROLICHT
PROLICHT GmbH | Austria
6091 Neu-Götzens | Gewerbepark 9
T +43 5234 33 499 | F + 43 5234 33 499 22
marketing@prolicht.at | www.prolicht.at

TECHNICAL SUPPORT Romain Hoffmann

GRAPHIC DESIGN Tonia Wiedenmann

TEXT Julia Kopp

PRODUCT PHOTOS Armin Kuprian

PRODUCT RENDERINGS Aurel Petic | BRANDSHOOT | RMN VISUAL STUDIO

EDITION August 2023



FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT