

MINIMAL TRACK
PLAYFUL MINIMALISM

MINIMAL TRACK CATALOGUE 2022

ENGLISH

All technical information and values (e.g. lumen, output, beam angle or dimensions) correspond to the printing date or the creation date of this document and will not necessarily be updated. All changes and adaptations that serve to improve our products can be carried out without prior notice.

The latest data sheets can be configured at www.prolicht.at

PROLICHT MAKES A DIFFERENCE



Wenn Sie Ihren anspruchsvollen Kunden maßgeschneiderte High-Tech-Qualitätsprodukte versprechen, können Sie diese nicht irgendwo herstellen lassen. Wir fertigen unsere Produkte dort, wo die bestausgebildeten Techniker, Ingenieure und Designer zu Hause sind: mitten in den Tiroler Alpen.

Schließlich ist es ihr Können, das den Unterschied macht. Und es ist ihre Kompetenz, die PROLICHT zu einem der weltweit erfolgreichsten Premiumhersteller für architektonische Lichtkonzepte gemacht hat. Nachhaltig produziert und maßgeschneidert in der Mitte Europas, im Herzen der Tiroler Alpen.



VERSATILE AND ALMOST INVISIBLE


The innovative MINIMAL TRACK lighting system combines pure minimalism with the latest technology. Its ultra compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design.






VISUALLY TRIMLESS

The MINIMAL TRACK with a height of only 9,5mm can be discreetly inserted into the architecture and at the same time convinces with all the advantages of a surface-mounted installation.

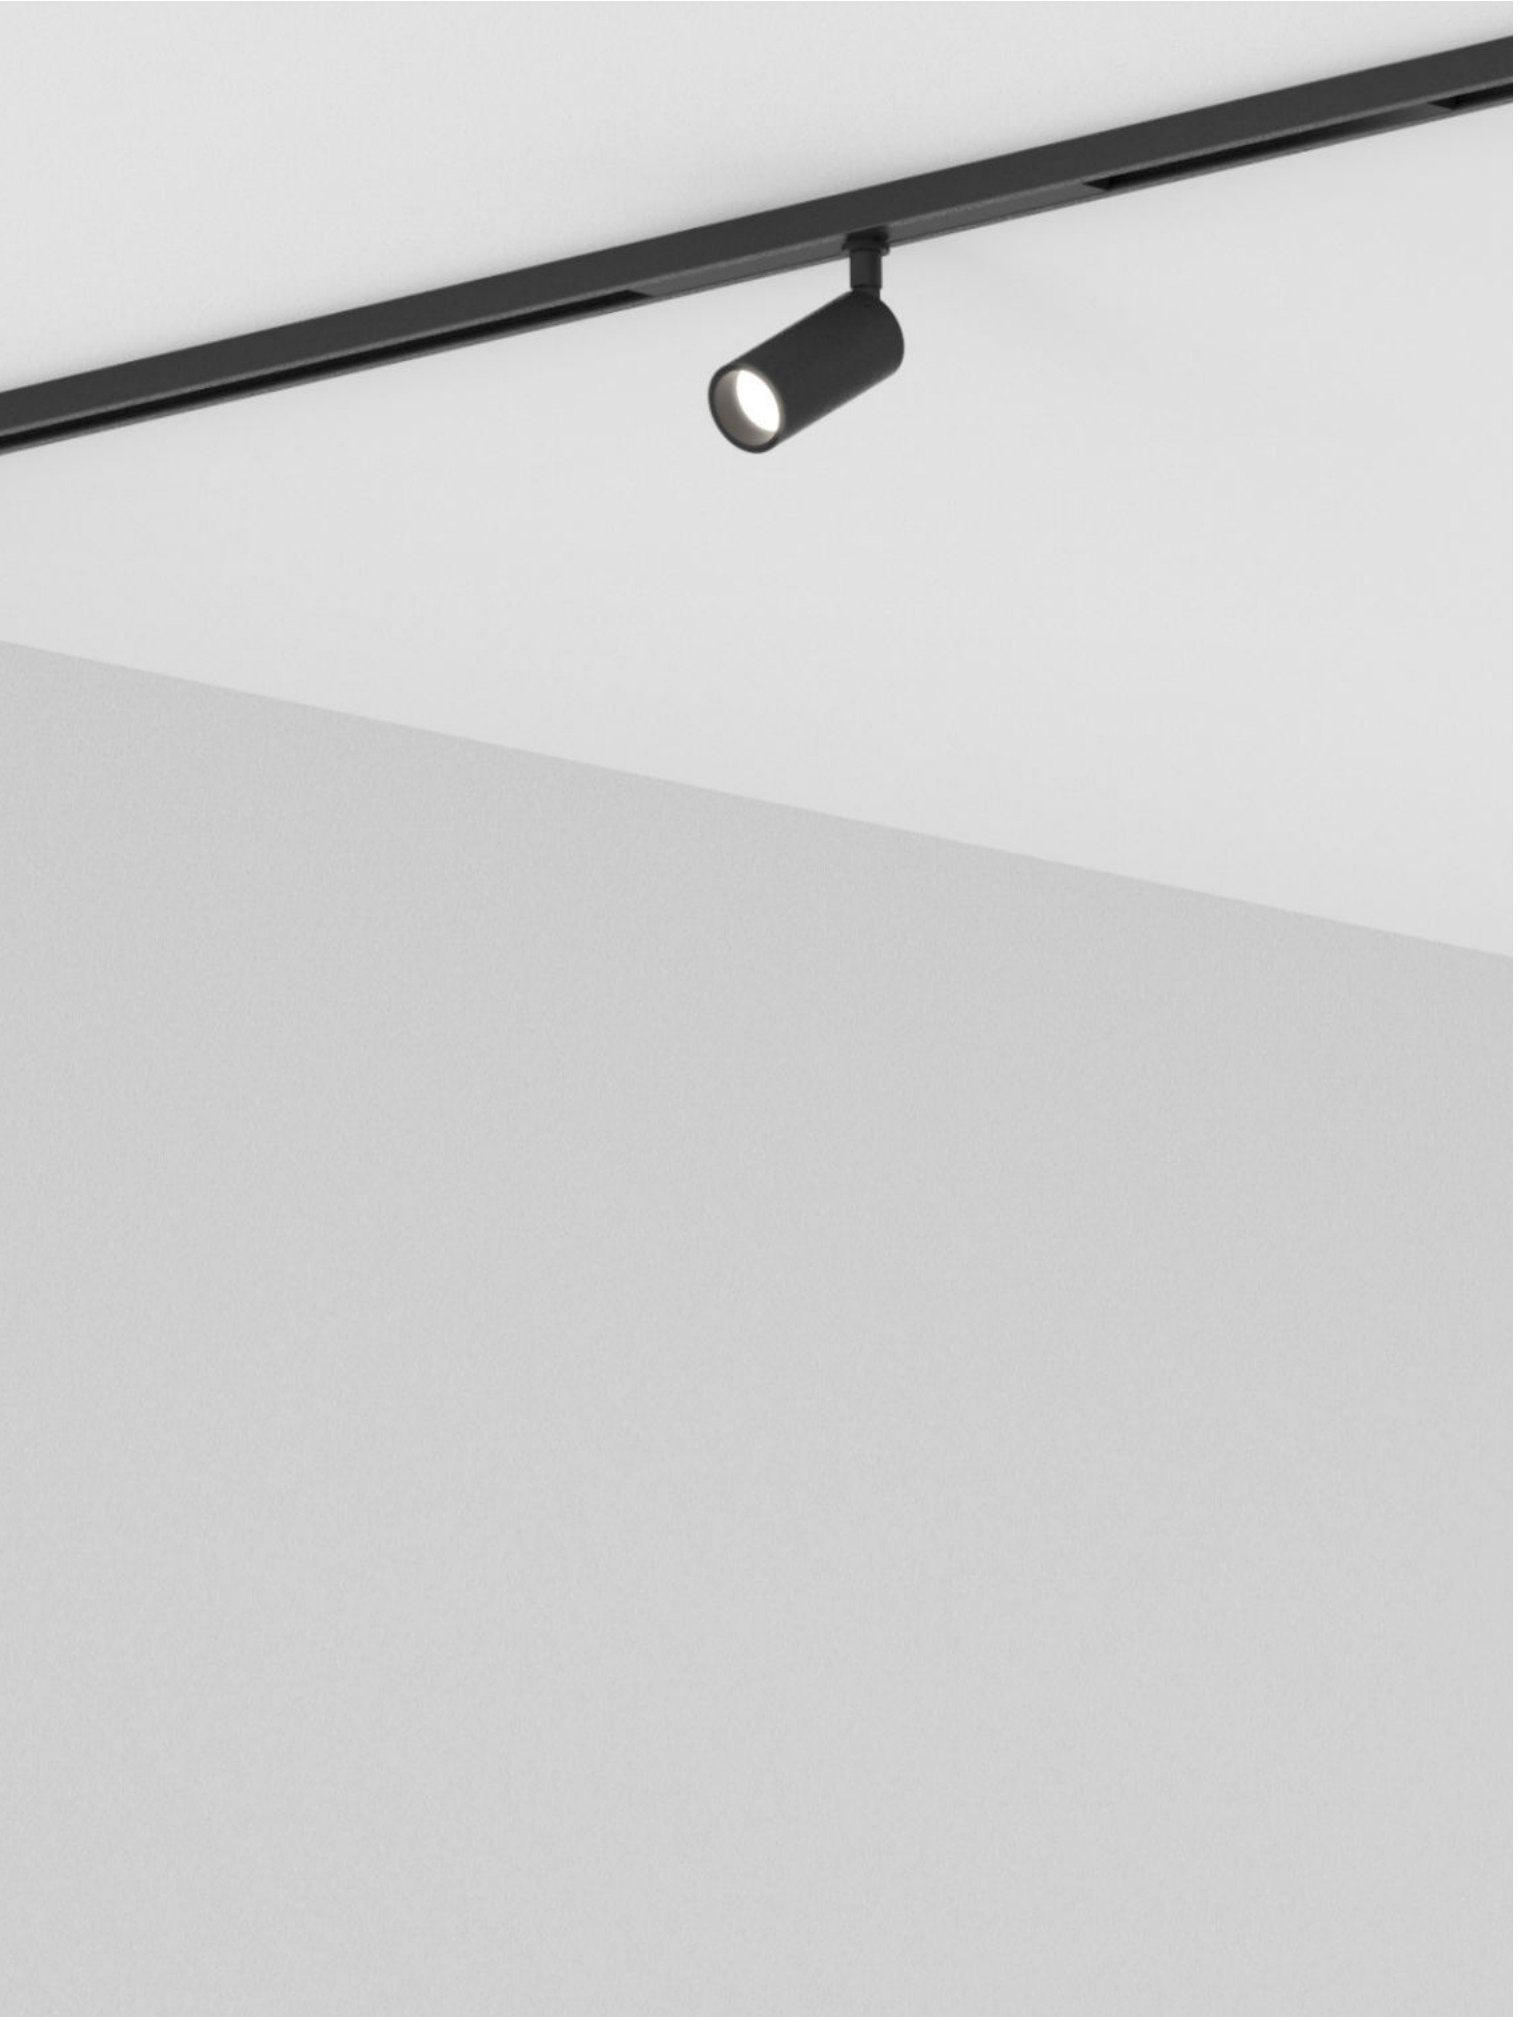





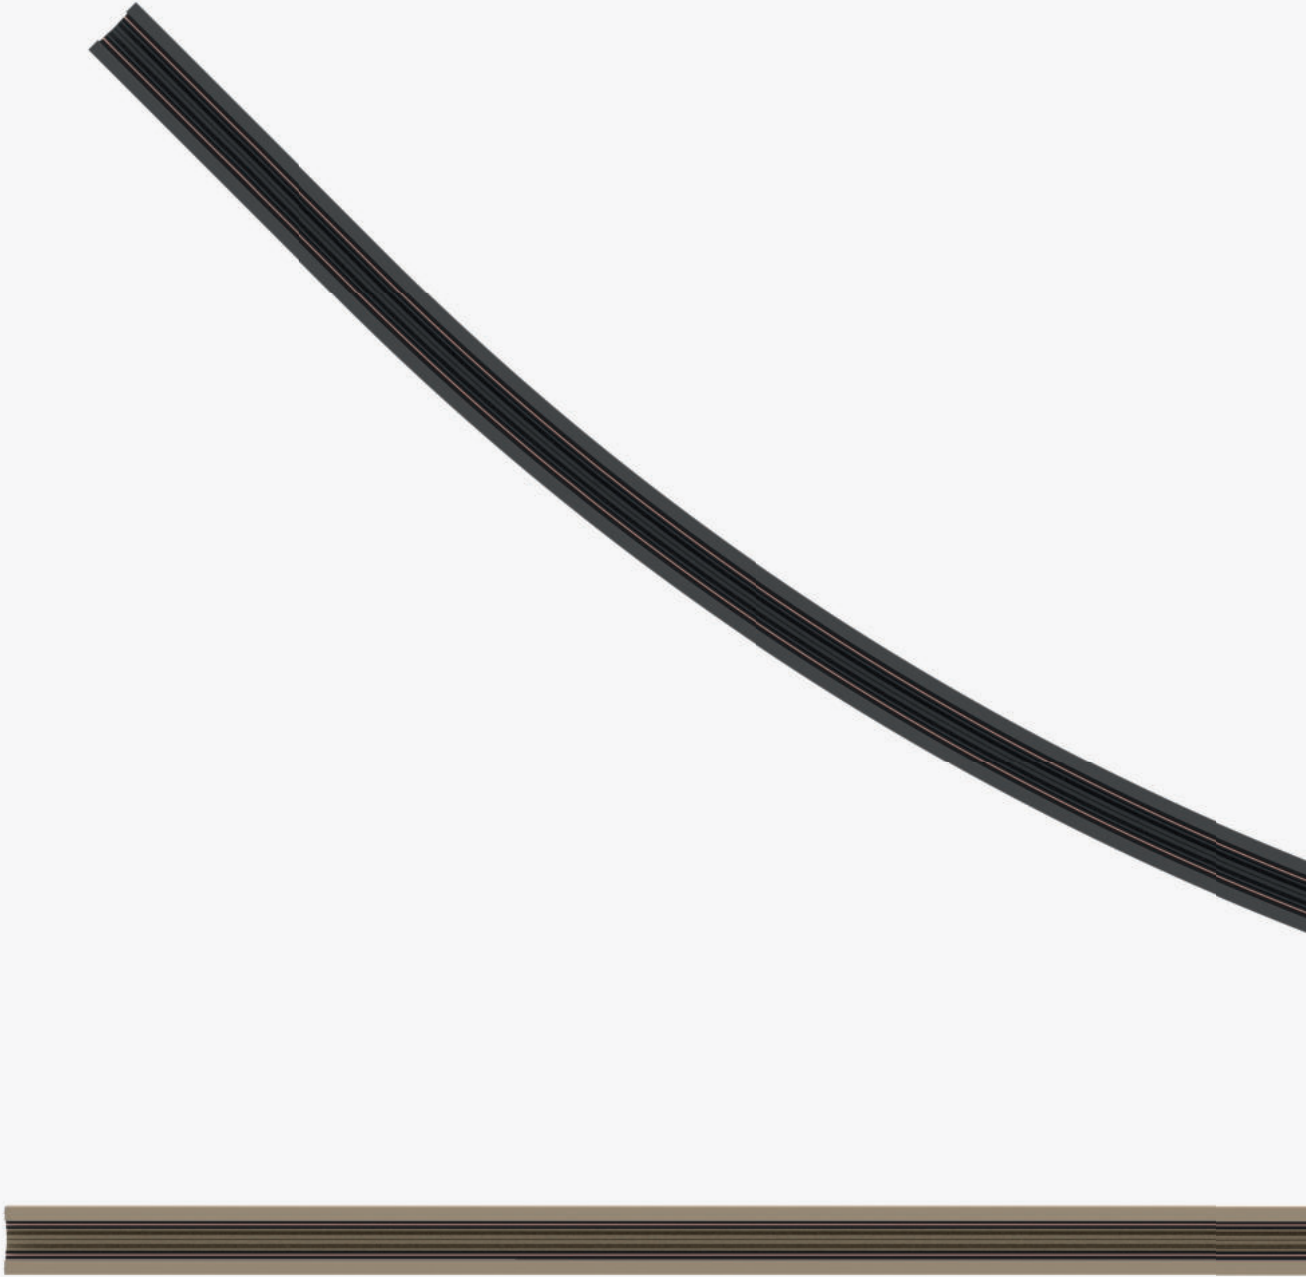


MINIMAL TRACK

MINIMAL ESSENCE

Minimalistic design, minimal installation effort, tailor-made result in the most simple way.

The MINIMAL TRACK allows you to simply design any line you want – available with 90° integrated connectors for elbows on the same surface or to jump ceiling to wall or T- and X-connectors with two different aesthetics to match various tastes in interior design. The track can be easily cut on site to perfectly fulfill any project requirements.



TRACK

3000 mm

2000 mm

1000 mm




COLOR MAKES A DIFFERENCE

Unique colors and finishes, with infinite combinations, enable a holistic interior design concept to be completed or certain highlights to be created with our 25 PROLICHT colors. RAL Classic or any other special color is available on request.




EASY INTEGRATION

TRACK MOUNTING

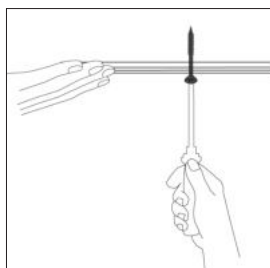


The track is conceived to be easily cut on site, and directly screwed to the ceiling for a tailor-made result in each installation.
Article-Number for a set of 50 pieces of mounting screws: 800-1427

CROSSINGS




Complex connection pieces belong to the past with MINIMAL TRACK. The linear elements can be used to create crossings in the easiest way. Even after the installation, adaptations can be made with minimal effort.

ELECTRICAL CONNECTION




Every T-Connector is enclosed with one, every X connector with two flexible cross adapters. An electrical connection of the pieces can be established with these components with ease.

COVERING THE CROSSINGS




Whether as a colorful accent in the PROLICHT colors or synchronized with the color of the track, the covers are placed as a final step.

INSERTS



Place and remove any insert wherever you want by simply pulling it out and snapping it in without any tools needed.

TRACKMASK



A black flexible rubber cover, easy to cut directly on site after positioning the inserts and integrated inside the track, is the final touch to furtherly minimize the appearance of the MINIMAL TRACK.





STRAIGHT LINES

- A** LINEAR CONNECTOR
BLACK ■
ART.-N°: 350-1868

WHITE □
ART.-N°: 350-2272
- B** FLAT CORNER CONNECTOR
BLACK ■
ART.-N°: 350-1869

WHITE □
ART.-N°: 350-2276
- C** DIHEDRAL CONNECTOR
BLACK ■
ART.-N°: 350-1870

WHITE □
ART.-N°: 350-2277
- D** 90° DUMMY TRACK
QUICK INSTALLATION
BLACK ■
ART.-N°: 350-1877


WHITE □
ART.-N°: 350-2274
- E** 90° DIHEDRAL DUMMY TRACK
QUICK INSTALLATION
BLACK ■
ART.-N°: 350-1870

WHITE □
ART.-N°: 350-2275
- F** ENDCAP TRACK
BLACK ■
ART.-N°: 350-1870

WHITE □
ART.-N°: 350-2277
- G** X-CONNECTOR
COLOR 02 CRYSTAL WHITE
ART.-N°: 350-2283

ADAPTER BLACK ■
ADAPTER WHITE □
- H** T-CONNECTOR
COLOR 02 CRYSTAL WHITE
ART.-N°: 350-2284

ADAPTER BLACK ■
ADAPTER WHITE □

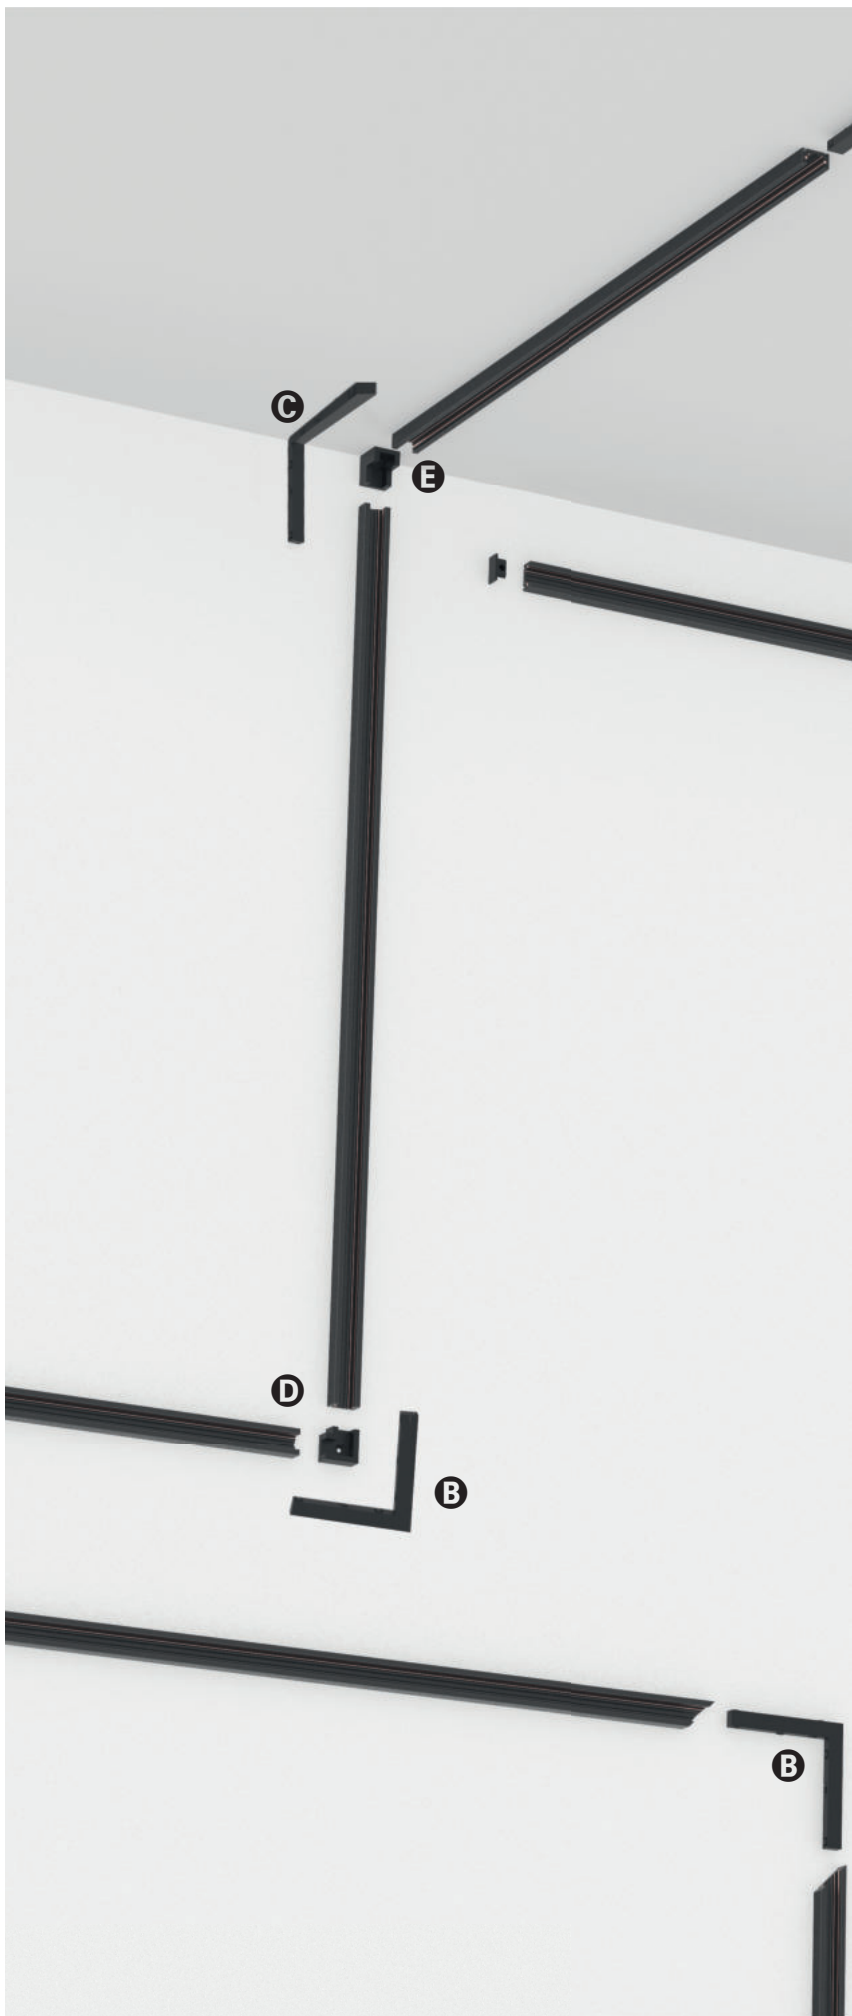



-  01 02 03 04 05 07 08 09 12 13 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29

RAL Classic or any other special color on request



INSPIRATION | VIEWTURE MEDIA

IMAGINE MICRO | COLOR 02 BLACK VELVET | MICRO LINE




D QUICK CONNECTOR

To guarantee a quick and easy installation, we offer additional track components. This black connector is especially suited to facilitate the installation of the MINIMAL TRACK.

B MITER JOINT

The track is designed to be easily cut on site and for a seamless installation of corner elements it is possible to cut the extremities of straight elements at an angle of 45° for a miter-joint connection. If other angles are needed - for a sloping roof for example - the joint can be individualized with a flexible connector.

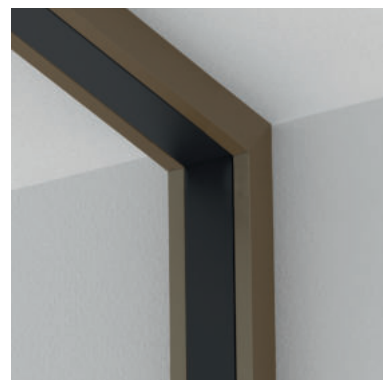

D QUICK CONNECTOR WALL TO CEILING

B MITER JOINT WALL TO CEILING

YOUR PERFECT CURVE!

The MINIMAL TRACK offers many solutions to compose curved profiles, with 45°, 90° and 180° curved connectors. Individualized solutions can be evaluated on request.

All of the curved elements are available in the 25 PROLICHT colors.


A CURVED CONNECTOR Ø 400 MM / 90°

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-1892




B CURVED CONNECTOR Ø 800 MM / 45°

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-1893




C CURVED TRACK Ø 1600 MM / 45°

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-1894





D CURVED Ø 1600 MM / 90°


AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-1895



E CURVED TRACK Ø 1600 MM / 180°

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-1904

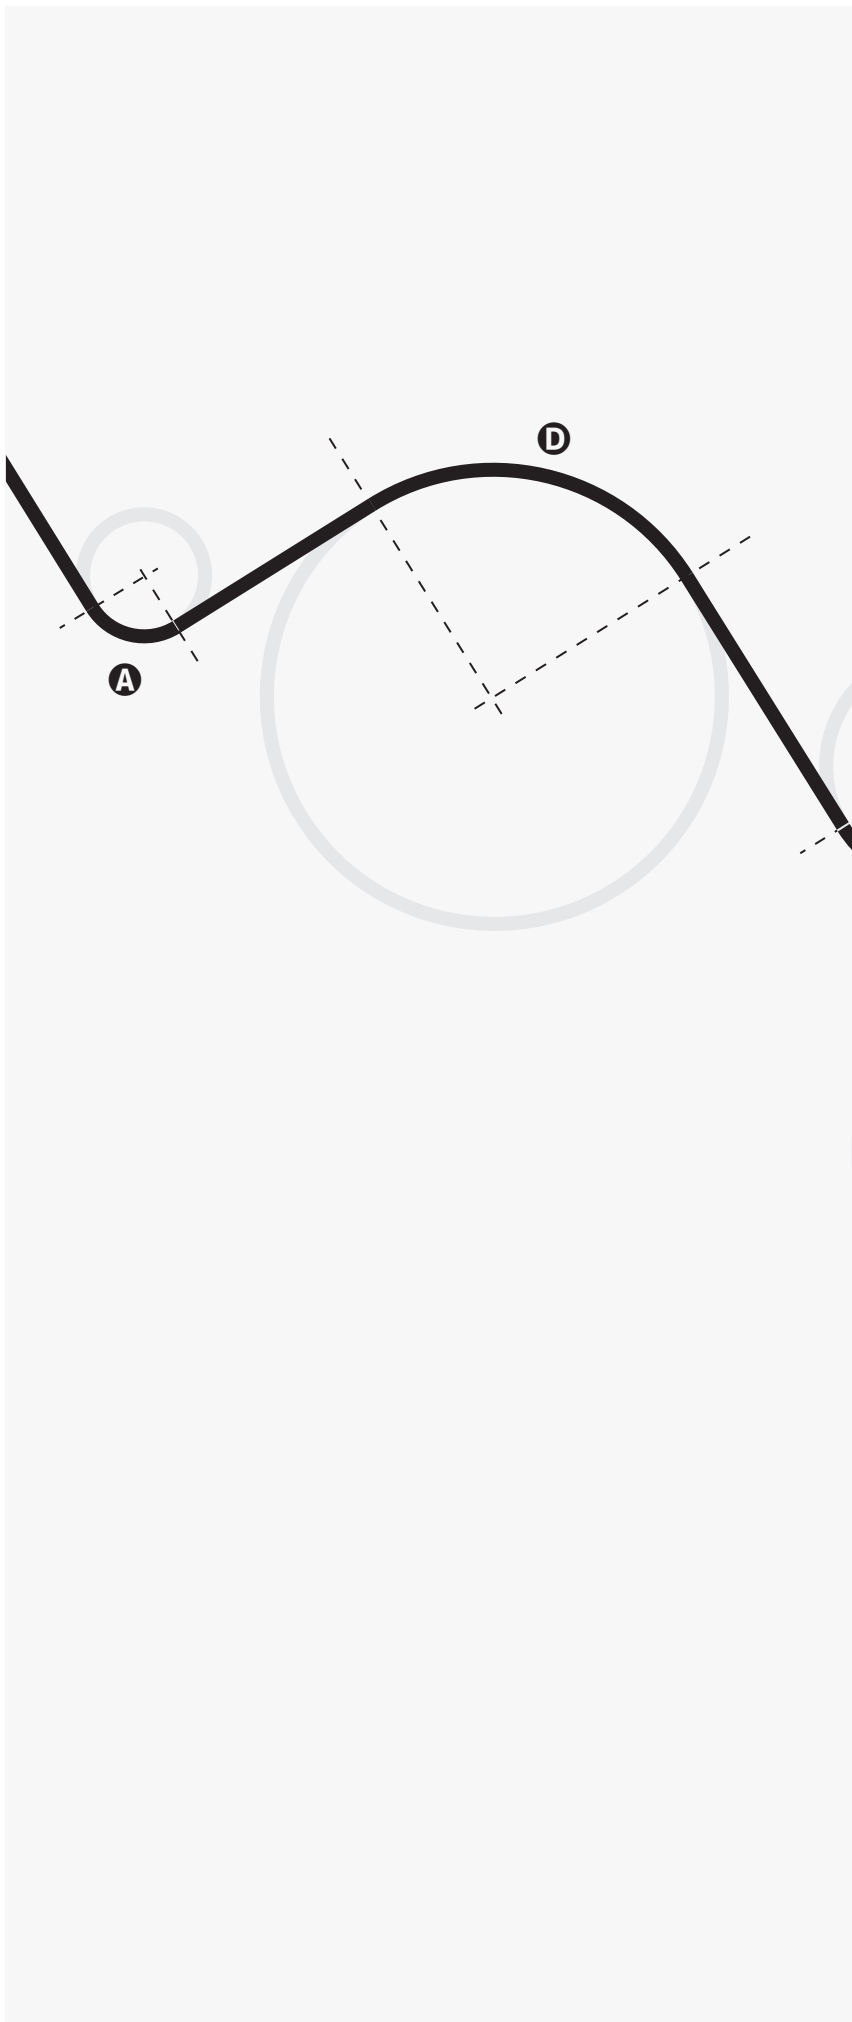

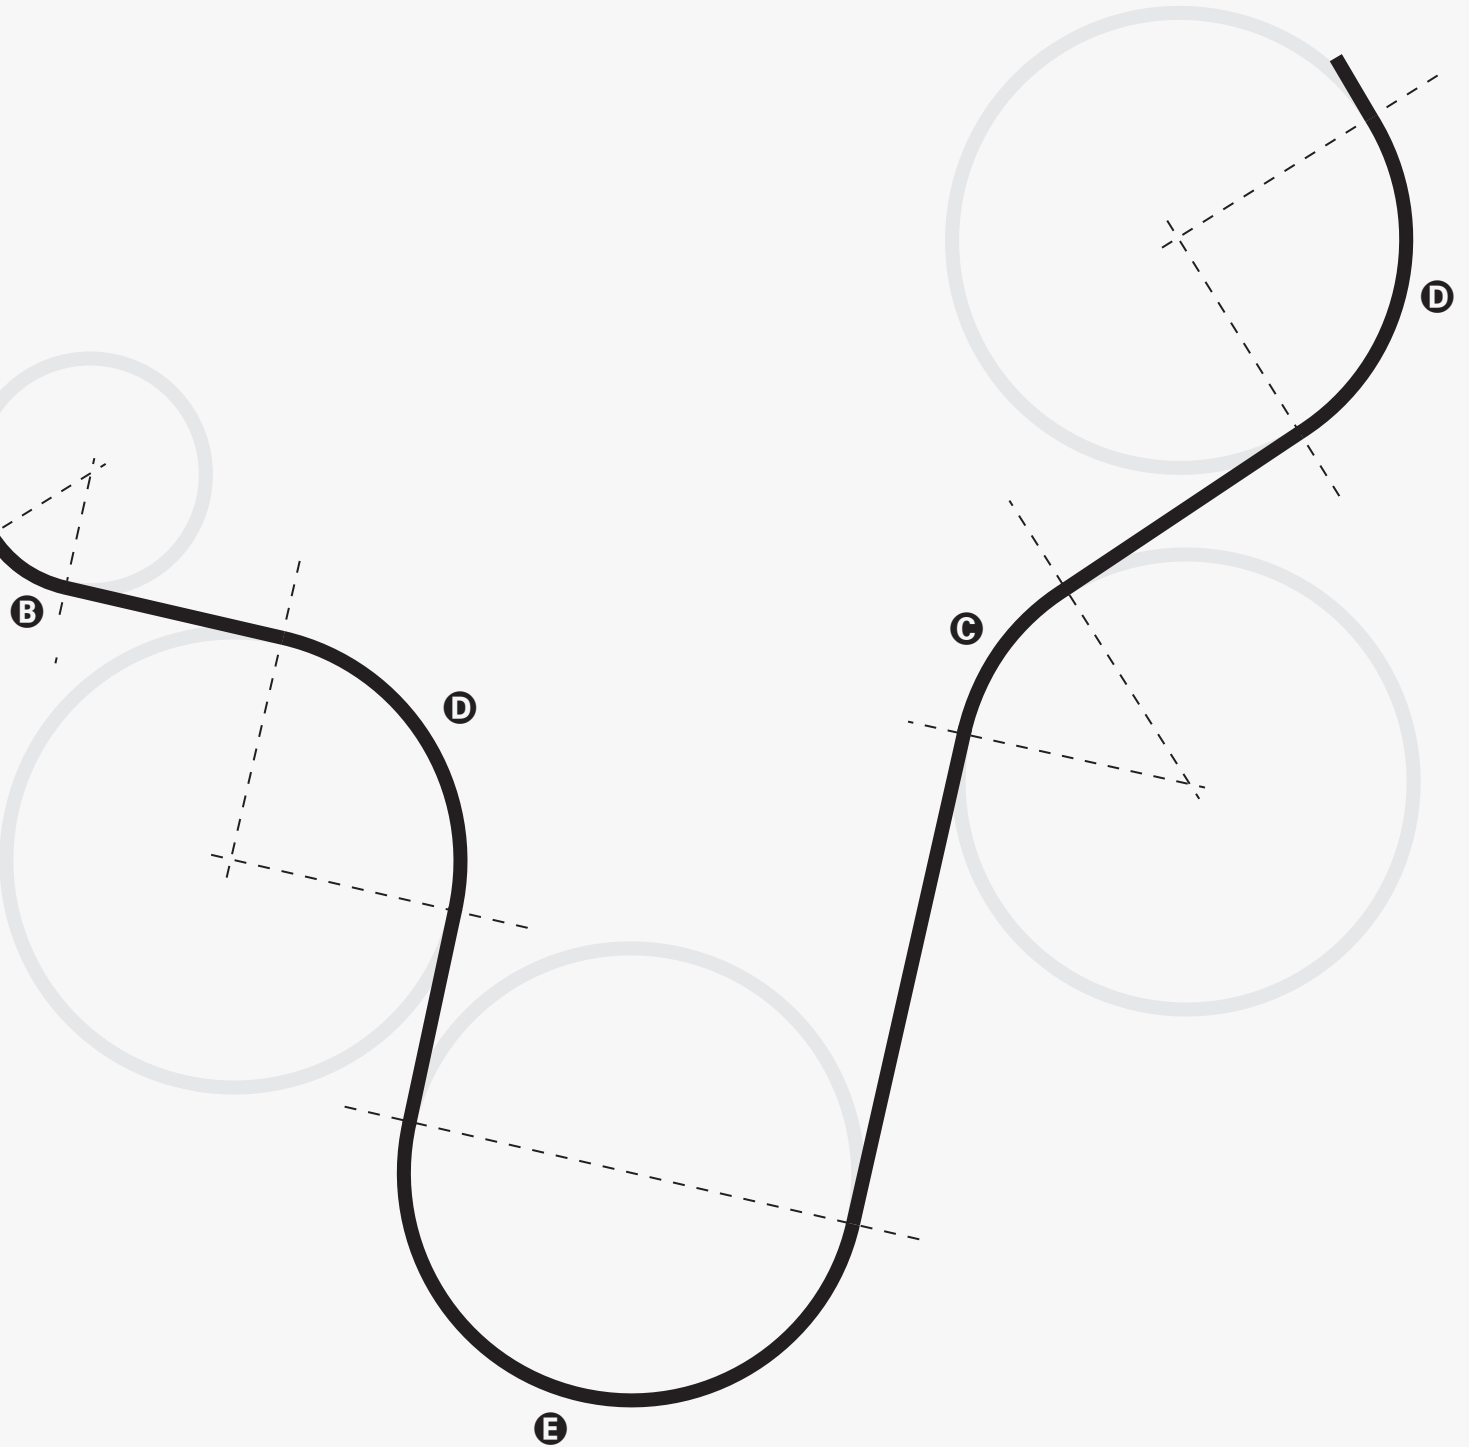

RAL Classic or any other special color on request








PHOTO | ARMIN KUPRIAN

INSERT: SNOOKER SHINE - 02 BLACK VELVET | SHINE RING WHITE

INSERTS



PHOTO: GÜNTHER EGGER

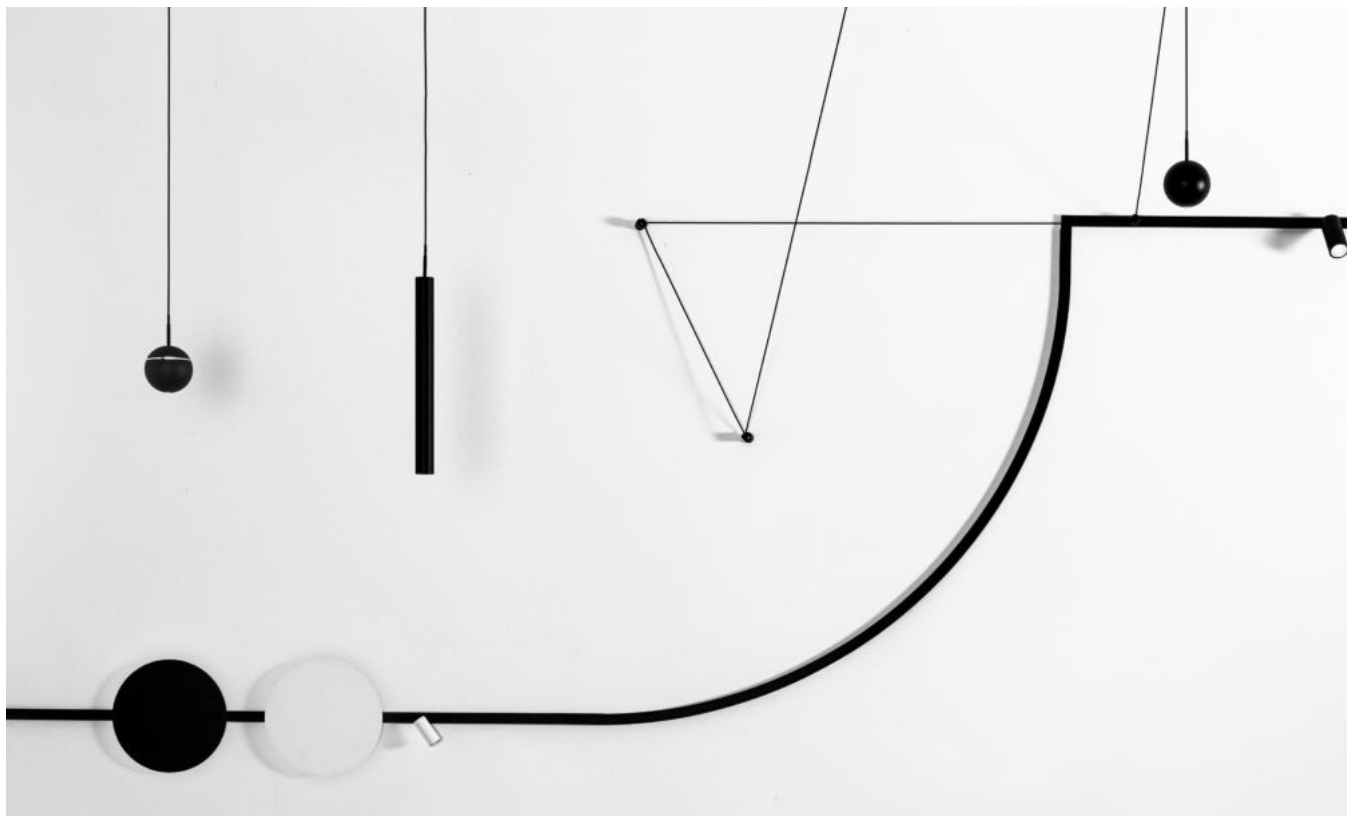

MINIMAL TRACK offers a wide variety of inserts - the selection ranges from pendant luminaires over indirectly illuminated DISQs to decorative elements. The system guarantees exceptional flexibility to adapt the lighting concept to any room situation.



Optional components and colored accessories allow unlimited scope for individualized design concepts. This lighting system is not only suitable for creating the perfect lighting atmosphere, but also adds individuality and exceptionality to any space.

INSERTS OVERVIEW

A

IMAGINE MICRO 20

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02825-02



ADAPTER BLACK 
ADAPTER WHITE 



B

IMAGINE MICRO 35

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02845-02

ADAPTER BLACK 
ADAPTER WHITE 



C

MAGIQ MICRO

COLOR: BLACK
ART.-N°: 7-02400-02



D

MICROLINE

COLOR: BLACK
ART.-N°: 7-02403-02



E

SNOOKER

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02232-02



SNOOKER METAL

AVAILABLE IN CHROME FINISH
ART.-N°: 7-02409-02



CHROME

F

HANGOVER

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02236-02



G

DISQ ROUND

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02153-02



DISQ ROUND METAL

AVAILABLE IN 3 FINISHES
ART.-N°: 7-02152-02



COPPER



STAINLESS STEEL



CHROM

H

DISQ SQUARE

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 7-02155-02



DISQ SQUARE METAL

AVAILABLE IN 3 FINISHES
ART.-N°: 7-02154-02



COPPER



STAINLESS STEEL



CHROM





- 01
- 02
- 03
- 04
- 05
- 07
- 08
- 09
- 12
- 13
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29

RAL Classic or any other special color on request







MAGIQ MICRO



IMAGINE MICRO

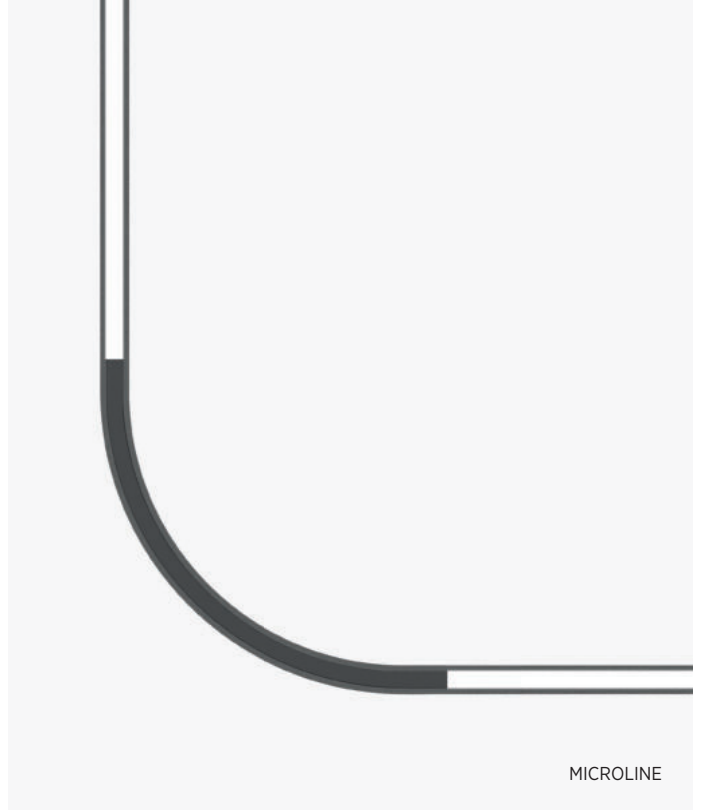

MICROLINE

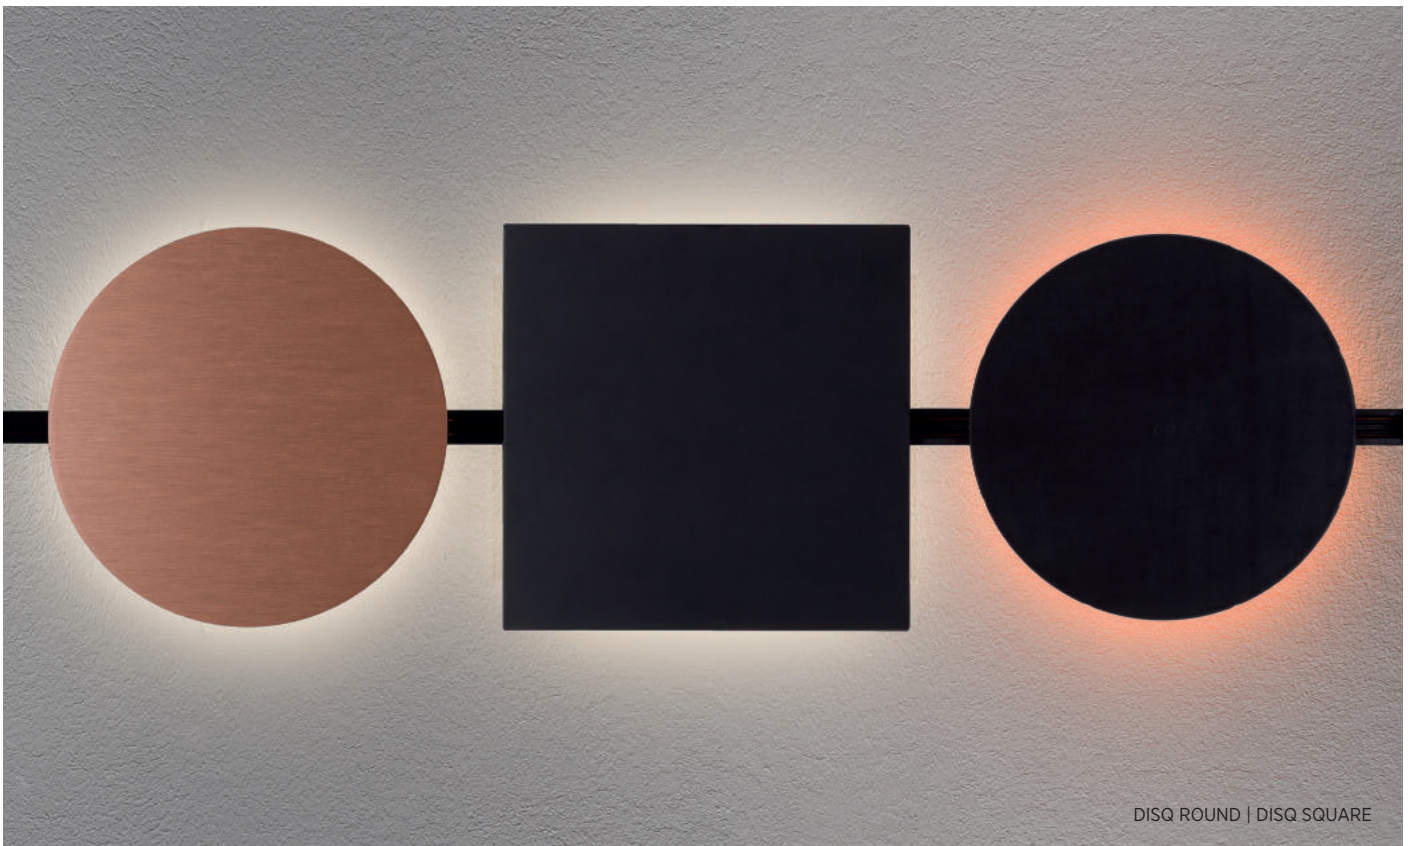

DISQ ROUND | DISQ SQUARE

TOM
DIXON
× PROLICHT



PHOTO | TOM DIXON

OPAL SMALL






PHOTO | ARMIN KUPRIAN

MINIMAL TRACK: COLOR 02 BLACK | IMAGINE MICRO

IMAGINE MICRO

The ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design. The IMAGINE MICRO spotlights are available in 25 PROLICHT colors. Special colors can be ordered on request.



IMAGINE MICRO 20
ART.-N° 7-02825-02

Ø 23 mm L: 72 mm

LUMEN MAX.

202 lm

WATT

3.7 W

CCT

2700 K 3000 K 4000 K



BEAMWIDTH



SPOT
16°




MEDIUM
26°

ADAPTER COLOR

BLACK WHITE

25 PROLICHT COLORS



IMAGINE MICRO 35
ART.-N° 7-02845-02

Ø 35 mm L: 95 mm

LUMEN MAX.

515 lm

WATT

8.6 W

CCT

2700 K 3000 K 4000 K



BEAMWIDTH



FLOOD
18°



VERY WIDE FLOOD
28°

ADAPTER COLOR

BLACK WHITE

25 PROLICHT COLORS




RAL Classic or any other special color on request

YOUR PERFECT FOCUSING For the perfect definition of your light setting, not only each spot can be tilted from 0° to 90° and rotated 355°, but comes also equipped with a tool-less locking system, to fix in position the desired rotation, even when spots are installed in a vertical track but comes also equipped with a tool-less locking system. The spots can be easily fixed in the desired position, even when they are installed in a vertical track.







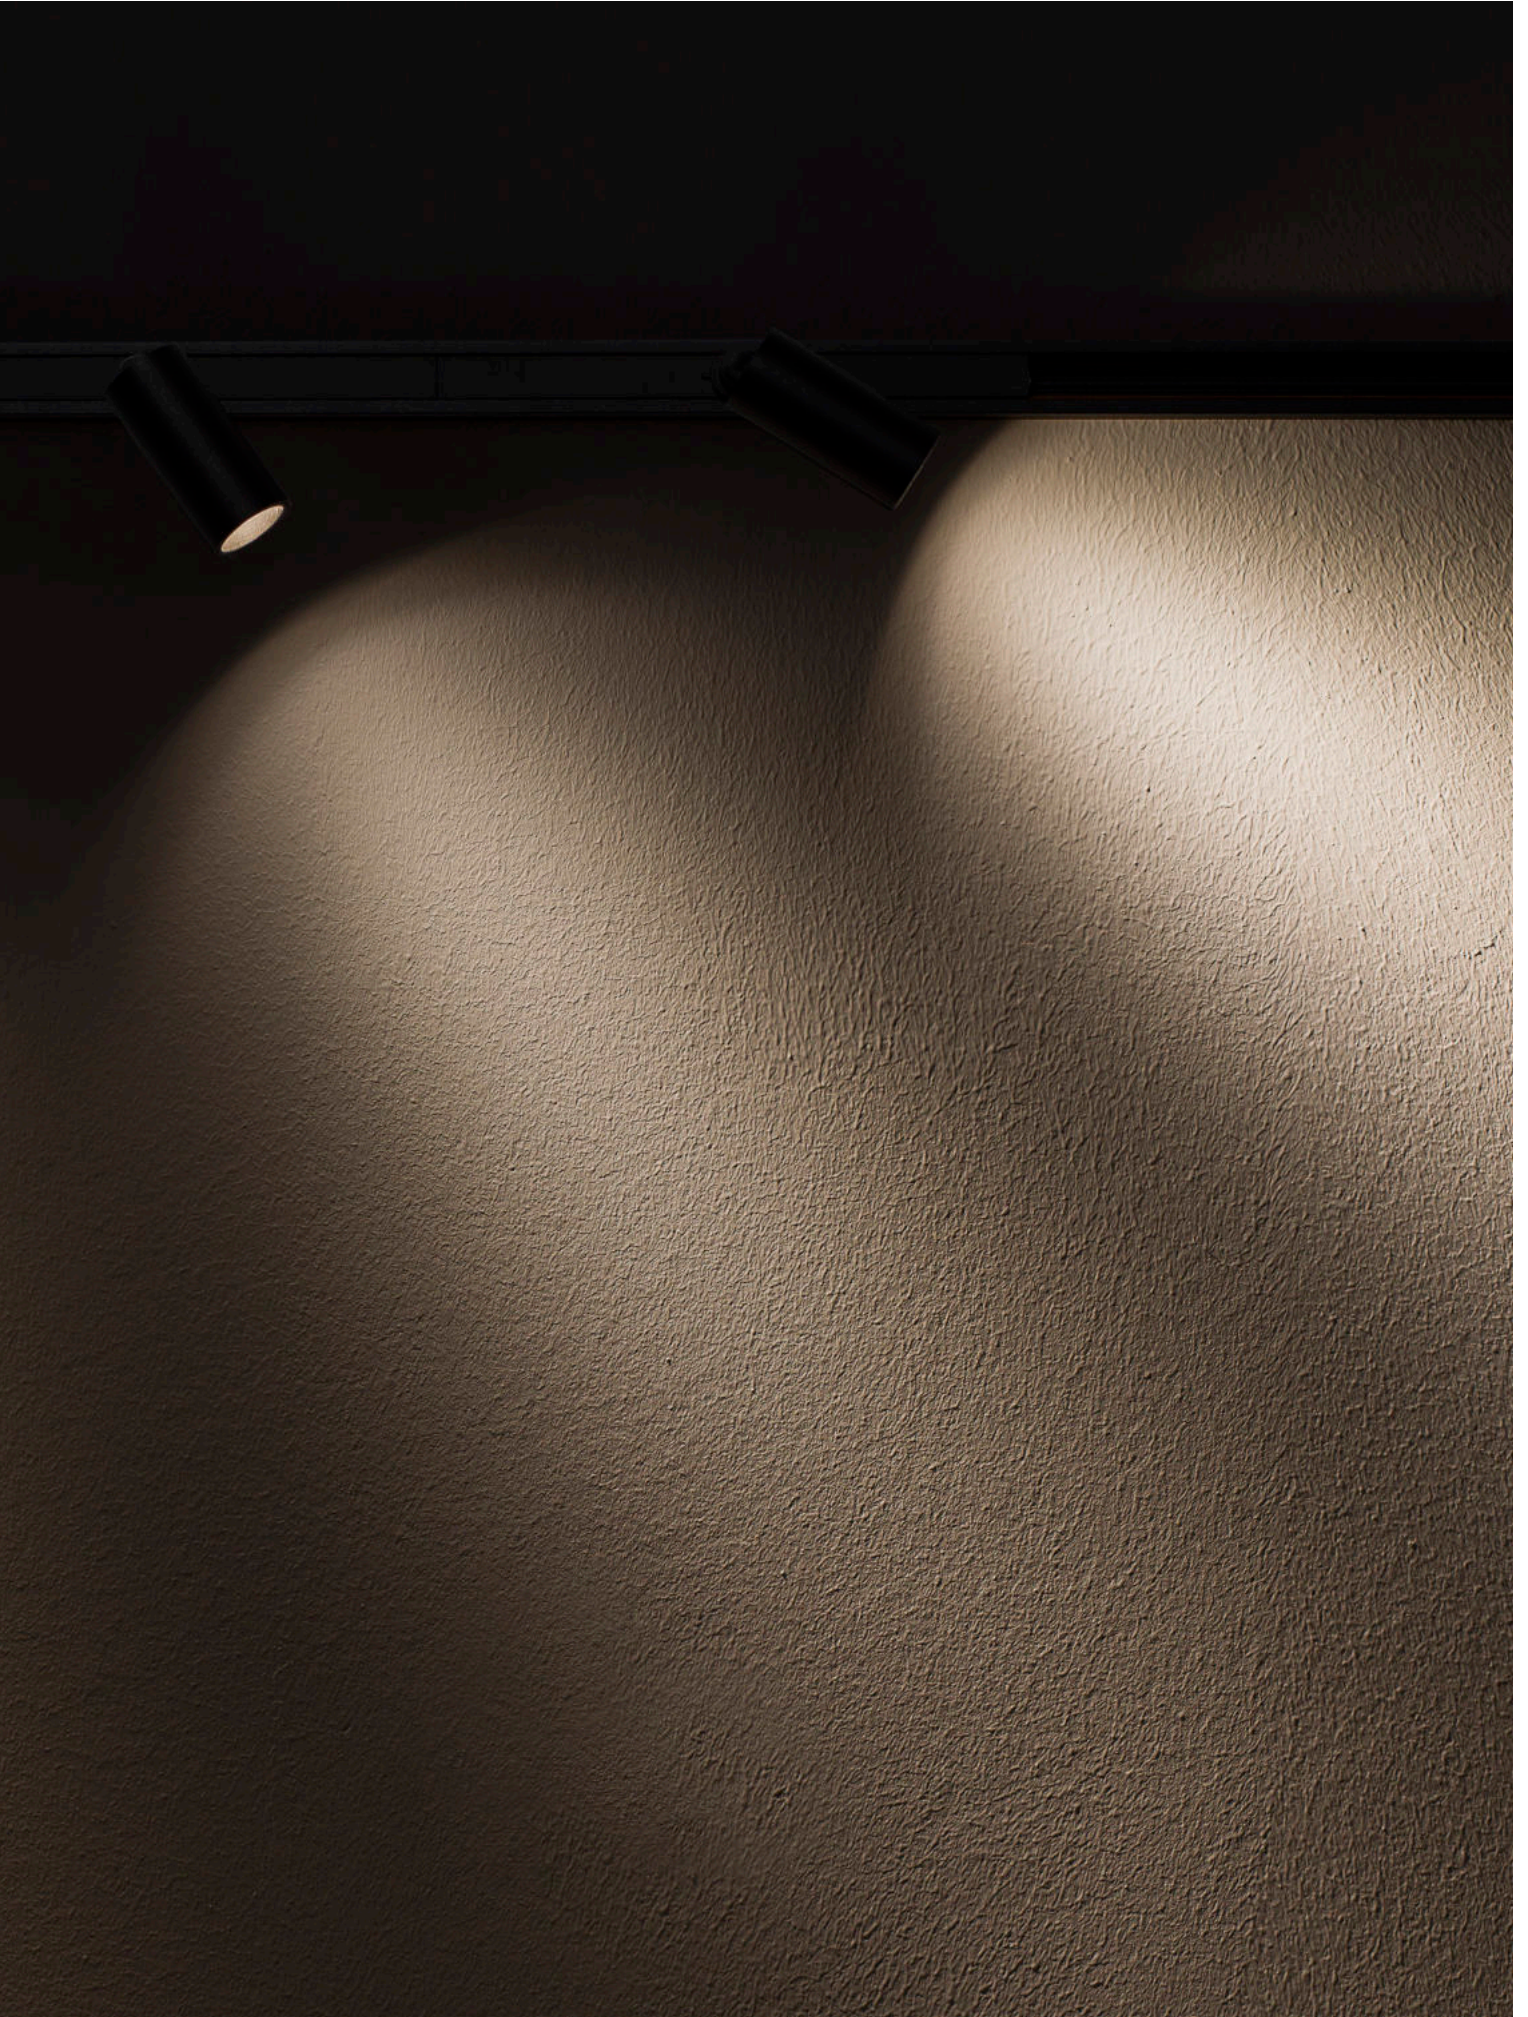



INSPIRATION | AUREL PÉTIC

MAGIQ MICRO

The MAGIQ MICRO is part of the MAGIQ family and works with DALI, CASAMBI or PUSH DIM. The inserts can be lined up to fill the whole track with the MAGIQ inserts while the distance of the single dots stays always the same. This leads to a coherent appearance of the system and uniform illumination.



MAGIQ MICRO
ART.-N° 7-02400-02
L: 300 mm x 11 H: 7 mm

LUMEN MAX.

429 lm

WATT

7,3 W

CCT

2700 K

3000 K

ADAPTER COLOR

BLACK

WHITE

MICROLINE

The specially developed LED Lines can be controlled individually with DALI, CASAMBI and PUSH DIM. The MICROLINE is an essential part of the range of inserts for the MINIMAL TRACK and offers shadowfree LED lines to be integrated into the architecture. Within the track, the lines are seamlessly installed and keep the appearance of the track as minimalistic as intended.



MICROLINE
ART.-N° 7-02401-02
L: 674 mm (508+166)

LUMEN MAX.	
429 lm	
WATT	
8 W	
CCT	
2700 K	3000 K



MICROLINE
ART.-N° 7-02402-02
L: 1174 mm (1008+166)

LUMEN MAX.	
858 lm	
WATT	
15.8 W	
CCT	
2700 K	3000 K



MICROLINE
ART.-N° 7-02403-02
L: 1674 mm (1508+166)

LUMEN MAX.	
1287 lm	
WATT	
24 W	
CCT	
2700 K	3000 K




PHOTO: ARMIN KUPRIAN

DISQ ROUND COLOR, COLOR 02 BLACK VELVET | DISQ SQUARE, STAINLESS STEEL

DISQ ROUND and DISQ SQUARE are new inserts for the MINIMAL TRACK, offering refined complements to the family. With its discrete 2700K indirect emission and its DALI DIM functionality, DISQ offers maximum lighting comfort.

The inserts are available in two different versions: with a metal plate, which is available in copper, chrome or a stainless steel finish, and a color version, that can be individualized in our 25 PROLICHT colors.



DISQ ROUND METAL
ART.-N° 7-02152-02

Ø 206 mm

LUMEN MAX.
400 lm

WATT
5.1 W

CCT
2700 K

COVER WITH METAL FINISH




COPPER STAINLESS STEEL CHROME

DISQ ROUND
ART.-N° 7-02153-02

Ø 206 mm

25 PROLICHT COLORS



DISQ SQUARE METAL
ART.-N° 7-02154-02

W: 216 x 216 mm

LUMEN MAX.
400 lm

WATT
5.1 W

CCT
2700 K

COVER WITH METAL FINISH



COPPER STAINLESS STEEL CHROME

DISQ SQUARE
ART.-N° 7-02155-02


W: 216 x 216 mm

25 PROLICHT COLORS




RAL Classic or any other special color on request

CAN-HAVE ACCESSORY DISQ ROUND | AURA COVER



CAN-HAVE ACCESSORY DISQ SQUARE | AURA COVER



The DISQ ROUND | SQUARE inserts can also be equipped with the AURA COVER accessories: softening the light, highlighting the shape and creating a floating colored effect.



MINIMAL TRACK: COLOR 02 BLACK VELVET | DISQ ROUND: COPPER | AURA COVER: YELLOW



INSPIRATION / BRANDSHOOT

MINIMAL TRACK: COLOR 03 BLACK VELVET | DISQ SQUARE: STAINLESS STEEL | AURA COVER: BLUE








PHOTO | GÜNTHER EGGER

SNOOKER, COLOR 25 GUN METAL, SHINE RING WHITE | SNOOKER, COLOR 25 GUN METAL & COLOR 08 IN THE ARMY

SNOOKER The iconic spherical luminaire SNOOKER is a real eye catcher on its own or grouped in multiples as a light installation. Configurable in the PROLICHT colors, with an additional KORONA SHINE RING and with adjustable cable lengths, SNOOKER offers plenty of design freedom. The unique MICRODOT lens provides pure light with optimum glare control.

The integrated lens optics allow beam angles of 32° and 58° while offering a maximum effect with a minimal light emission opening.



SNOOKER
ART.-N° 7-02232-02

Ø 72 mm

LUMEN MAX.

352 lm

WATT

6.5 W

CCT

2700 K

3000 K

4000 K

BEAMWIDTH



MEDIUM

32°



VERY WIDE FLOOD

58°

25 PROLICHT COLORS

CAN-HAVE ACCESSORY | SHINE RING



RAL Classic or any other special color on request


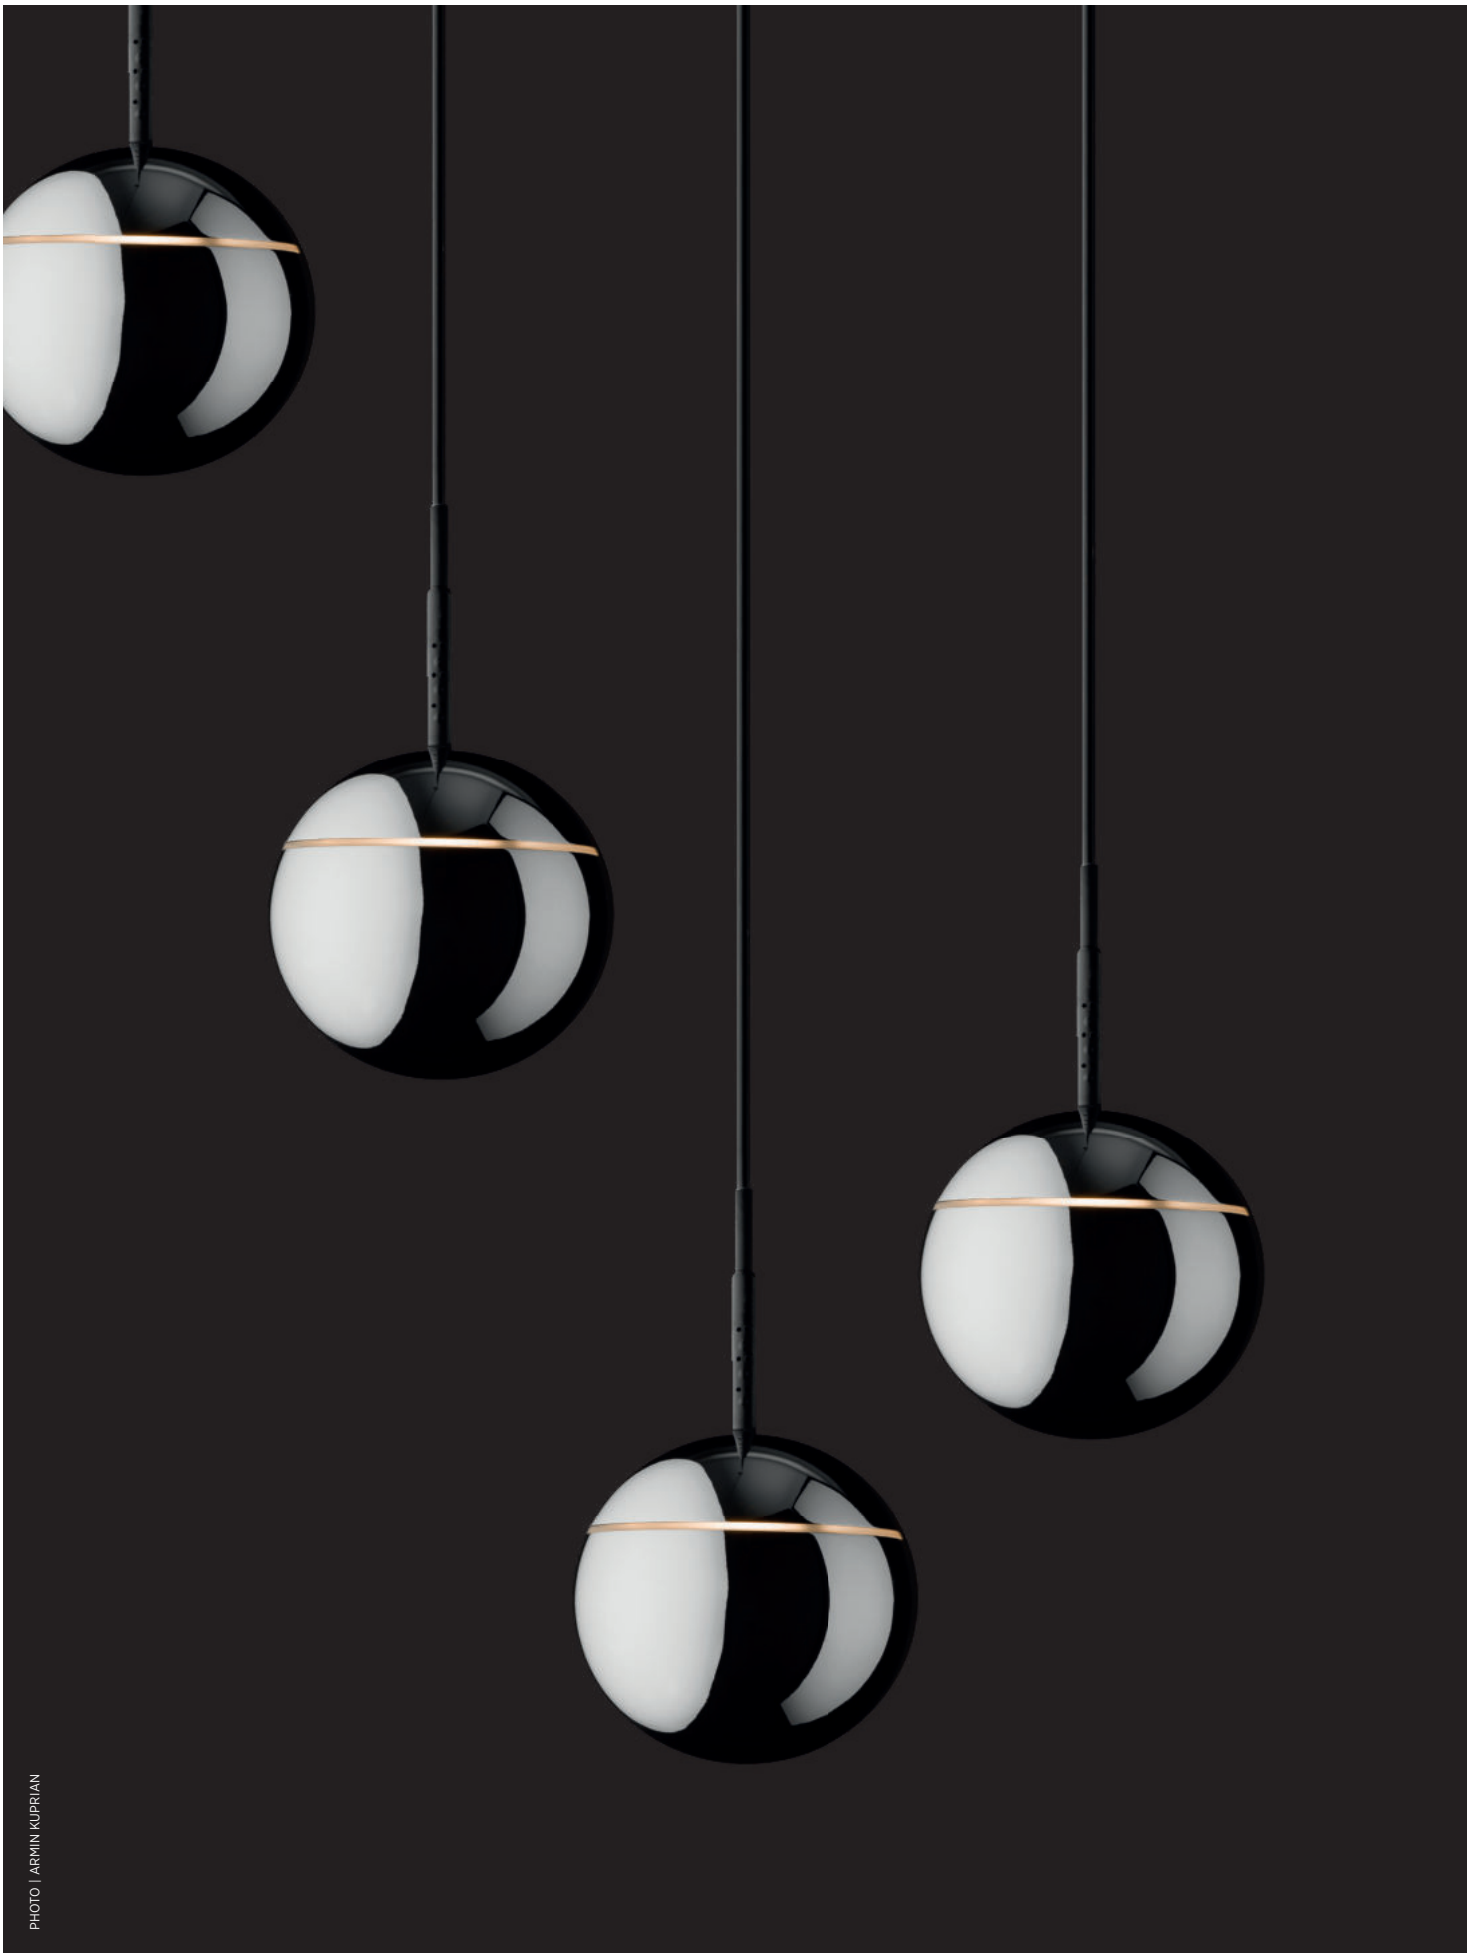


PHOTO | ARMIN KUPRIAN

SNOOKER METAL CHROME | SHINE RING WHITE

SNOOKER METAL. The new chrome finish of our iconic SNOOKER luminaire provides for a high class feel in every space. Its reflective surface leads to new possibilities to combine elements of the MINIMAL TRACK family and brings highly creative lighting ideas to life.



SNOOKER METAL
 ART.-N° 7-02409-02
 SNOOKER METAL SHINE
 ART.-N° 7-02420-02

Ø 72 mm

LUMEN MAX.

352 lm

WATT

6.5 W

CCT

2700 K

3000 K

4000 K

BEAMWIDTH



MEDIUM

32°



VERY WIDE FLOOD

58°

SNOOKER METAL

CHROME



CAN-HAVE ACCESSORY | SHINE RING



WHITE



YELLOW



ORANGE



RED



BLUE



GREEN

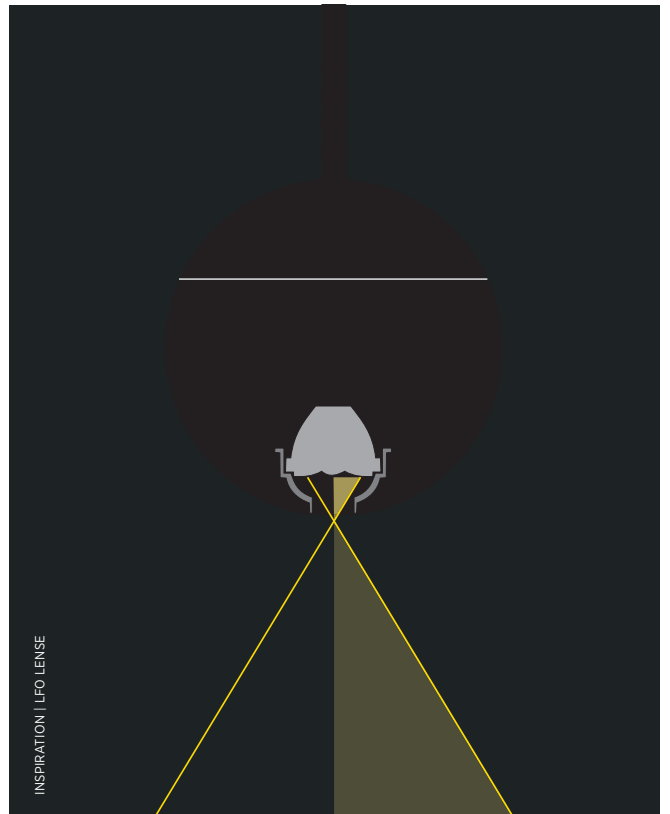






PHOTO | STUDIO KERSCHBAUM

SNOOKER, COLOR 27 COPPER MINE, SHINE RING WHITE | SNOOKER, COLOR 29 JAZZ GOLD





MAAT - LISBOA | PHOTO: NUNO SOUSA DIAS





PHOTO | ARMIN KUPRIAN

HANGOVER SHINE, COLOR 25 GUN METAL, SHINE RING WHITE | HANGOVER KORONA, COLOR 27 COPPER MINE

The HANGOVER PLUG suspended spot together with the PLUG EXSTENSIONS allows a manual adjustment of the wire suspension: the spotlights are available with a rope length of 2 or 4 meters and can be manually shortened or lengthened by rolling into the canopy.

An ingenious docking system guarantees quick replacement and quick locking of the various HANGOVER PLUG modules: this way, the lights can be exchanged at will, giving room for a new look over and over again. The docking system is also available for other product families and guarantees that other luminaires can also be easily mounted (SNOOKER | MELT and OPAL by Tom Dixon)



HANGOVER 30
ART.-N° 7-02233-02

Ø 28 mm L: 150 | 300 | 450 mm

LUMEN MAX.		
446 lm		
WATT		
6.5 W		
CCT		
2700 K	3000 K	4000 K
BEAMWIDTH		
MEDIUM	VERY WIDE FLOOD	
26°	56°	
25 PROLIGHT COLORS		



HANGOVER 30 MICRO DOT
ART.-N° 7-02234-02

Ø 28 mm L: 150 | 300 | 450 mm

LUMEN MAX.		
352 lm		
WATT		
6.5 W		
CCT		
2700 K	3000 K	4000 K
BEAMWIDTH		
MEDIUM	VERY WIDE FLOOD	
32°	58°	
25 PROLIGHT COLORS		



HANGOVER 40
ART.-N° 7-02239-02

Ø 40 mm L: 150 | 300 mm

LUMEN MAX.		
868 lm		
WATT		
10 W		
CCT		
2700 K	3000 K	4000 K
BEAMWIDTH		
FLOOD	WIDE FLOOD	
40°	52°	
25 PROLIGHT COLORS		

CAN HAVE ACCESSORY HANGOVER 30 & 40 | SHINE RING (not available for MICRODOT)



WHITE



YELLOW



ORANGE



RED



BLUE



GREEN



RAL Classic or any other special color on request




STADTGALLERIE SCHWAZ | PHOTO: SIMON FISCHBACHER

HANGOVER | COLOR 02 BLACK VELVET | CORONA CONE 02 BLACK VELVET



KORONA CONE

KORONA CONE
The deep reflector directs the light effectively past the cone without changing the light color. The cone can be customized in any of the 25 PROLIGHT colors.

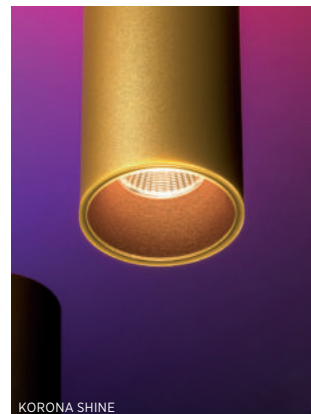

KORONA SHINE

SHINE RING
The luminaire can also be equipped with a luminous ring in one of 6 differ colors. KORONA SHINE creates colorful accents and atmospheric highlights.

MICRODOT

The integrated lens optics allow beam angles between 24° and 58°. The available variants with MICRODOT technology offer maximum effects. JUST LIGHT - NO GLARE



PHOTO | ARMIN KUPRIAN

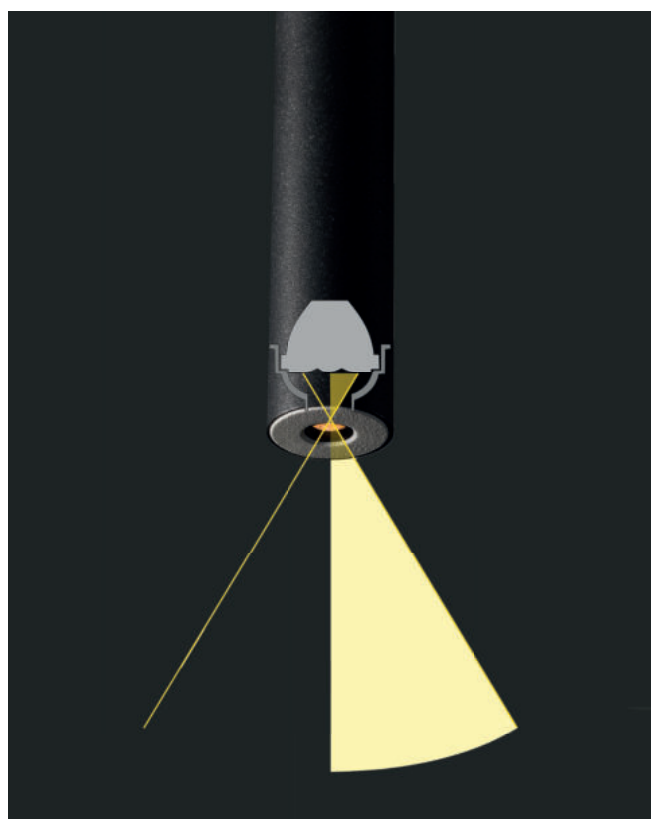




PHOTO | ARMIN KUPRIAN

HANGOVER, COLOR 25 GUN METAL | CORONA CONE, COLOR 27 COPPER MINE

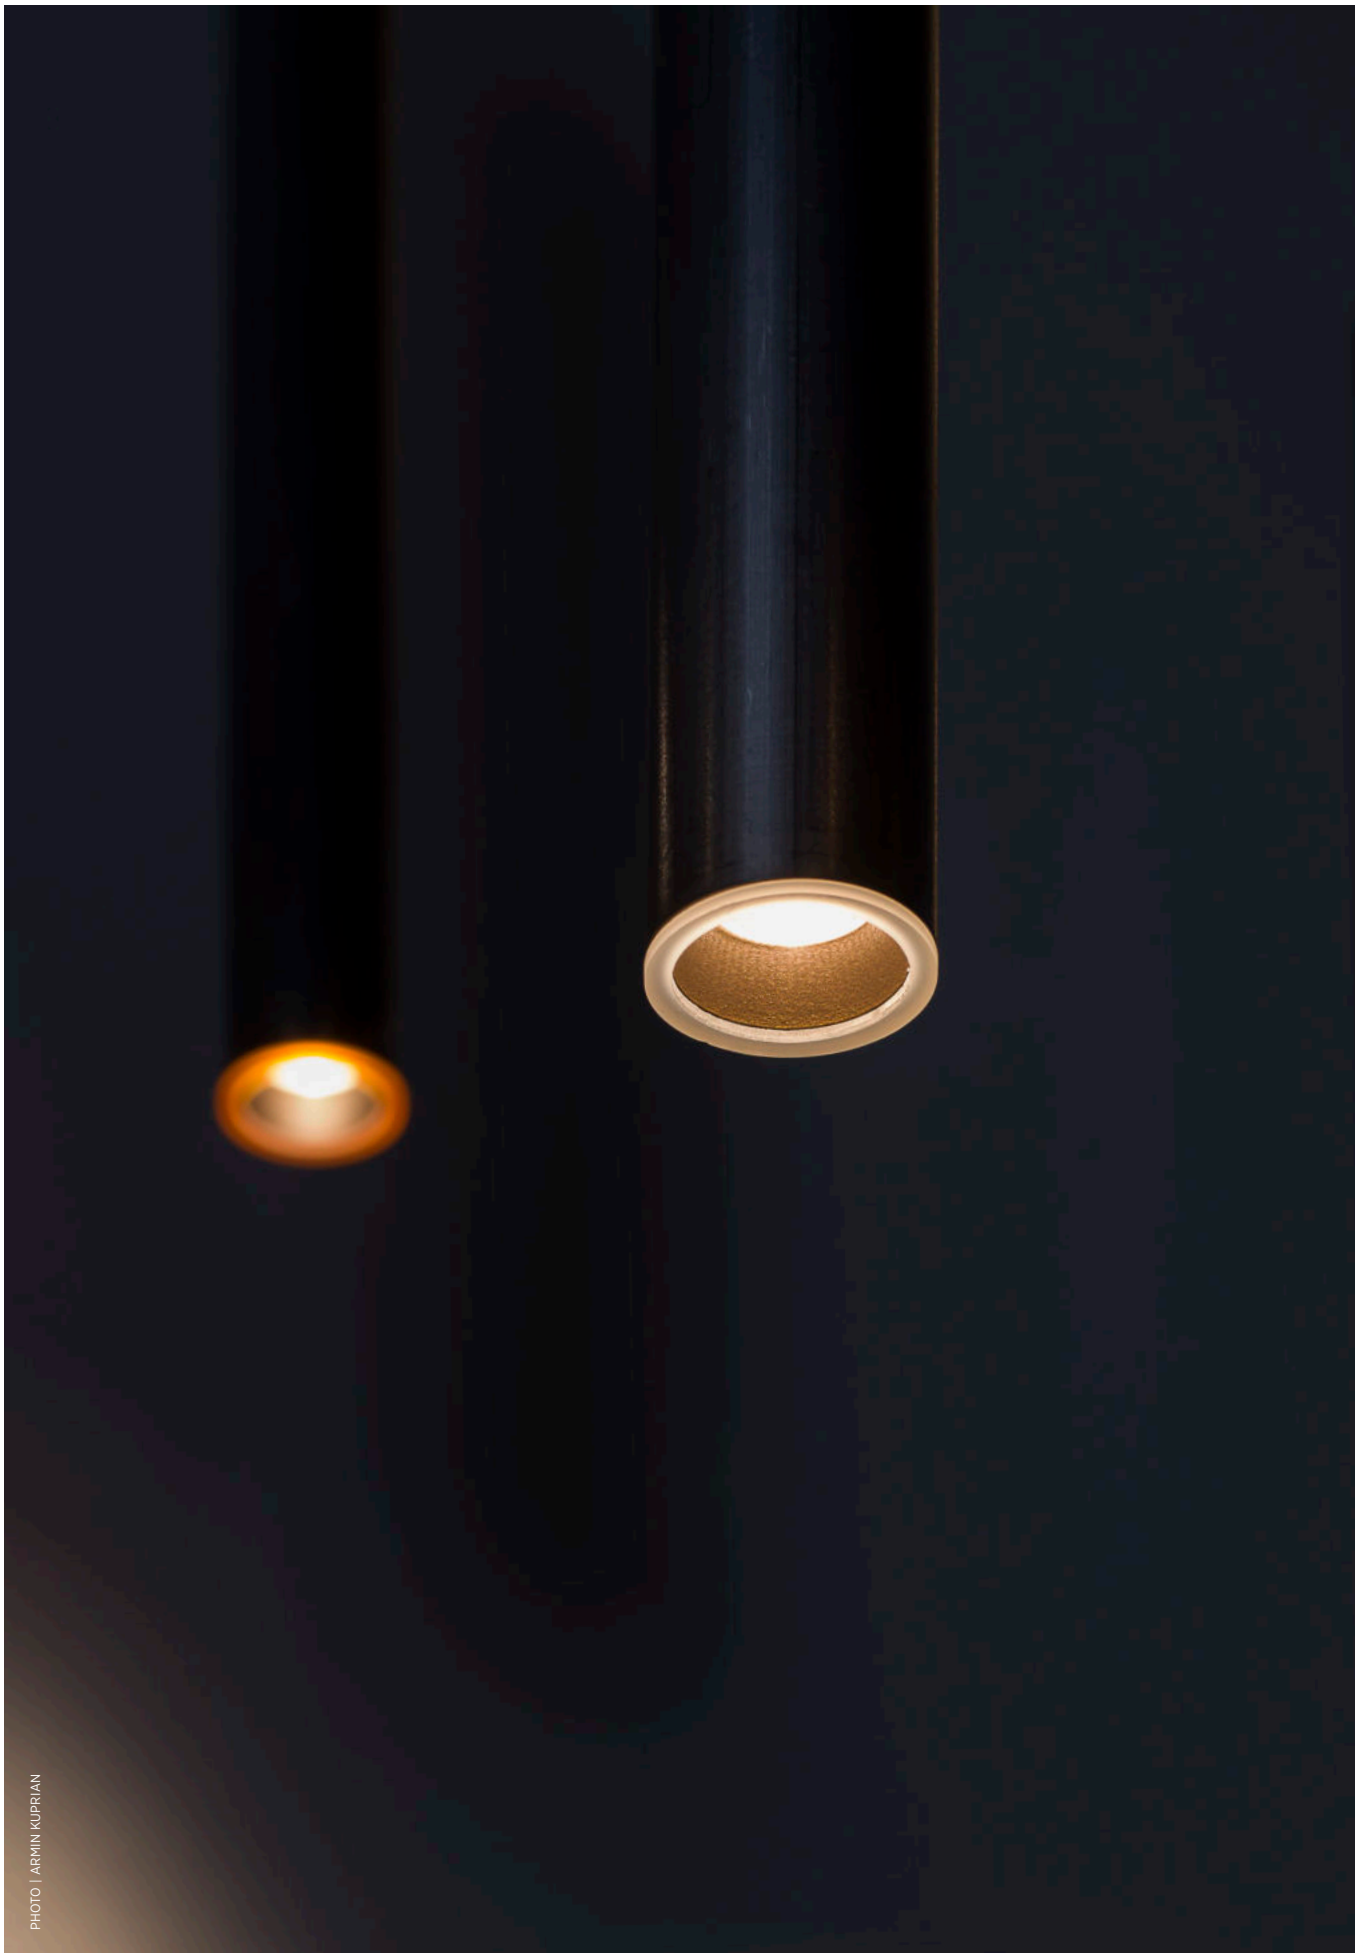


PHOTO | ARMIN KUPRIAN

HANGOVER SHINE, COLOR 25 GUN METAL | SHINE RING WHITE & ORANGE



PHOTO | FELIX GERLACH

HANGOVER: COLOR 25 GUN METAL | CORONA CONE: COLOR 19 KISSING APHRODITE



TOM
DIXON
× PROLICHT



MELT MINI is a beautifully distorted small pendant in a modern metal finish. Featuring an intergrated LED module, this luminaire creates a mesmerizing melting hot blown glass effect when on and a mirror shine effect when off. The luminaire is produced, using a sophisticated manufacturing technique to achieve the perfect melted orb.



MELT MINI
ART.-N° TD-414-0012XX

DIAMETER	Ø 280 mm
LUMEN MAX.	234 lm
WATT	8 W
CCT	3000 K

COLOR



TOM
DIXON
× PROLICHT



PHOTO | ARMIN KUPPRIAN

MELT MINI | CHROME



TOM
DIXON
× PROLICHT



PHOTO | ARMIN KUPPIAN

MELT MINI | GOLD, COPPER & CHROME



TOM
DIXON
× PROLICHT



PHOTO | COMDESIGN.NET-ANNA RIEDER

MELT MINI | GOLD



TOM
DIXON
× PROLICHT



PHOTO | TOM DIXON

OPAL SMALL is a small translucent pendant light. Produced with a High-tech manufacturing technique and designed using a recipe of opalescent polycarbonate, which results in a satisfyingly ethereal orb. Coupled with the new Tom Dixon LED, the shatter proof OPAL pendant emits soft, diffused and flattering light.



OPAL LED
ART.-N° TD-414-00320P

DIAMETER

Ø 250 mm

LUMEN MAX

506 lm

WATT

8 W

CCT

3000 K

TOM
DIXON
× PROLICHT





ACCESSORIES FOR PENDANT INSERTS

A PLUG CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS
coax cable 2 or 4 m | 5 colors
ART.-N°: 800-1428

ADAPTER BLACK
ADAPTER WHITE



B PLUG CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS
coax cable 10 m | BLACK
ART.-N°: 800-1429

ADAPTER BLACK
ADAPTER WHITE



C PLUG CONNECTOR OVER TABLE

AVAILABLE IN 25 PROLICHT COLORS
coax cable 1.1 m | BLACK
ART.-N°: 800-1434

ADAPTER BLACK
ADAPTER WHITE

as part of TD-414-00320P-1M
(Tom Dixon OPAL 25)



D CABLE LOOP | WALL-CEILING

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-2060



E CABLE ROLLER | WALL-CEILING

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-2061



F CABLE ROLLER

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-2063



G SUSPENDED ROLLER

AVAILABLE IN 25 PROLICHT COLORS
ART.-N°: 350-2064





RAL Classic or any other special color on request

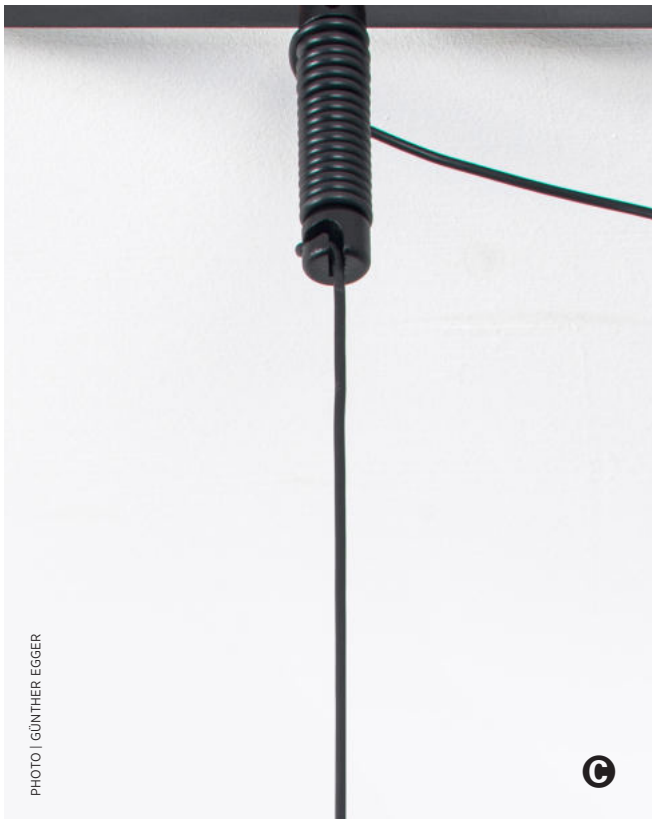


PHOTO | GÜNTHER EGGER



With the optional cable loop components and the various cable roller sizes, an adaptation in length is possible at any time in the simplest way. Individualization in the 25 PROLICHT colors is possible so that the components fit perfectly into the existing room concept.



PHOTO | ARMIN KUPPIAN

With the plug connector, SNOOKER and HANGOVER PLUG luminaires can be easily exchanged at any time.

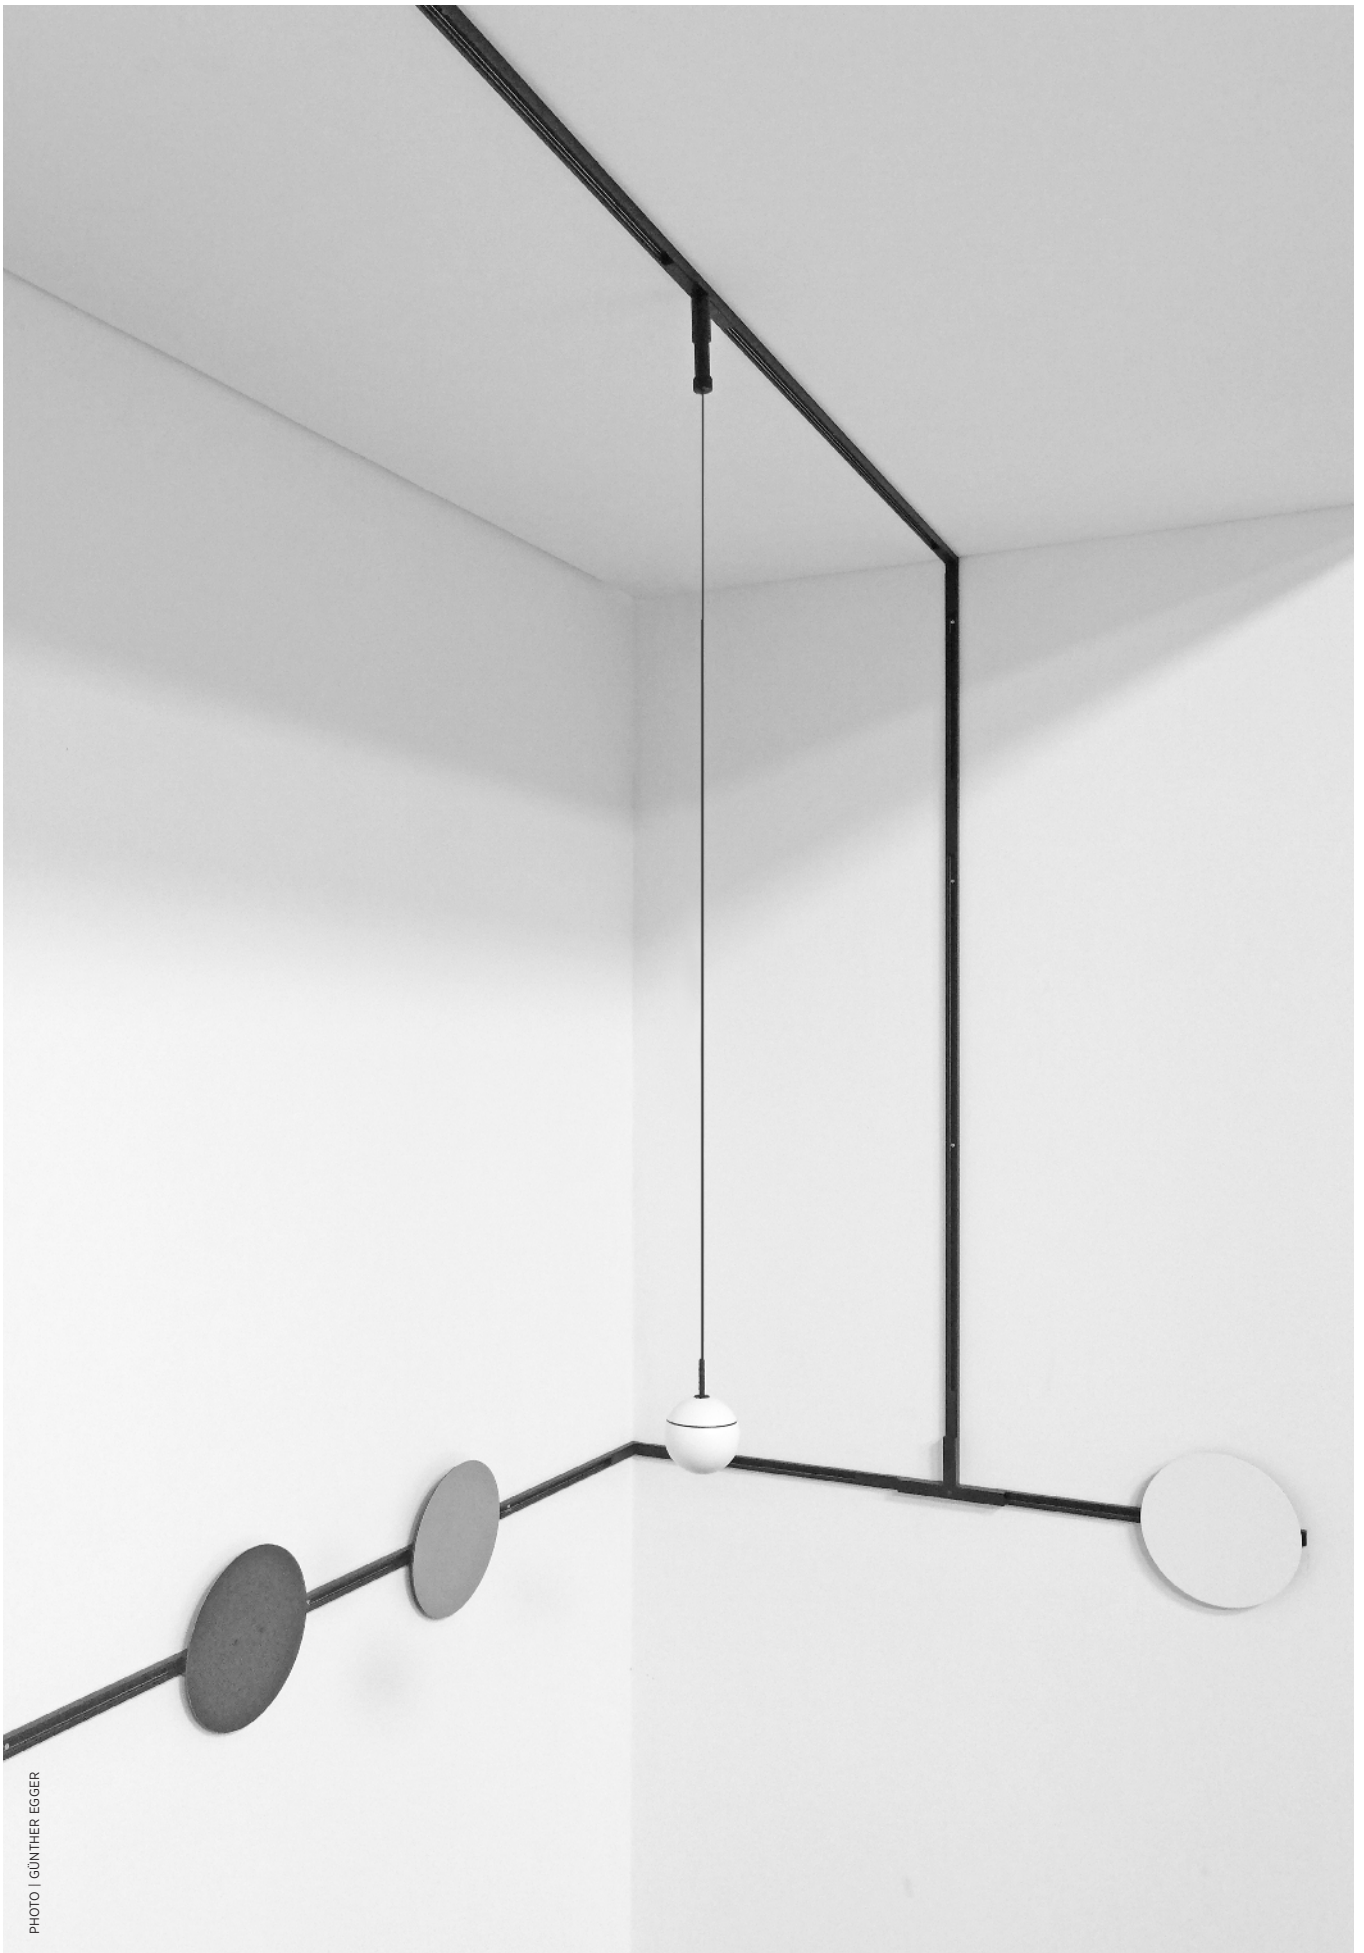


PHOTO | GÜNTHER EGGER





Various cable loops can be used to create patterns that can be placed anywhere in the room and expanded across ceilings and walls. By offering this creative freedom to the designer, cables of pendant lights can be turned into additional design elements. The MINIMAL TRACK system offers you unprecedented freedom to fulfill your wishes/requirements from a functional and a creative perspective.

The main goal of this system is to bring illumination to the places where it is needed - this means that the MINIMAL TRACK liberates the designer from thinking about where the power outlet is and enables a highly individualistic design vision.











SNOOKER, COLOR 02 BLACK VELVET | OPAL SMALL | HANGOVER, COLOR 25 GUN METAL



MELT MINI CHROME

Minimalistic design, minimal installation effort, tailor-made result in the most simple way - that's the MINIMAL TRACK system. Now it can be equipped with our well-known SNOOKER and HANGOVER inserts to give you even more possibilities to enrich your design concept.

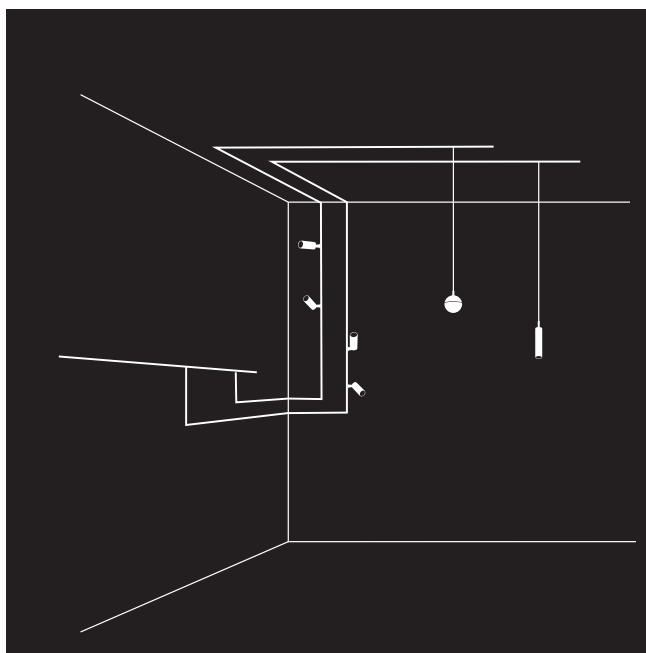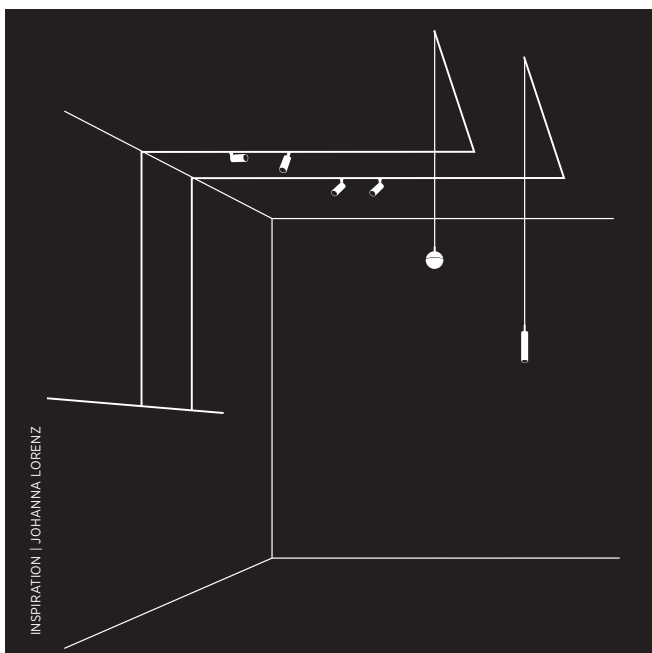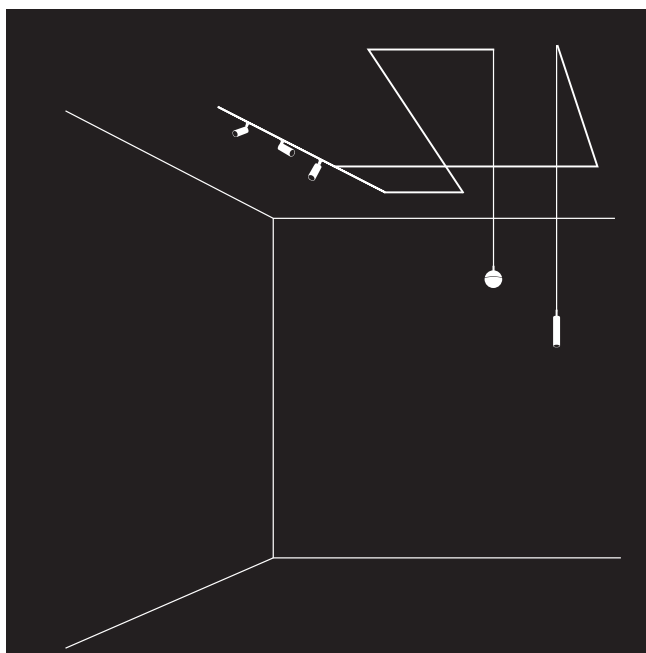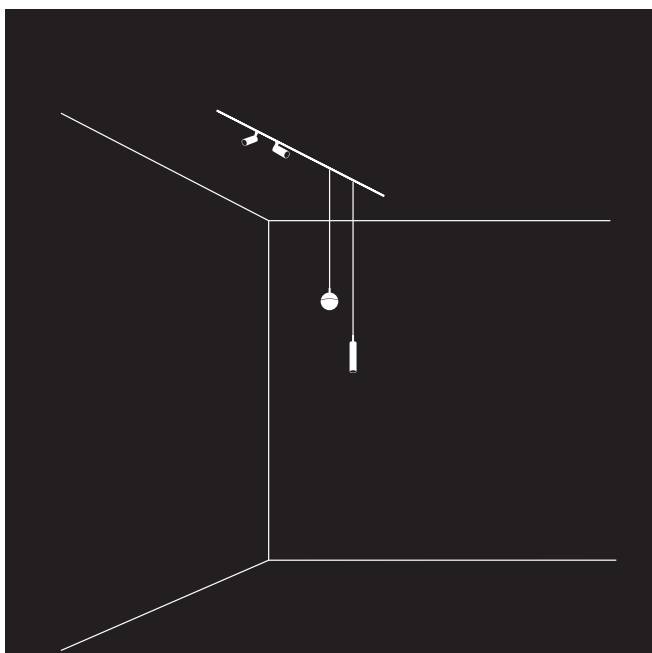

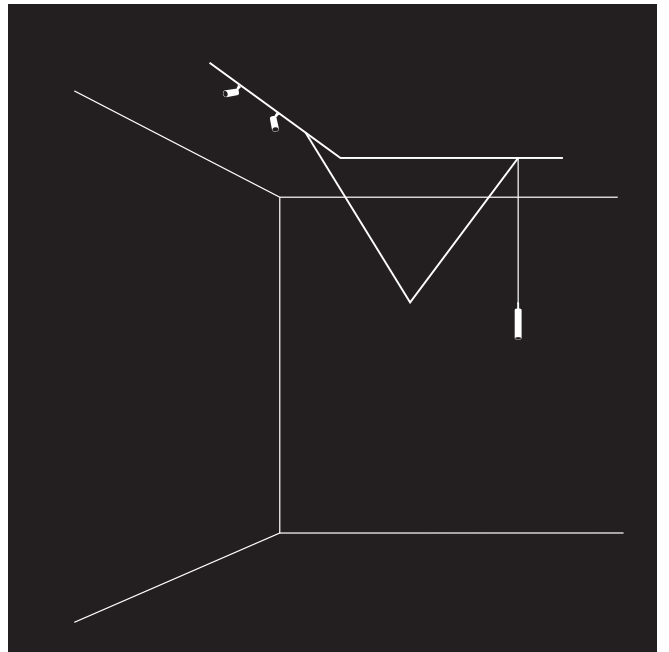
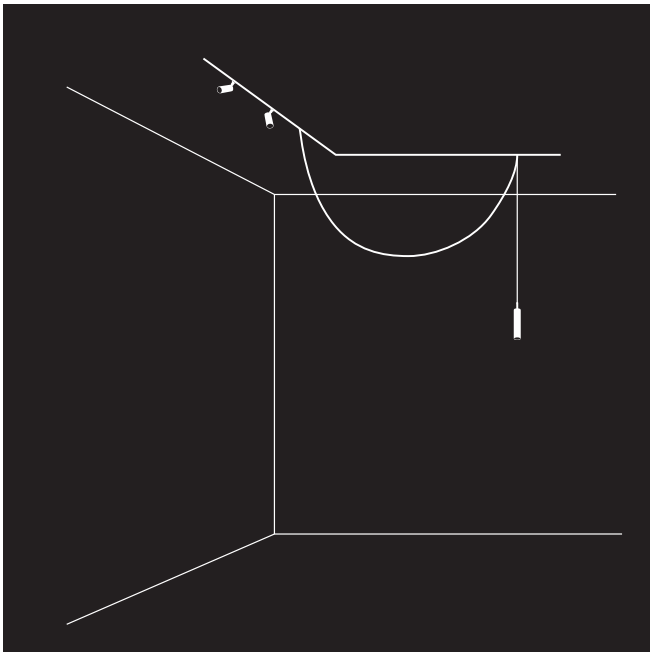
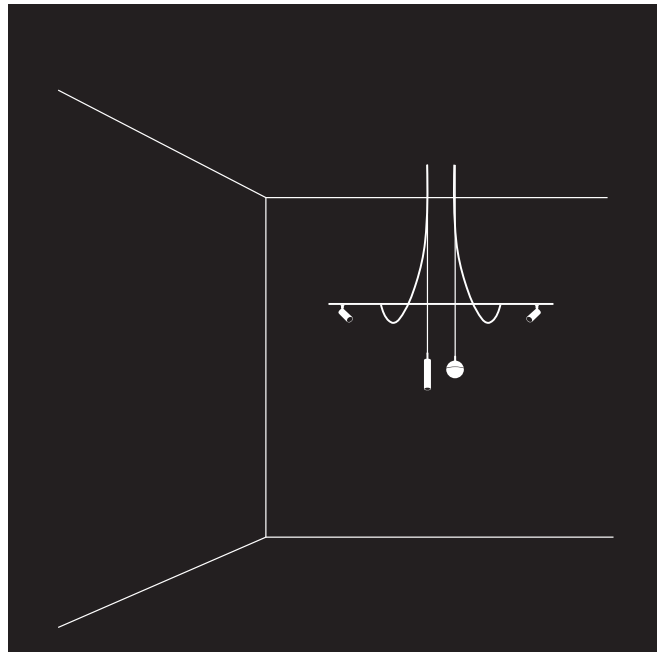
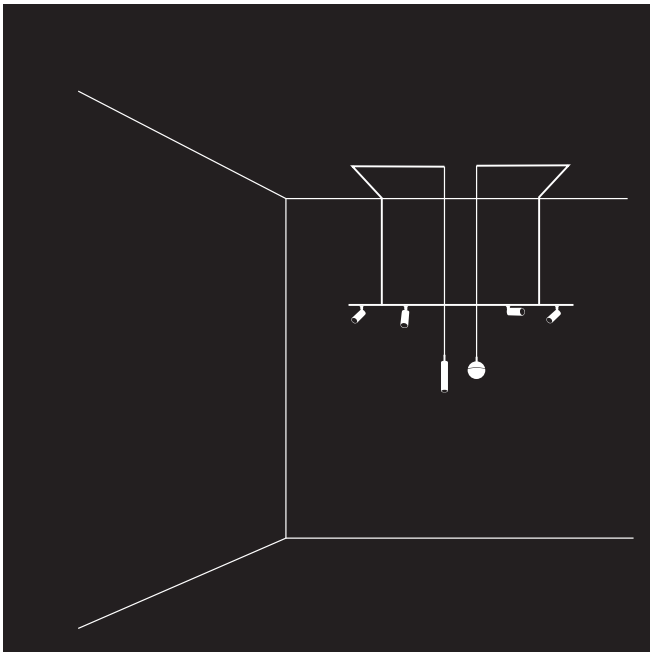







EXACTLY THE LIGHT YOU WANT

Every moment, every day and every situation is different. Up to 64 inserts for the MINIMAL TRACK can be dimmed individually, in groups or together with DALI and CASAMBI. This enables complete control of your lighting atmosphere.

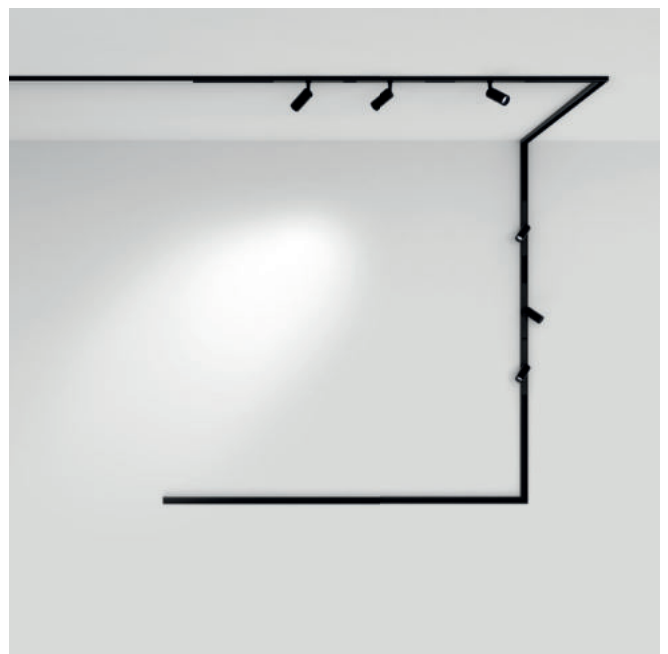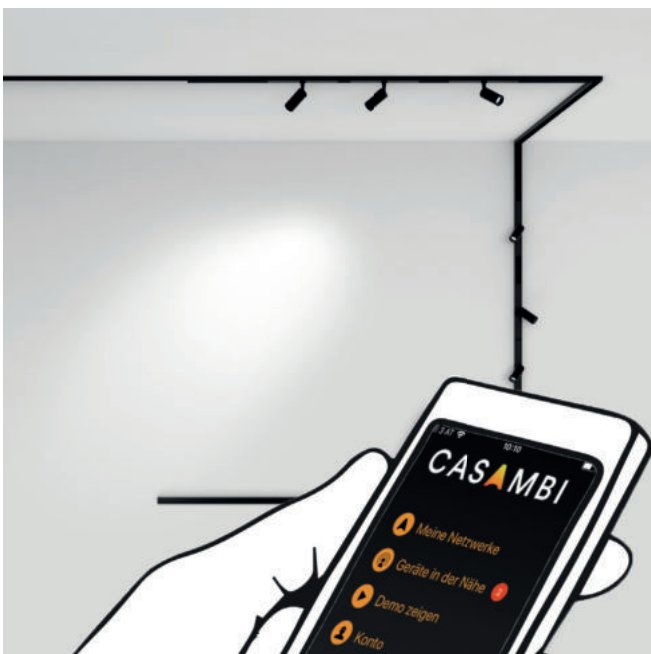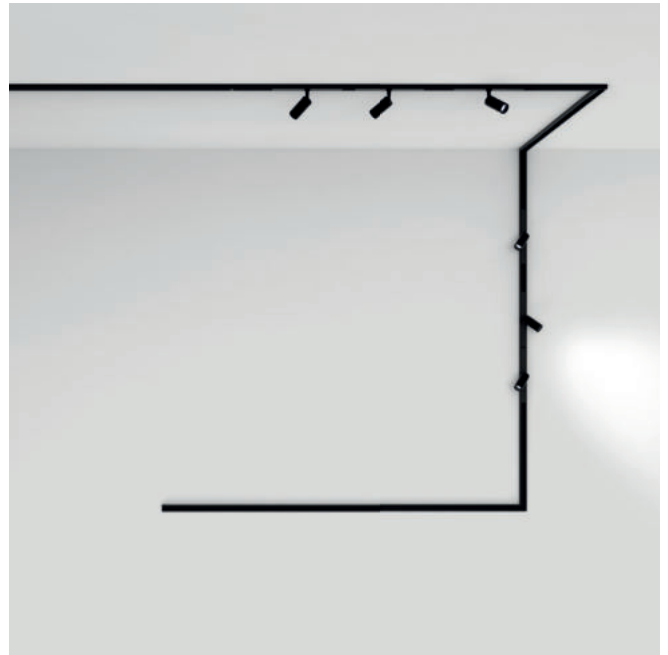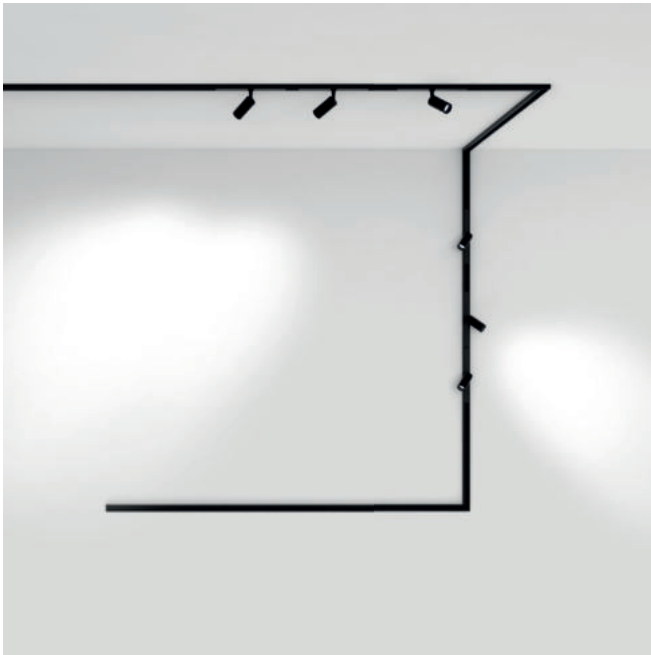

Despite its exceptionally compact size, the MINIMAL TRACK is designed as a DALI track that can be integrated into any lighting control system. It has two conductors dedicated to DALI in order to enable completely individual control of each installed luminaire.

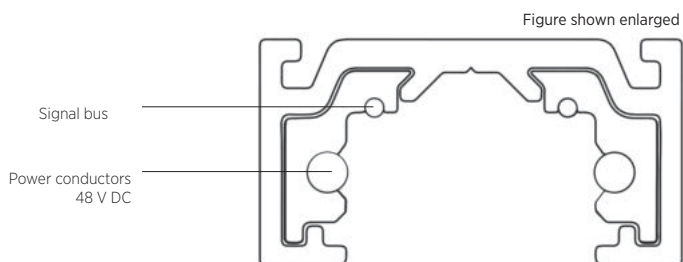

64 ADDRESSES

DALI offers individual control of each single luminaire with the possibility of managing groups and scenarios.



8 ADDRESSES

The CASAMBI control allows wireless regulation of up to eight groups of fittings, through physical commands or a mobile App.



1 ADDRESS

The PUSH DIM solution offers simple control of all the fittings in the same line that can be easily dimmed with a standard pushbutton.



1 ADDRESS

Simply ON / OFF without any control



1 ADDRESS

Imagine a world where all your devices seamlessly work together. The idea is simple. The impact is powerful.






PHOTO | ARMIN KUPRIAN




TABLET



MOBILE PHONE



SMART SWITCH



STANDARD SWITCH

EXACTLY THE CONTROL YOU NEED

PUSH DIM | 1 ADRESS


All of the inserts are dimmed in parallel and the last scene is stored.

CASAMBI | 8 ADRESSES


Up to eight individual spots or groups and scenes can be controlled with CASAMBI.

DALI 2 | 64 ADRESSES

With DALI, 64 inserts can be individually programmed and saved scenes are available to be fetched from the storage. With this control, every room can be individually programmed or integrated into a holistic DALI solution for the whole object. In addition, a smaller housing of the control can be integrated into switch boxes to save space.

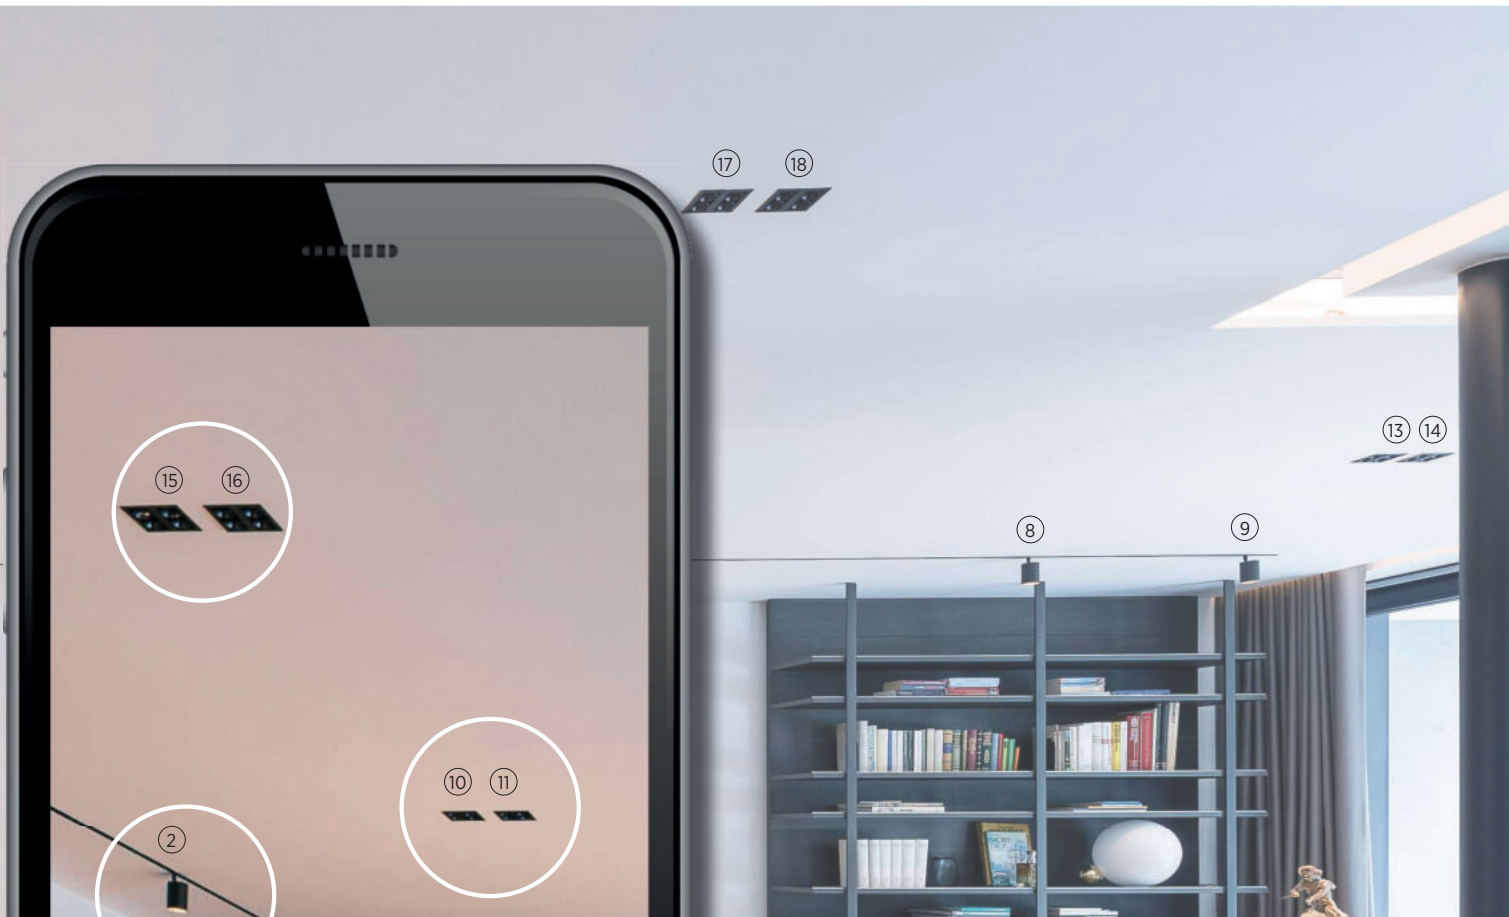



CONNECTION EXAMPLE

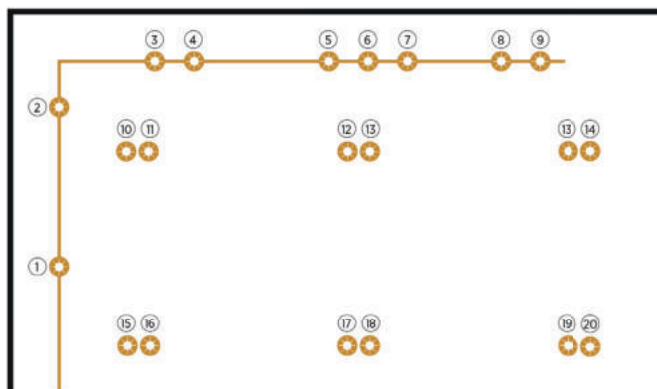

MATTER | 1 ADRESSE

Imagine a world where all your devices seamlessly work together. The idea is simple. The impact is powerful.

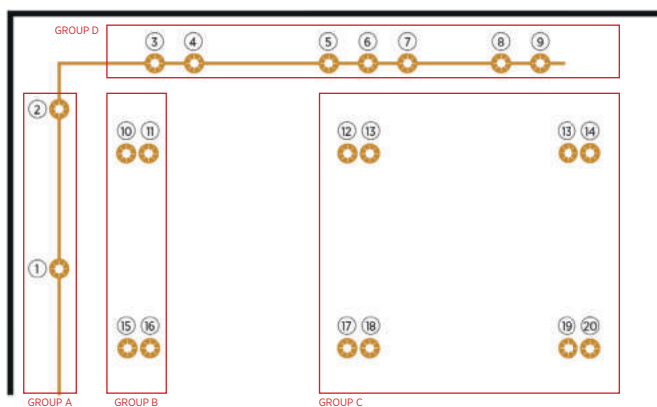

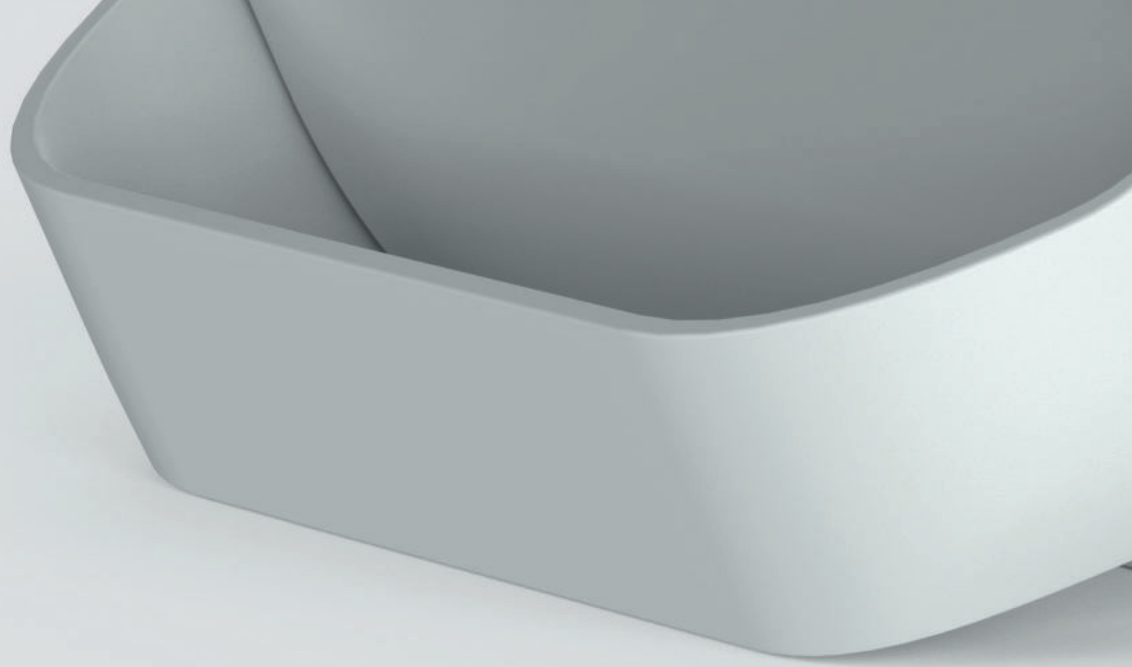

THE FUTURE IS NOW!

PROLICHT WORKS WITH MATTER



THE NEW SYMBOL OF CONNECTIVITY!

Imagine a world where all your devices seamlessly work together.
The idea is simple. The impact is powerful.

OUR PRODUCTS ARE READY!

Configure now your MATTER enabled lighting solution.
PROLICHT is offering as one of the first companies in the lighting industry, the standard matter for more than 1.000 light fittings in over 50.000 possible configurations. From now on our downlights, tracks and luminaires can be controlled together with your other devices in your smart home via just one interface.

THE FIRST SMART LIGHTING SHOWROOM IN THE WORLD

Learn about all the ways you can integrate the new standard into your project and make your lighting smart.
You want to visit us? We are looking forward to you welcome you in the heart of the Alps!



WWW.PROLICHT.AT

CONFIGURATION MAKES A DIFFERENCE


Luminaires can play an important role in your room design, which means that you need to have unlimited configurability. And that's what we at PROLICHT can give you. With all our lighting solutions.

Try it out and see for yourself what it means to create your own, tailor-made product from millions of possible combinations - with the help of our unique 3D configurator.

MAKE IT YOURS!

CONFIGURE ONLINE:
PROLICHT.AT/MINIMALTRACK



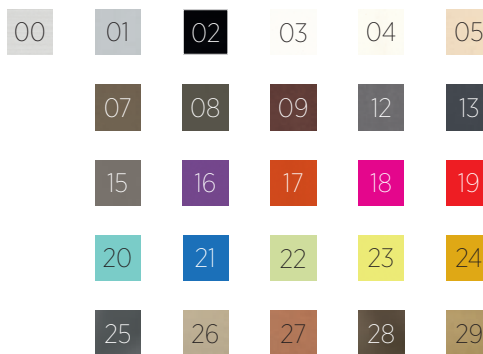

RAL Classic or any other special color on request



MINIMAL TRACK



BEAMWIDTH | LEGEND

Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	M	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°



PHOTO | ARMIN KUPRIAN

IMAGINE MICRO 20

IMAGINE MICRO 35

IMAGINE MICRO 20

IMAGINE MICRO 35



ADAPTER ■

ADAPTER ■

ADAPTER □

ADAPTER □

COLOR TEMPERATURE CCT



BEAMWIDTH

SPOT 18° up to MEDIUM 26°



COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

IMAGINE MICRO

DESCRIPTION	DIMENSION / mm	CCT / K			LUMEN MAX.	WATT	CRI	ART.-N° ON/OFF	ART.-N° DALI
IMAGINE MICRO 20	Ø 23 H: 50	2700	3000	4000	236	3.7	90	7-02825-00	7-02825-02
IMAGINE MICRO 35	Ø 35 H: 76	2700	3000	4000	669	8.6	90	7-02845-00	7-02845-02




HANGOVER PLUG 30

HANGOVER PLUG 40

HANGOVER PLUG MICRODOT




CAN-HAVE ACCESSORY: SHINE RING



COLOR TEMPERATURE CCT



BEAMWIDTH





DIRECT / INDIRECT



HANGOVER

DESCRIPTION	DIMENSION / mm			CCT / K			LUMEN MAX.	WATT	CRI	ART.-N° L150	ART.-N° L300	ART.-N° L450	
HANGOVER PLUG 30	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	446	6.5	90	7-02233-02	7-02235-02	7-02237-02
HANGOVER PLUG 40	Ø 40 x	L: 150	L: 300	L: 450	2700	3000	4000	868	9.8	90	7-02239-02	7-02240-02	7-02241-02
HANGOVER PLUG MICRODOT	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	352	6.5	90	7-02234-02	7-02236-02	7-02238-02
HANGOVER PLUG 75	Ø 75 x	L: 150	•	•	2700	3000	4000	951	10	90	7-02242-02	•	•
HANGOVER PLUG 75	Ø 75 x	L: 150	•	•	2700	3000	4000	1829	20	90	7-02243-02	•	•




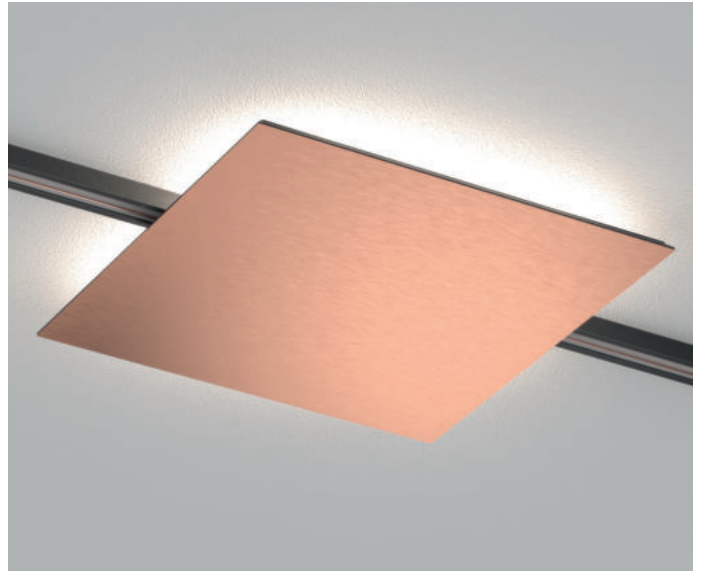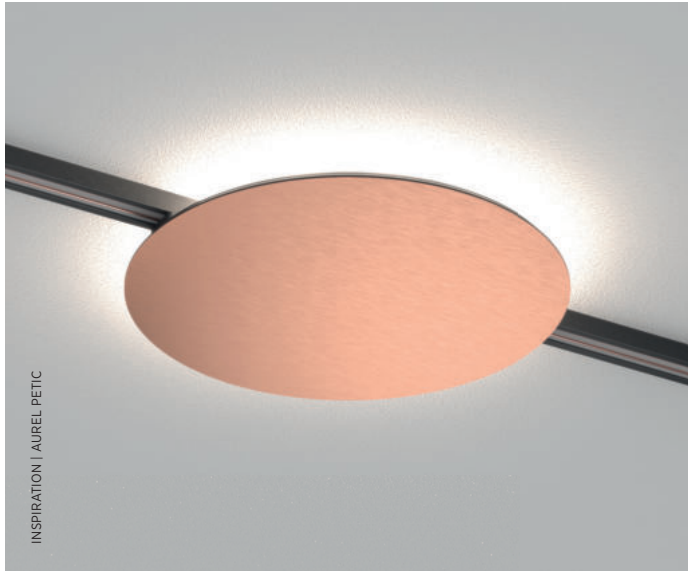

INSPIRATION | AUREL PETIC

DISQ METAL ROUND

DISQ METAL SQUARE



CAN-HAVE ACCESSORY: AURA COVER

YELLOW

ORANGE

RED

BLUE

GREEN



COLOR TEMPERATURE CCT

2700 K



BEAMWIDTH

INDIRECT



DISQ METAL ROUND & SQUARE

COPPER

STAINLESS STEEL

CHROME



DISQ METAL ROUND & SQUARE

DESCRIPTION	DIMENSION / mm	CCT / K	LUMEN MAX.	WATT	CRI	ART.-N°
DISQ ROUND METAL	Ø 206	2700 • •	400	5.1	90	7-02152-02
DISQ SQUARE METAL	216 x 216	2700 • •	400	5.1	90	7-02154-02



DISQ ROUND

DISQ SQUARE



CAN-HAVE ACCESSORY: AURA COVER

YELLOW

ORANGE

RED

BLUE

GREEN



COLOR TEMPERATURE CCT

2700 K



BEAMWIDTH

INDIRECT



DISQ ROUND & SQUARE

DESCRIPTION	DIMENSION / mm	CCT / K	LUMEN MAX.	WATT	CRI	ART.-N°
DISQ METAL ROUND	Ø 206	2700 • •	400	5.1	90	7-02153-02
DISQ METAL SQUARE	216 x 216	2700 • •	400	5.1	90	7-02155-02





PHOTO: LARMIN KUPRIAN

SNOOKER

SNOOKER SHINE



CAN-HAVE ACCESSORY: SHINE RING

WHITE YELLOW ORANGE RED BLUE GREEN



COLOR TEMPERATURE CCT

2700 K 3000 K 4000 K



BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°



SNOOKER

DESCRIPTION	DIAMETER	CCT / K			LUMEN MAX.	WATT	CRI	ART.-N°
SNOOKER	Ø 72 mm	2700	3500	4000	352	6.5	90	7-02232-02



SNOOKER METAL SNOOKER METAL SHINE



CAN-HAVE ACCESSORY: SHINE RING

WHITE YELLOW ORANGE RED BLUE GREEN



COLOR TEMPERATURE CCT



BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°



SNOOKER METAL

CHROME



SNOOKER METAL (CHROME)

DESCRIPTION	DIAMETER	CCT / K			LUMEN MAX.	WATT	CRI	ART.-N°
SNOOKER METAL	Ø 72 mm	2700	3500	4000	352	6.5	90	7-02404-02
SNOOKER METAL SHINE	Ø 72 mm	2700	3500	4000	352	6.5	90	7-02415-02



PHOTO | ARMIN KUPPRIAN



CHROME | -CH



COPPER | -CO



GOLD | -GO



SMOKE | -SM



ON

OFF

COLOR TEMPERATURE CCT

3000 K



BEAMWIDTH

DIRECT



MELT MINI

DESCRIPTION	DIAMETER	CCT / K	LUMEN MAX.	WATT	CRI	ART.-N° 2-4 m	ART.-N° 10 m	ART.-N° 1.1 m
MELT MINI CHROME	Ø 280 mm	3000	220	7	80	TD-414-0012CH	TD-414-0012CH-10M	TD-414-0012CH-1M
MELT MINI COPPER	Ø 280 mm	3000	220	7	80	TD-414-0012CO	TD-414-0012CO-10M	TD-414-0012CO-1M
MELT MINI GOLD	Ø 280 mm	3000	220	7	80	TD-414-0012GO	TD-414-0012GO-10M	TD-414-0012GO-1M
MELT MINI SMOKE	Ø 280 mm	3000	220	7	80	TD-414-0012SM	TD-414-0012SM-10M	TD-414-0012SM-1M



OPAL SMALL



ON

COLOR TEMPERATURE CCT

3000 K



BEAMWIDTH

DIRECT



OPAL SMALL

DESCRIPTION	DIAMETER	CCT / K	LUMEN MAX.	WATT	CRI	ART.-N° 2-4 m	ART.-N° 10 m	ART.-N° 1.1 m
OPAL SMALL	Ø 250 mm	3000	220	7	80	TD-414-0032OP	TD-414-0032OP-10M	TD-414-0032OP-1M





MAGIQ MICRO



ADAPTER ■

ADAPTER □

COLOR TEMPERATURE CCT

2700 K 3000 K



BEAMWIDTH

DIRECT



WIDE FLOOD 54°

COLOR

25 PROLICHT COLORS



RAL Classic or any other special color on request

MAGIQ MICRO

DESCRIPTION	DIMENSION / mm	CCT / K		LUMEN MAX.	WATT	CRI	ART.-N° BLACK	ART.-N° WHITE
MAGIQ MICRO	L: 300	2700	3000	• 365	5.5	90	7-02874-02	7-02400-02

MICROLINE



COLOR TEMPERATURE CCT

2700 K

3000 K



DIFFUSE



MICROLINE







DESCRIPTION	DIMENSION / mm	CCT / K		LUMEN MAX.	WATT	CRI	ART.-N°
MICROLINE	L: 674 (508+166)	2700	3000	• 386	8	90	7-02401-02
MICROLINE	L: 1174 (1008+166)	2700	3000	• 772	15.8	90	7-02402-02
MICROLINE	L: 1674 (1508+166)	2700	3000	• 1158	24	90	7-02403-02









MINIMAL TRACK | COMPONENTS

ARTICLE	DESCRIPTION	COLOR	ART.-N°
	TRACK POWDER COATED 1000 mm	1-29	350-1885
	TRACK POWDER COATED 2000 mm	1-29	350-1886
	TRACK POWDER COATED 3000 mm	1-29	350-1887
	CURVED TRACK Ø 1600 mm 45°	1-29	350-1894
	CURVED TRACK Ø 1600 mm 90°	1-29	350-1895
	CURVED TRACK Ø 1600 mm 180°	1-29	350-1904
	MOUNTING SCREWS Set 50 pieces		800-1427

MINIMAL TRACK | COMPONENTS BLACK ■










ARTICLE	DESCRIPTION	COLOR	ART.-N°
	TRACKMASK 5 m	●	350-1896
	X-CONNECTOR	1-29	350-2283
	T-CONNECTOR	1-29	350-2284
	LINEAR CONNECTOR	●	350-1868
	FLAT CORNER CONNECTOR	●	350-1869
	DIHEDRAL CORNER CONNECTOR	●	350-1870








MINIMAL TRACK | COMPONENTS WHITE

ARTICLE	DESCRIPTION	COLOR	ART-N°
	TRACKMASK LINEAR	●	350-2293
	X-CONNECTOR	1-29	350-2283
	T-CONNECTOR	1-29	350-2284
	LINEAR CONNECTOR	●	350-2272
	FLAT CORNER CONNECTOR	●	350-2279
	DIHEDRAL CORNER CONNECTOR	●	350-2277








MINIMAL TRACK | COMPONENTS BLACK

ARTICLE	DESCRIPTION	COLOR	ART.-N°
	FLEXIBLE CONNECTOR	●	350-1871
	CURVED CONNECTOR Ø 400 mm 90°	●	350-1892
	CURVED CONNECTOR Ø 800 mm 45°	●	800-1893
	ENDCAP	●	350-1872
	90° FLAT DUMMY TRACK QUICK INSTALLATION	●	350-1896
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	●	350-2283
	MINIMAL TRACK PLUG CONNECTOR 2/4 m ON/OFF	1-29	800-1450
	MINIMAL TRACK PLUG CONNECTOR 2/4 m DALI		800-1480
	MINIMAL TRACK PLUG CONNECTOR 1.1 m (BLACK) ON/OFF	1-29	800-1451
	MINIMAL TRACK PLUG CONNECTOR 1.1 m (BLACK) DALI		800-1481
	MINIMAL TRACK PLUG CONNECTOR 10 m ON/OFF	1-29	800-1484
	MINIMAL TRACK PLUG CONNECTOR 10 m DALI		800-1482





ARTICLE	DESCRIPTION	COLOR	ART.-N°
	FLEXIBLE CONNECTOR	●	350-2278
●		●	●
●		●	●
	ENDCAP	●	350-2273
	90° FLAT DUMMY TRACK QUICK INSTALLATION	●	350-2274
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	●	350-2275
	MINIMAL TRACK PLUG CONNECTOR 2/4 m ON/OFF	1-29	800-1450
	MINIMAL TRACK PLUG CONNECTOR 2/4 m DALI		800-1480
	MINIMAL TRACK PLUG CONNECTOR 1.1 m (BLACK) ON/OFF	1-29	800-1451
	MINIMAL TRACK PLUG CONNECTOR 1.1 m (BLACK) DALI		800-1481
	MINIMAL TRACK PLUG CONNECTOR 10 m ON/OFF	1-29	800-1484
	MINIMAL TRACK PLUG CONNECTOR 10 m DALI		800-1482







MINIMAL TRACK | COMPONENTS

ARTICLE	DESCRIPTION	COLOR	ART.-N°
	WALL/CEILING CABLE LOOP	1-29	350-1871
	WALL/CEILING CABLE ROLLER	1-29	350-1892
	TRACK CABLE LOOP	1-29	800-1893
	TRACK CABLE ROLLER	1-29	350-1872
	SUSPENDED ROLLER	1-29	350-1896

MINIMAL TRACK | COMPONENTS BLACK ■













ARTICLE	DESCRIPTION	COLOR	ART.-N°
	FEED UNIT END + 2.5 m SUPPLY CABLE	●	350-1866
	FEED UNIT CENTRAL + 2.5 m SUPPLY CABLE	●	350-1867
	DRIVER BOX ENDINSTALLATION ON/OFF	1-29	350-2285
	DRIVER BOX ENDINSTALLATION DALI		350-1996
	DRIVER BOX ENDINSTALLATION PUSH DIM		350-1898
	DRIVER BOX ENDINSTALLATION CASAMBI	1-29	350-1899
	DRIVER BOX ENDINSTALLATION MATTER		350-2280



MINIMAL TRACK | COMPONENTS WHITE

ARTICLE	DESCRIPTION	COLOR	ART.-N°
	FEED UNIT END + 2.5 m SUPPLY CABLE	●	350-2270
	FEED UNIT CENTRAL + 2.5 m SUPPLY CABLE	●	350-2271
	DRIVER BOX ENDINSTALLATION ON/OFF	1-29	350-2285
	DRIVER BOX ENDINSTALLATION DALI		350-1996
	DRIVER BOX ENDINSTALLATION PUSH DIM		350-1898
	DRIVER BOX ENDINSTALLATION CASAMBI	1-29	350-1899
	DRIVER BOX ENDINSTALLATION MATTER		350-2280



MINIMAL TRACK | COMPONENTS BLACK


ARTICLE	DESCRIPTION	COLOR	ART.-N°
	DRIVER BOX CENTRAL INSTALLATION ON/OFF 240 x 75 x 35 mm	1-29	350-2286
	DRIVER BOX CENTRAL INSTALLATION DALI 240 x 75 x 35 mm		350-2288
	DRIVER BOX CENTRAL INSTALLATION PUSH DIM 240 x 75 x 35 mm	1-29	350-2290
	DRIVER BOX CENTRAL INSTALLATION CASAMBI 240 x 75 x 35 mm		350-2292
	POWER SUPPLY 48 V	●	800-1893
	REMOTE SET PUSH DIM	●	350-1905
	REMOTE SET CASAMBI	●	350-1906
	REMOTE SET DALI	●	350-1998
	POWER SUPPLY 48 V ON/OFF		350-2065
	POWER SUPPLY 48 V + PUSH DIM BRIDGE FOR REMOTE INSTALLATION		350-2066
	POWER SUPPLY 48 V + CASAMBI BRIDGE FOR REMOTE INSTALLATION	●	350-2067
	POWER SUPPLY 48 V + DALI BRIDGE FOR REMOTE INSTALLATION		350-2068

ARTICLE	DESCRIPTION	COLOR	ART.-N°
	DRIVER BOX CENTRAL INSTALLATION ON/OFF 240 x 75 x 35 mm	1-29	350-2286
	DRIVER BOX CENTRAL INSTALLATION DALI 240 x 75 x 35 mm		350-2288
	DRIVER BOX CENTRAL INSTALLATION PUSH DIM 240 x 75 x 35 mm	1-29	350-2290
	DRIVER BOX CENTRAL INSTALLATION CASAMBI 240 x 75 x 35 mm		350-2292





TOM
DIXON
× PROLICHT

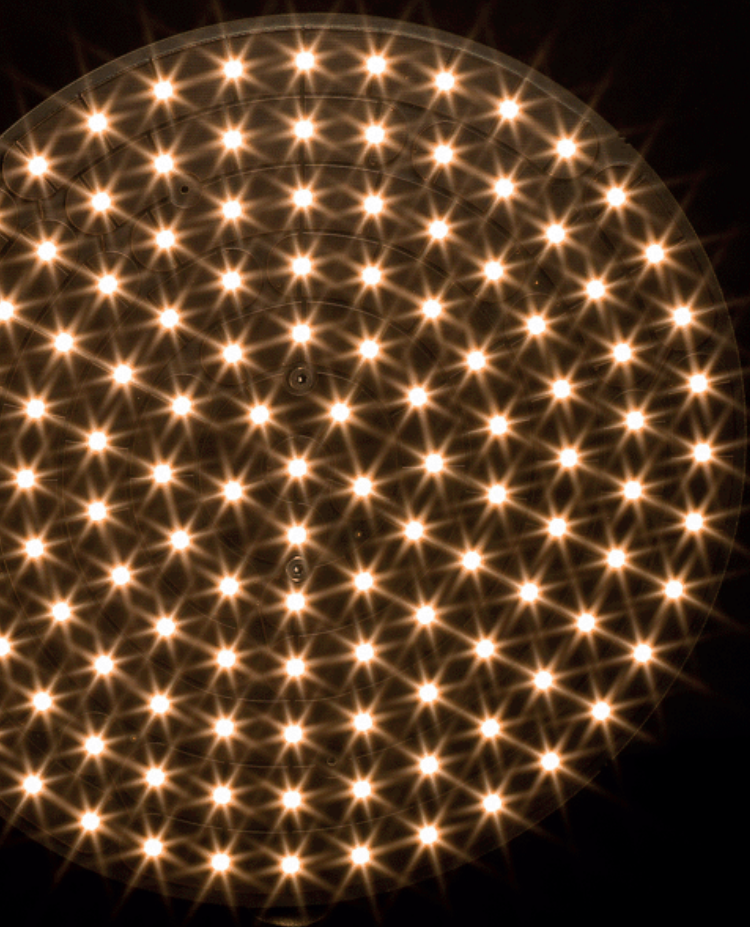

Based on the MINIMAL TRACK system, as result of PROLICHT cooperation with Tom Dixon we designed CODE: a product that merges technological expertise with a unique design vision, an innovation that could only be created together.

DISCOVER MORE ON
www.prolicht.at/code



EDITOR	Filippo Bettinzoli, PROLICHT PROLICHT GmbH Austria 6091 Neu-Götzens Gewerbepark 9 T +43 5234 33 499 F + 43 5234 33 499 22 marketing@prolicht.at www.prolicht.at
TECHNICAL SUPPORT	Romain Hoffmann
GRAPHIC DESIGN	Tonia Wiedenmann
TEXT	Julia Kopp, Philipp Juen
PRODUCT PHOTOS	Armin Kuprian, Günther Egger
PRODUCT RENDERINGS	Aurel Petic, viewture.media, brandshoot
EDITION	autumn 2022



 FOLLOW US ON
INSTAGRAM

WWW.PROLICHT.AT